



# Switching Transistor

## NPN Silicon

**MMBT4401LT1**

Motorola Preferred Device



CASE 318-08, STYLE 6  
SOT-23 (TO-236AB)

### MAXIMUM RATINGS

| Rating                         | Symbol    | Value | Unit |
|--------------------------------|-----------|-------|------|
| Collector–Emitter Voltage      | $V_{CEO}$ | 40    | Vdc  |
| Collector–Base Voltage         | $V_{CBO}$ | 60    | Vdc  |
| Emitter–Base Voltage           | $V_{EBO}$ | 6.0   | Vdc  |
| Collector Current — Continuous | $I_C$     | 600   | mAdc |

### THERMAL CHARACTERISTICS

| Characteristic  | Symbol          | Max         | Unit                      |
|---|-----------------|-------------|---------------------------|
| Total Device Dissipation FR-5 Board <sup>(1)</sup><br>$T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$         | $P_D$           | 225         | mW                        |
|   |                 | 1.8         | mW/ $^\circ\text{C}$      |
| Thermal Resistance, Junction to Ambient   | $R_{\theta JA}$ | 556         | $^\circ\text{C}/\text{W}$ |
| Total Device Dissipation<br>Alumina Substrate, <sup>(2)</sup> $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_D$           | 300         | mW                        |
|   |                 | 2.4         | mW/ $^\circ\text{C}$      |
| Thermal Resistance, Junction to Ambient   | $R_{\theta JA}$ | 417         | $^\circ\text{C}/\text{W}$ |
| Junction and Storage Temperature  | $T_J, T_{stg}$  | -55 to +150 | $^\circ\text{C}$          |

### DEVICE MARKING

MMBT4401LT1 = 2X

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Max | Unit |
|----------------|--------|-----|-----|------|
|----------------|--------|-----|-----|------|

### OFF CHARACTERISTICS

|   |               |     |     |                 |
|---|---------------|-----|-----|-----------------|
| Collector–Emitter Breakdown Voltage <sup>(3)</sup><br>( $I_C = 1.0 \text{ mAdc}, I_E = 0$ ) | $V_{(BR)CEO}$ | 40  | —   | Vdc             |
| Collector–Base Breakdown Voltage<br>( $I_C = 0.1 \text{ mAdc}, I_E = 0$ )                   | $V_{(BR)CBO}$ | 60  | —   | Vdc             |
| Emitter–Base Breakdown Voltage<br>( $I_E = 0.1 \text{ mAdc}, I_C = 0$ )                     | $V_{(BR)EBO}$ | 6.0 | —   | Vdc             |
| Base Cutoff Current<br>( $V_{CE} = 35 \text{ Vdc}, V_{EB} = 0.4 \text{ Vdc}$ )              | $I_{BEV}$     | —   | 0.1 | $\mu\text{Adc}$ |
| Collector Cutoff Current<br>( $V_{CE} = 35 \text{ Vdc}, V_{EB} = 0.4 \text{ Vdc}$ )         | $I_{CEX}$     | —   | 0.1 | $\mu\text{Adc}$ |

- FR-5 =  $1.0 \times 0.75 \times 0.062 \text{ in.}$
- Alumina =  $0.4 \times 0.3 \times 0.024 \text{ in.}$  99.5% alumina.
- Pulse Test: Pulse Width  $\leq 300 \mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .

Thermal Clad is a trademark of the Bergquist Company.

**Preferred** devices are Motorola recommended choices for future use and best overall value.

# MMBT4401LT1

## ELECTRICAL CHARACTERISTICS (continued) ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic  | Symbol        | Min                         | Max                     | Unit |
|---|---------------|-----------------------------|-------------------------|------|
| <b>ON CHARACTERISTICS(3)</b>  |               |                             |                         |      |
| DC Current Gain<br>( $I_C = 0.1 \text{ mAdc}$ , $V_{CE} = 1.0 \text{ Vdc}$ )<br>( $I_C = 1.0 \text{ mAdc}$ , $V_{CE} = 1.0 \text{ Vdc}$ )<br>( $I_C = 10 \text{ mAdc}$ , $V_{CE} = 1.0 \text{ Vdc}$ )<br>( $I_C = 150 \text{ mAdc}$ , $V_{CE} = 1.0 \text{ Vdc}$ )<br>( $I_C = 500 \text{ mAdc}$ , $V_{CE} = 2.0 \text{ Vdc}$ ) | $h_{FE}$      | 20<br>40<br>80<br>100<br>40 | —<br>—<br>—<br>300<br>— | —    |
| Collector–Emitter Saturation Voltage<br>( $I_C = 150 \text{ mAdc}$ , $I_B = 15 \text{ mAdc}$ )<br>( $I_C = 500 \text{ mAdc}$ , $I_B = 50 \text{ mAdc}$ )  | $V_{CE(sat)}$ | —<br>—                      | 0.4<br>0.75             | Vdc  |
| Base–Emitter Saturation Voltage<br>( $I_C = 150 \text{ mAdc}$ , $I_B = 15 \text{ mAdc}$ )<br>( $I_C = 500 \text{ mAdc}$ , $I_B = 50 \text{ mAdc}$ )   | $V_{BE(sat)}$ | 0.75<br>—                   | 0.95<br>1.2             | Vdc  |

## SMALL–SIGNAL CHARACTERISTICS

|   |          |     |     |                  |
|---|----------|-----|-----|------------------|
| Current–Gain — Bandwidth Product<br>( $I_C = 20 \text{ mAdc}$ , $V_{CE} = 10 \text{ Vdc}$ , $f = 100 \text{ MHz}$ ) | $f_T$    | 250 | —   | MHz              |
| Collector–Base Capacitance<br>( $V_{CB} = 5.0 \text{ Vdc}$ , $I_E = 0$ , $f = 1.0 \text{ MHz}$ )                    | $C_{cb}$ | —   | 6.5 | pF               |
| Emitter–Base Capacitance<br>( $V_{EB} = 0.5 \text{ Vdc}$ , $I_C = 0$ , $f = 1.0 \text{ MHz}$ )                      | $C_{eb}$ | —   | 30  | pF               |
| Input Impedance<br>( $I_C = 1.0 \text{ mAdc}$ , $V_{CE} = 10 \text{ Vdc}$ , $f = 1.0 \text{ kHz}$ )                 | $h_{ie}$ | 1.0 | 15  | k $\Omega$       |
| Voltage Feedback Ratio<br>( $I_C = 1.0 \text{ mAdc}$ , $V_{CE} = 10 \text{ Vdc}$ , $f = 1.0 \text{ kHz}$ )          | $h_{re}$ | 0.1 | 8.0 | $\times 10^{-4}$ |
| Small–Signal Current Gain<br>( $I_C = 1.0 \text{ mAdc}$ , $V_{CE} = 10 \text{ Vdc}$ , $f = 1.0 \text{ kHz}$ )       | $h_{fe}$ | 40  | 500 | —                |
| Output Admittance<br>( $I_C = 1.0 \text{ mAdc}$ , $V_{CE} = 10 \text{ Vdc}$ , $f = 1.0 \text{ kHz}$ )               | $h_{oe}$ | 1.0 | 30  | $\mu\text{mhos}$ |

## SWITCHING CHARACTERISTICS

|              |  |       |   |     |    |
|--------------|--|-------|---|-----|----|
| Delay Time   | $(V_{CC} = 30 \text{ Vdc}$ , $V_{EB} = 2.0 \text{ Vdc}$ ,<br>$I_C = 150 \text{ mAdc}$ , $I_{B1} = 15 \text{ mAdc}$ ) | $t_d$ | — | 15  | ns |
| Rise Time    |  | $t_r$ | — | 20  |    |
| Storage Time | $(V_{CC} = 30 \text{ Vdc}$ , $I_C = 150 \text{ mAdc}$ ,<br>$I_{B1} = I_{B2} = 15 \text{ mAdc}$ )                     | $t_s$ | — | 225 | ns |
| Fall Time    |  | $t_f$ | — | 30  |    |

3. Pulse Test: Pulse Width  $\leq 300 \mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .

## SWITCHING TIME EQUIVALENT TEST CIRCUITS

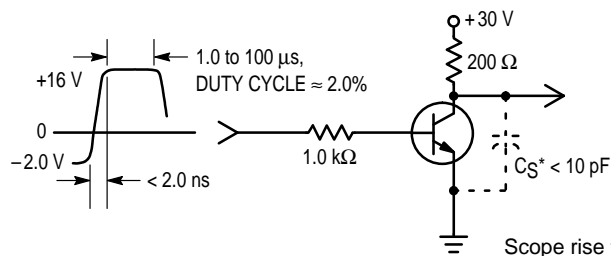


Figure 1. Turn–On Time

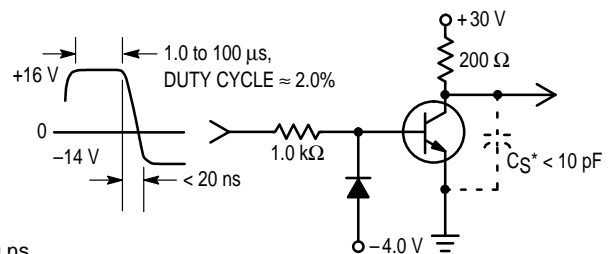


Figure 2. Turn–Off Time

TRANSIENT CHARACTERISTICS

— 25°C    - - - 100°C

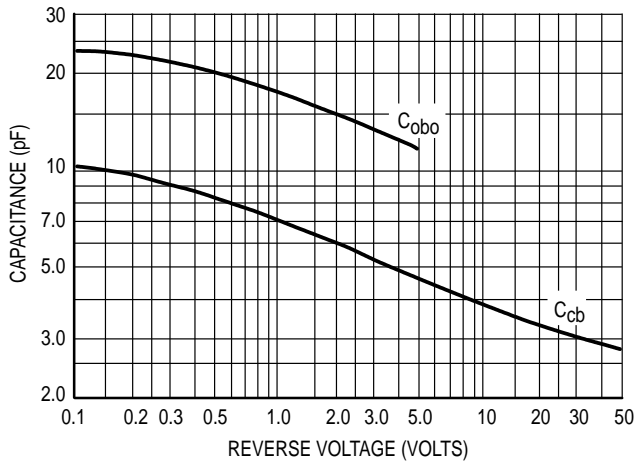


Figure 3. Capacitances

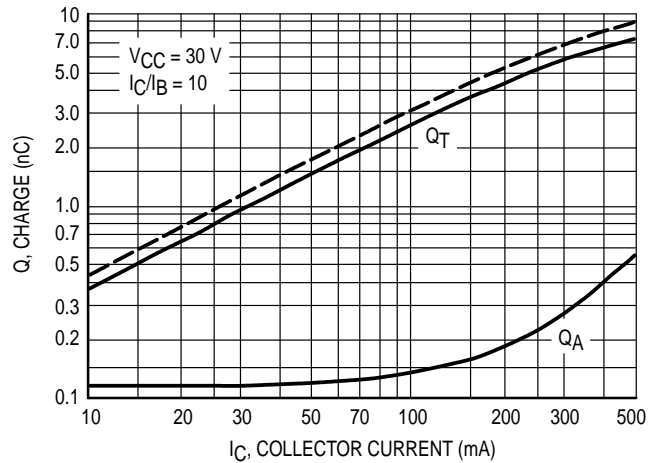


Figure 4. Charge Data

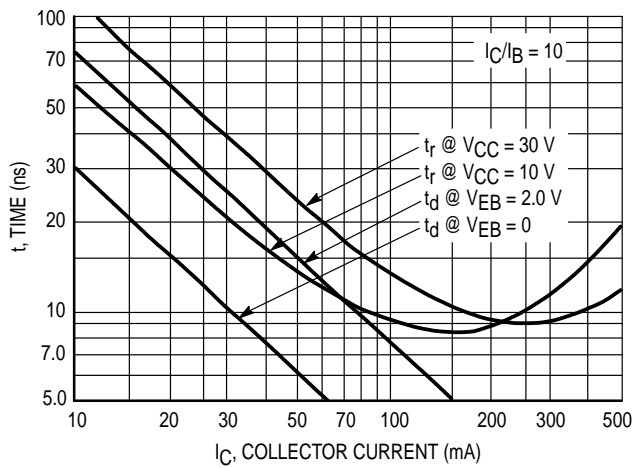


Figure 5. Turn-On Time

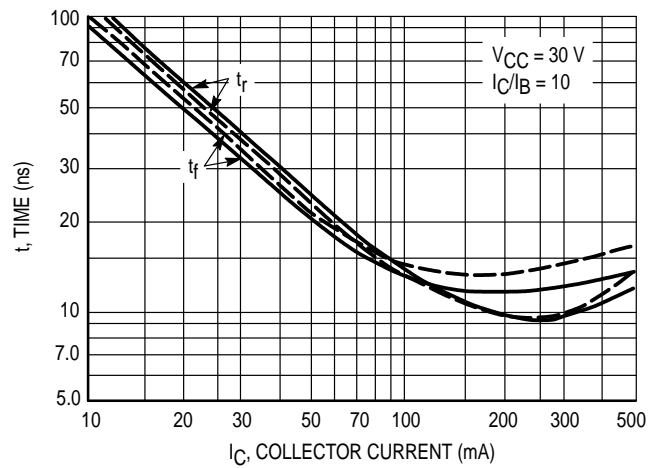


Figure 6. Rise and Fall Times

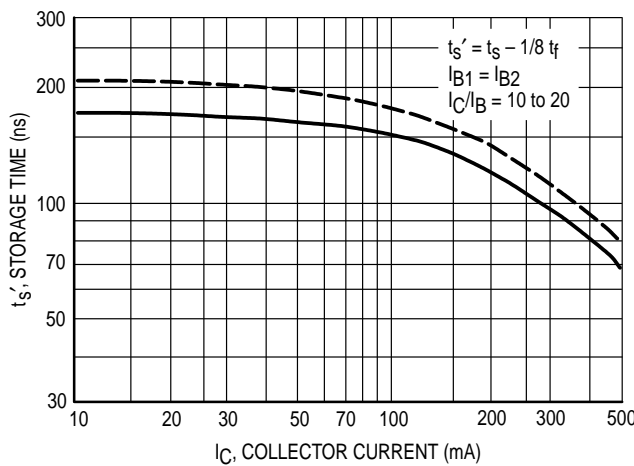


Figure 7. Storage Time

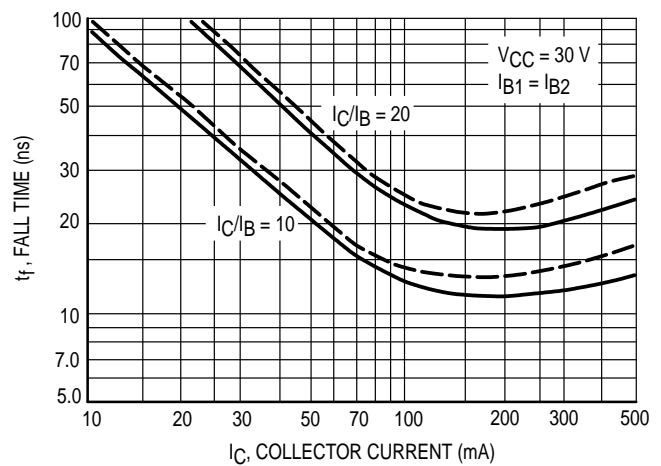


Figure 8. Fall Time

SMALL-SIGNAL CHARACTERISTICS

NOISE FIGURE

$V_{CE} = 10 \text{ Vdc}$ ,  $T_A = 25^\circ\text{C}$

Bandwidth = 1.0 Hz

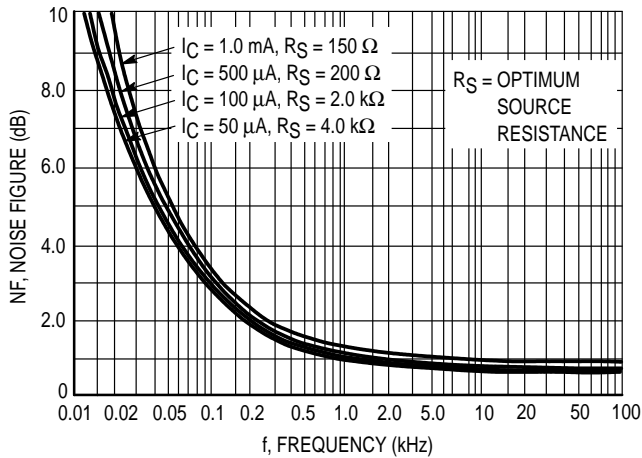


Figure 9. Frequency Effects

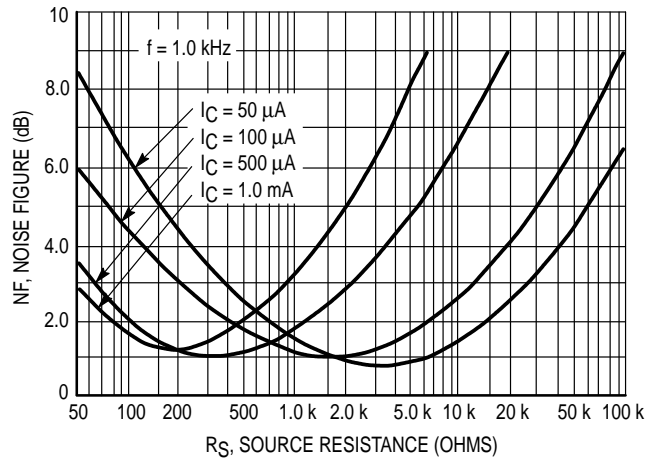


Figure 10. Source Resistance Effects

h PARAMETERS

$V_{CE} = 10 \text{ Vdc}$ ,  $f = 1.0 \text{ kHz}$ ,  $T_A = 25^\circ\text{C}$

This group of graphs illustrates the relationship between  $h_{fe}$  and other "h" parameters for this series of transistors. To obtain these curves, a high-gain and a low-gain unit were

selected from the MMBT4401LT1 lines, and the same units were used to develop the correspondingly numbered curves on each graph.

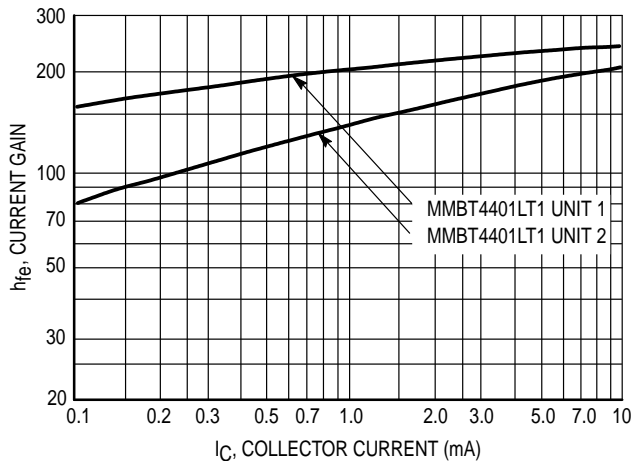


Figure 11. Current Gain

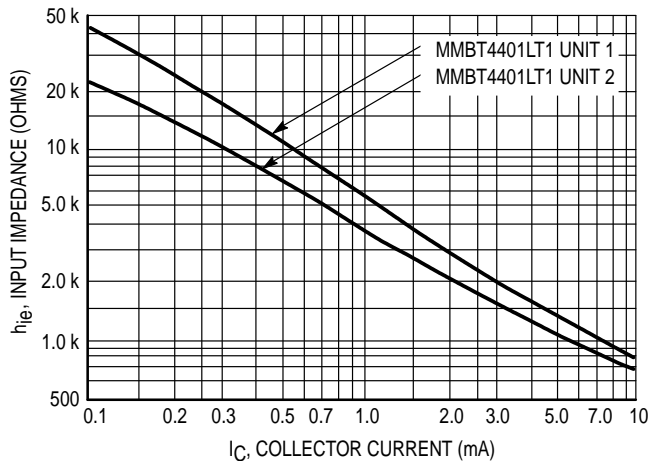


Figure 12. Input Impedance

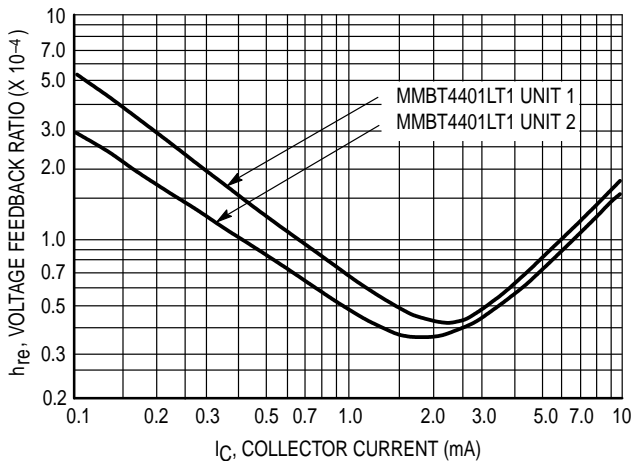


Figure 13. Voltage Feedback Ratio

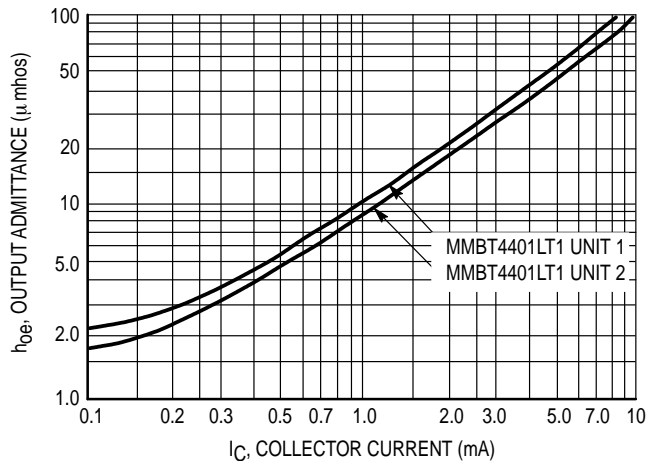


Figure 14. Output Admittance

STATIC CHARACTERISTICS

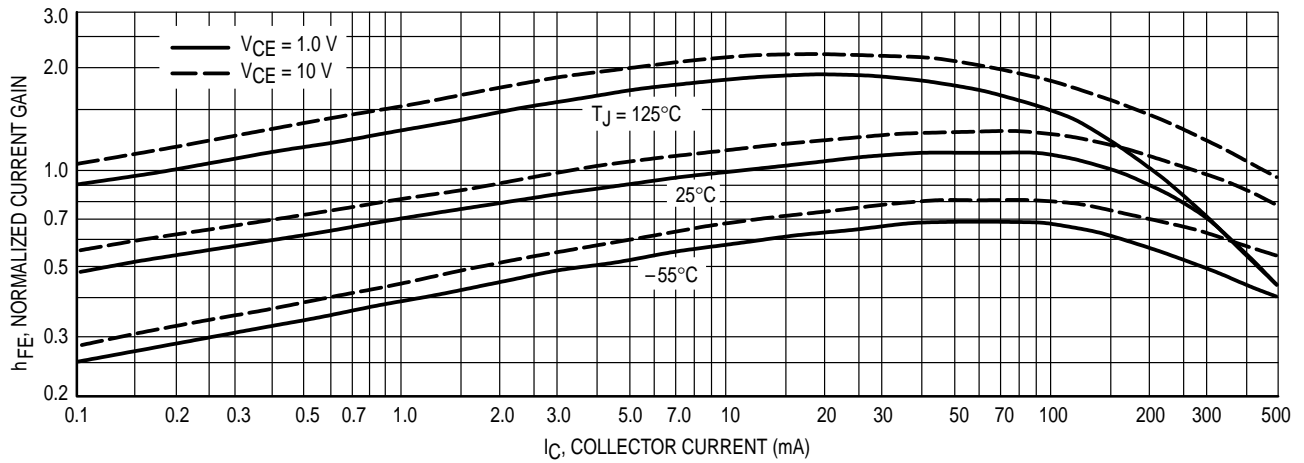


Figure 15. DC Current Gain

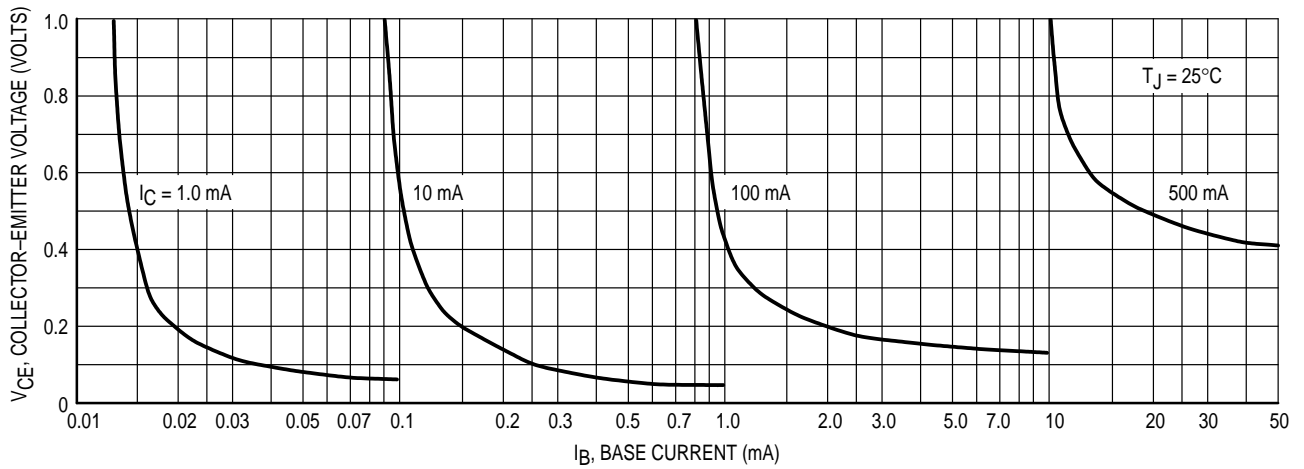


Figure 16. Collector Saturation Region

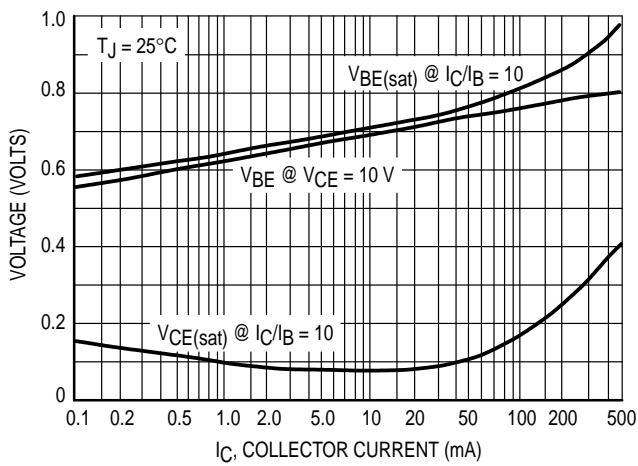


Figure 17. "On" Voltages

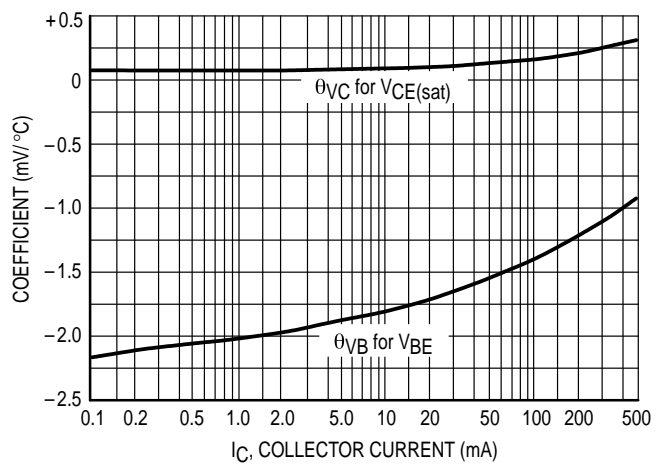



Figure 18. Temperature Coefficients

## INFORMATION FOR USING THE SOT-23 SURFACE MOUNT PACKAGE

### MINIMUM RECOMMENDED FOOTPRINT FOR SURFACE MOUNTED APPLICATIONS

Surface mount board layout is a critical portion of the total design. The footprint for the semiconductor packages must be the correct size to insure proper solder connection

interface between the board and the package. With the correct pad geometry, the packages will self align when subjected to a solder reflow process.

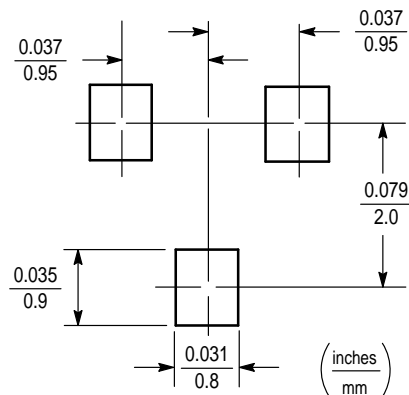

**SOT-23**

### SOT-23 POWER DISSIPATION

The power dissipation of the SOT-23 is a function of the pad size. This can vary from the minimum pad size for soldering to a pad size given for maximum power dissipation. Power dissipation for a surface mount device is determined by  $T_{J(\max)}$ , the maximum rated junction temperature of the die,  $R_{\theta JA}$ , the thermal resistance from the device junction to ambient, and the operating temperature,  $T_A$ . Using the values provided on the data sheet for the SOT-23 package,  $P_D$  can be calculated as follows:

$$P_D = \frac{T_{J(\max)} - T_A}{R_{\theta JA}}$$

The values for the equation are found in the maximum ratings table on the data sheet. Substituting these values into the equation for an ambient temperature  $T_A$  of 25°C, one can calculate the power dissipation of the device which in this case is 225 milliwatts.

$$P_D = \frac{150^\circ\text{C} - 25^\circ\text{C}}{556^\circ\text{C/W}} = 225 \text{ milliwatts}$$

The 556°C/W for the SOT-23 package assumes the use of the recommended footprint on a glass epoxy printed circuit board to achieve a power dissipation of 225 milliwatts. There are other alternatives to achieving higher power dissipation from the SOT-23 package. Another alternative would be to use a ceramic substrate or an aluminum core board such as Thermal Clad™. Using a board material such as Thermal Clad, an aluminum core board, the power dissipation can be doubled using the same footprint.



### SOLDERING PRECAUTIONS

The melting temperature of solder is higher than the rated temperature of the device. When the entire device is heated to a high temperature, failure to complete soldering within a short time could result in device failure. Therefore, the following items should always be observed in order to minimize the thermal stress to which the devices are subjected.

- Always preheat the device.
- The delta temperature between the preheat and soldering should be 100°C or less.\*
- When preheating and soldering, the temperature of the leads and the case must not exceed the maximum temperature ratings as shown on the data sheet. When using infrared heating with the reflow soldering method, the difference shall be a maximum of 10°C.
- The soldering temperature and time shall not exceed 260°C for more than 10 seconds.
- When shifting from preheating to soldering, the maximum temperature gradient shall be 5°C or less.
- After soldering has been completed, the device should be allowed to cool naturally for at least three minutes. Gradual cooling should be used as the use of forced cooling will increase the temperature gradient and result in latent failure due to mechanical stress.
- Mechanical stress or shock should not be applied during cooling.

\* Soldering a device without preheating can cause excessive thermal shock and stress which can result in damage to the device.

PACKAGE DIMENSIONS

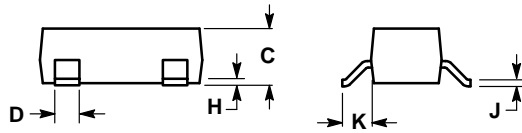

NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

| DIM | INCHES |        | MILLIMETERS |       |
|-----|--------|--------|-------------|-------|
|     | MIN    | MAX    | MIN         | MAX   |
| A   | 0.1102 | 0.1197 | 2.80        | 3.04  |
| B   | 0.0472 | 0.0551 | 1.20        | 1.40  |
| C   | 0.0350 | 0.0440 | 0.89        | 1.11  |
| D   | 0.0150 | 0.0200 | 0.37        | 0.50  |
| G   | 0.0701 | 0.0807 | 1.78        | 2.04  |
| H   | 0.0005 | 0.0040 | 0.013       | 0.100 |
| J   | 0.0034 | 0.0070 | 0.085       | 0.177 |
| K   | 0.0180 | 0.0236 | 0.45        | 0.60  |
| L   | 0.0350 | 0.0401 | 0.89        | 1.02  |
| S   | 0.0830 | 0.0984 | 2.10        | 2.50  |
| V   | 0.0177 | 0.0236 | 0.45        | 0.60  |

STYLE 6:

- PIN 1. BASE
2. EMITTER
3. COLLECTOR

**CASE 318-08  
SOT-23 (TO-236AB)  
ISSUE AE**

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

**How to reach us:**

**USA/EUROPE:** Motorola Literature Distribution;  
P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447

**JAPAN:** Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, Toshikatsu Otsuki,  
6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

**MFAX:** RMFAX0@email.sps.mot.com - TOUCHTONE (602) 244-6609  
**INTERNET:** <http://Design-NET.com>

**HONG KONG:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

