

## Descriptions

- Switching application
  - Interface circuit and driver circuit application

## Features


- With built-in bias resistors
  - Simplify circuit design
  - Reduce a quantity of parts and manufacturing process
  - High packing density

## **Ordering Information**


Type NO.	Marking	Package Code
SRC1204S	RC4	SOT-23

## Outline Dimensions

**unit :** mm

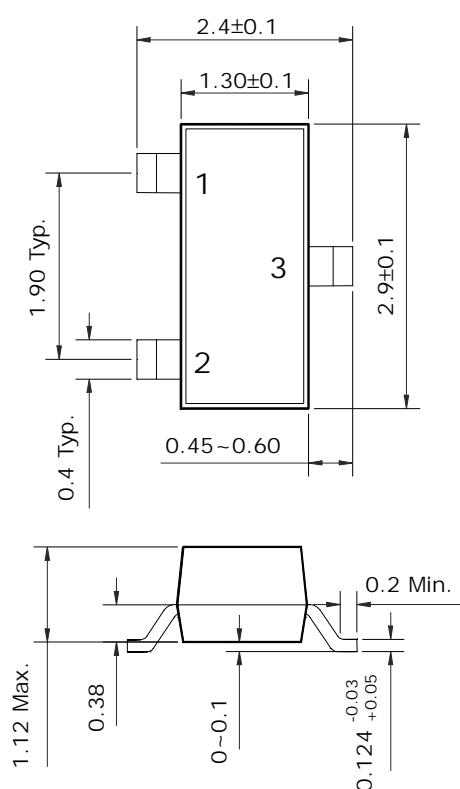

- **Equivalent Circuit**

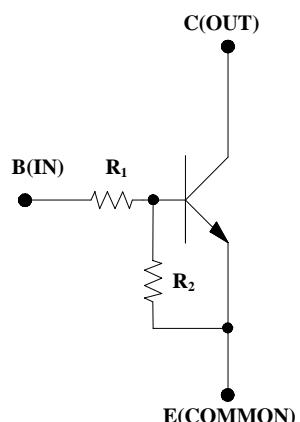

$R_1$	$R_2$
$47\text{K}\Omega$	$47\text{K}\Omega$

## **PIN Connections**

**Absolute maximum ratings**

(Ta=25°C)

<b>Characteristic</b>	<b>Symbol</b>	<b>Ratings</b>	<b>Unit</b>
Out Voltage	V <sub>O</sub>	50	V
Input Voltage	V <sub>I</sub>	40	V
Out Current	I <sub>O</sub>	100	mA
Power Dissipation	P <sub>D</sub>	200	mW
Junction Temperature	T <sub>J</sub>	150	°C
Storage Temperature	T <sub>STG</sub>	-55 ~ 150	°C

**Electrical Characteristics**


(Ta=25°C)

<b>Characteristic</b>	<b>Symbol</b>	<b>Test Condition</b>	<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Unit</b>
Output Cut-off Current	I <sub>O(OFF)</sub>	V <sub>O</sub> =50V, V <sub>I</sub> =0	-	-	500	nA
DC Current Gain	G <sub>I</sub>	V <sub>O</sub> =5V, I <sub>O</sub> =10mA	80	200	-	-
Output Voltage	V <sub>O(ON)</sub>	I <sub>O</sub> =10mA, I <sub>I</sub> =0.5mA	-	0.1	0.3	V
Input Voltage (ON)	V <sub>I(ON)</sub>	V <sub>O</sub> =0.2V, I <sub>O</sub> =5mA	-	2.8	5.0	V
Input Voltage (OFF)	V <sub>I(OFF)</sub>	V <sub>O</sub> =5V, I <sub>O</sub> =0.1mA	1.0	1.2	-	V
Transition Frequency	f <sub>T</sub> <sup>*</sup>	V <sub>O</sub> =10V, I <sub>O</sub> =5mA	-	200	-	MHz
Input Current	I <sub>I</sub>	V <sub>I</sub> =5V	-	-	0.18	mA


\*: Characteristic of Transistor Only

## Electrical Characteristic Curves

**Fig. 1  $I_O - V_{I(ON)}$**

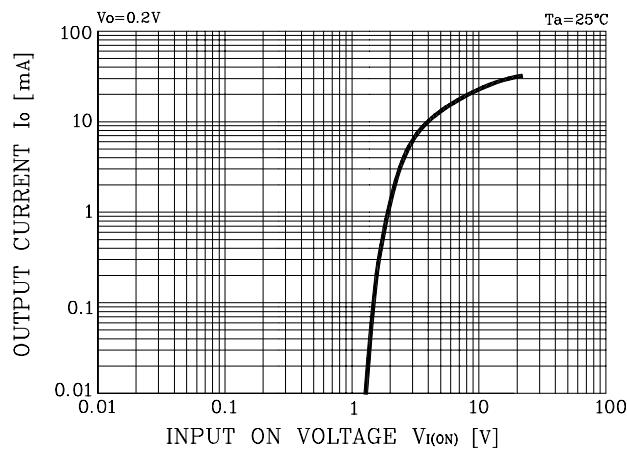

**Fig. 2  $I_O - V_{I(OFF)}$**

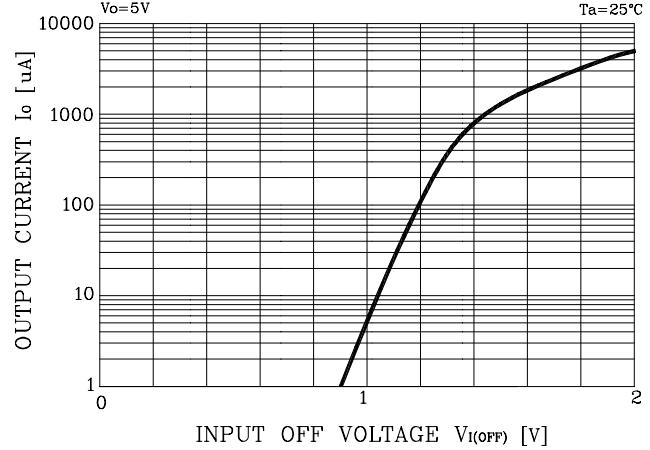

**Fig. 3  $G_I - I_O$**

