

Features

- Read + 2 write channel laser driver with oscillator and fast I/V amplifier plus a separate ROM laser driver with oscillator
- 200V/μs I/V amplifier
- 100X gain, 100mA low noise read channel
- 250X gain, 300mA and 150X gain, 150mA write channels
- 500MHz, 100mA_{p-p} oscillator
- Write rise/fall times = 0.8ns
- Single +5V supply

Applications

- Combo CD-RW + DVD-ROM
- CD-RW to 16X
- CD-R to 32X
- Writable optical disk drives

Ordering Information

Part No	Temp. Range	Package	Outline #
EL6140CU	-40°C to +85°C	24-Pin QSOP	MDP0040

General Description


The EL6140C is a combination read + 2 write level laser driver and I/V amplifier, with an extra read + oscillator ROM channel for use in dual-laser 'combo' applications. A separate (amplitude and frequency) oscillator modulates the selected output for laser noise reduction during read or write.

The CD pin, when high, selects the CD (write) laser. Positive current supplied to the IIN lines, through a user selected external resistor, allow the full scale range of each amplifier to be matched to the full scale range of the users control DACs. When the write laser is selected, and the WEN pins are switched low, the respective current is summed to the output with 1ns rise and fall times. When the CD pin is low, the ROM laser diode is driven by output I_{OUT2}, and no current will appear at output I_{OUT1}.

The 100mA_{p-p} (max) oscillator is switched on and off by the OSCEN line. The CD line allows the oscillator to operate at different amplitudes and frequencies for each laser.

The entire chip is powered down when ENABLE is low. The user can define the gain of the I/V amplifier. With a slew rate of 200V/μs, the I/V amplifier can normally settle to 1% within 30ns.

Connection Diagram

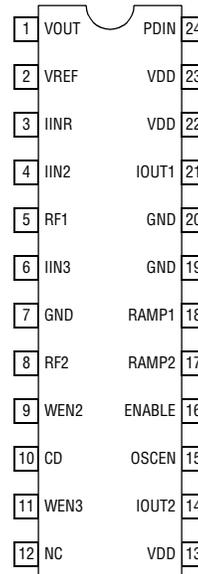

April 18, 2002

EL6140C*Dual Laser Driver with APC Amp***PRODUCT BRIEF**

Effective May 15, 2002, Elantec, a leader in high performance analog products, is now a part of Intersil Corporation.

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems.
Intersil Corporation's quality certifications can be viewed at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com

**Sales Office Headquarters****NORTH AMERICA**

Intersil Corporation
7585 Irvine Center Drive
Suite 100
Irvine, CA 92618
TEL: 949-341-7000
FAX: 949-341-7123

Elantec
675 Trade Zone Blvd.
Milpitas, CA 95035
TEL: 408-945-1323
800: 888-ELANTEC
FAX: 408-945-9305

EUROPE

Intersil Europe Sarl
Avenue William Fraisse 3
1006 Lausanne
Switzerland
TEL: +41-21-6140560
FAX: +41-21-6140579

ASIA

Intersil Corporation
Unit 1804 18/F Guangdong Water Bldg.
83 Austin Road
TST, Kowloon Hong Kong
TEL: +852-2723-6339
FAX: +852-2730-1433