


SCHMITT INVERTER

FEATURES


- High output drive : $\pm 24\text{mA}(\text{min.}) @ V_{CC}=3\text{V}$.
- Super high speed operation : $t_{pd} 3.2\text{ns}(\text{typ.}) @ V_{CC}=5\text{V}, 50\text{pF}$.
- Operation voltage range : $V_{CC(\text{opr})}=1.65\text{~}5.5\text{V}$.
- Power down protection is provided on all inputs and outputs.

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)


CHARACTERISTIC	SYMBOL	RATING	UNIT
Power Supply Voltage	V_{CC}	-0.5~7	V
DC Input Voltage	V_{IN}	-0.5~ $V_{CC}+0.5$	V
DC Output Voltage	V_{OUT}	-0.5~ $V_{CC}+0.5$	V
Input Diode Current	I_{IK}	-50	mA
Output Diode Current	I_{OK}	-50	mA
DC Output Current	I_{OUT}	± 50	mA
DC V_{CC} /ground Current	I_{CC}	± 50	mA
Power Dissipation	P_D	200	mW
Storage Temperature Range	T_{stg}	-65~150	$^\circ\text{C}$
Lead Temperature (10s)	T_L	260	$^\circ\text{C}$

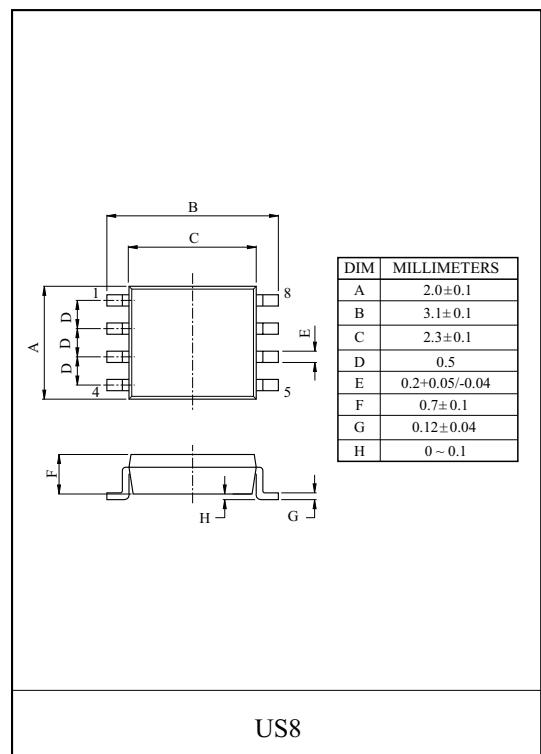

MARKING

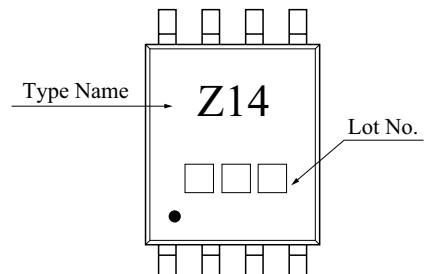

PIN CONNECTION(TOP VIEW)

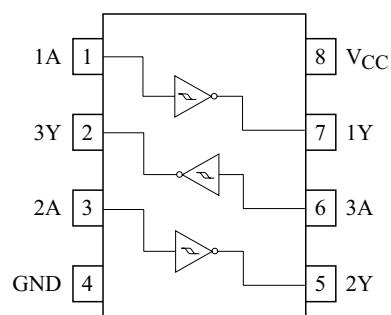


KIC7WZ14FK

Truth Table

A	Y
L	H
H	L

Logic Diagram

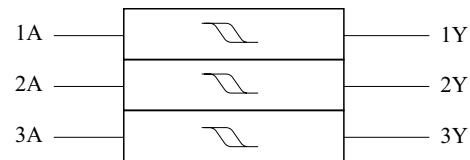

Recommended Operating Conditions

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V_{CC}	1.65~5.5	V
		1.5~5.5 (Note1)	
Input Voltage	V_{IN}	0~5.5	V
Output Voltage	V_{OUT}	0~5.5 (Note2)	V
		0~ V_{CC} (Note3)	
Operating Temperature	T_{opr}	-40~85	°C
Input Rise and Fall Time	d_t/d_v	0~20 ($V_{CC}=1.8V \pm 0.15V$, $2.5V \pm 0.2V$)	ns/V
		0~10 ($V_{CC}=3.3V \pm 0.3V$)	
		0~5 ($V_{CC}=5.5V \pm 0.5V$)	

Note1 : Data retention only.

Note2 : $V_{CC}=0V$.

Note3 : High or low state

KIC7WZ14FK

ELECTRICAL CHARACTERISTICS

DC Characteristics

CHARACTERISTIC	SYMBOL	TEST CONDITION		Ta=25 °C			Ta=-40~85 °C		UNIT				
			V _{CC} (V)	MIN.	TYP.	MAX.	MIN.	MAX.					
Positive Threshold Voltage	V _P	-	1.65	0.6	-	1.4	0.6	1.4	V				
			1.8	0.7	-	1.5	0.7	1.5					
			2.3	1.0	-	1.8	1.0	1.8					
			3.0	1.3	-	2.2	1.3	2.2					
			4.5	1.9	-	3.1	1.9	3.1					
			5.5	2.2	-	3.6	2.2	3.6					
Negative Threshold Voltage	V _N	-	1.65	0.2	0.5	0.8	0.2	0.8	V				
			1.8	0.25	0.56	0.9	0.25	0.9					
			2.3	0.40	0.75	1.15	0.40	1.15					
			3.0	0.6	0.98	1.5	0.6	1.5					
			4.5	1.0	1.42	2.0	1.0	2.0					
			5.5	1.2	1.68	2.3	1.2	2.3					
Hysteresis Voltage	V _H	-	1.65	0.1	0.48	0.9	0.1	0.9	V				
			1.8	0.15	0.51	1.0	0.15	1.0					
			2.3	0.25	0.62	1.1	0.25	1.1					
			3.0	0.4	0.76	1.2	0.4	1.2					
			4.5	0.6	1.01	1.5	0.6	1.5					
			5.5	0.7	1.20	1.7	0.7	1.7					
Output Voltage	High Level	V _{OH}	V _{IN} =V _{IL}	I _{OH} =-100 μA	1.65	1.55	1.65	-	1.55	V			
					1.8	1.7	1.8	-	1.7				
					2.3	2.2	2.3	-	2.2				
					3.0	2.9	3.0	-	2.9				
					4.5	4.4	4.5	-	4.4				
	Low Level	V _{OL}	V _{IN} =V _{IH}	I _{OL} =100 μA	I _{OH} =-4mA	1.65	1.29	1.52	-	1.29	V		
					I _{OH} =-8mA	2.3	1.9	2.14	-	1.9			
					I _{OH} =-16mA	3.0	2.4	2.75	-	2.4			
					I _{OH} =-24mA	3.0	2.3	2.62	-	2.3			
					I _{OH} =-32mA	4.5	3.8	4.13	-	3.8			
					I _{OL} =4mA	1.65	-	0.0	0.1	-	V		
					I _{OL} =8mA	1.8	-	0.0	0.1	-			
					I _{OL} =16mA	2.3	-	0.0	0.1	-			
					I _{OL} =24mA	3.0	-	0.0	0.1	-			
					I _{OL} =32mA	4.5	-	0.0	0.1	-			
					I _{OL} =4mA	1.65	-	0.08	0.24	-	V		
					I _{OL} =8mA	2.3	-	0.10	0.3	-			
					I _{OL} =16mA	3.0	-	0.16	0.4	-			
					I _{OL} =24mA	3.0	-	0.24	0.55	-			
					I _{OL} =32mA	4.5	-	0.25	0.55	-			
Input Leakage Current		I _{IN}	V _{IN} =5.5V or GND		0~5.5	-	-	±0.1	-	±10	μA		
Power Off Leakage Current		I _{OFF}	V _{IN} or V _{OUT} =5.5V		0.0	-	-	1	-	10	μA		
Quiescent Supply Current		I _{CC}	V _{IN} =5.5V or GND		1.65~5.5	-	-	1.0	-	10	μA		

KIC7WZ14FK

ELECTRICAL CHARACTERISTICS


AC Characteristics

CHARACTERISTIC	SYMBOL	TEST CONDITION		Ta=25 °C			Ta=−40~85 °C		UNIT
			V _{CC} (V)	MIN.	TYP.	MAX.	MIN.	MAX.	
Propagation Delay	t_{PLH} t_{PHL}	$C_L=15\text{pF}$, $R_L=1\text{M}\Omega$	1.65	2.5	7.6	13.1	2.5	14.5	ns
			1.8	2.5	6.3	10.9	2.5	12	
			2.5 ± 0.2	1.8	4.3	7.4	1.8	8.1	
			3.3 ± 0.3	1.5	3.3	5.0	1.5	5.5	
			5.0 ± 0.5	1.0	2.7	4.1	1.0	4.5	
Propagation Delay	t_{PLH} t_{PHL}	$C_L=50\text{pF}$, $R_L=500\Omega$	3.3 ± 0.3	1.8	4.0	6.0	1.8	6.6	ns
			5.0 ± 0.5	1.2	3.2	4.9	1.2	5.4	
Input Capacitance	C_{IN}	-	0	-	2.5	-	-	-	pF
Power Dissipation Capacitance	C_{PD}	(Note)	3.3	-	11	-	-	-	pF
			5.5	-	12.5	-	-	-	

Note : C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption (I_{CCD}) at no output loading and operating at 50% duty cycle. (See Figure2.) C_{PD} is related to I_{CCD} dynamic operating current by the expression : $I_{CC(\text{opr})} = C_{PD} \cdot V_{CC} \cdot f_{IN} + (I_{CC\text{static}})$


(I_{CCD}) at no output loading and operating at 50% duty cycle. (See Figure2.) C_{PD} is related to I_{CCD} dynamic operating current by the expression : $I_{CC(\text{opr})} = C_{PD} \cdot V_{CC} \cdot f_{IN} + (I_{CC\text{static}})$

AC Loading and Waveforms

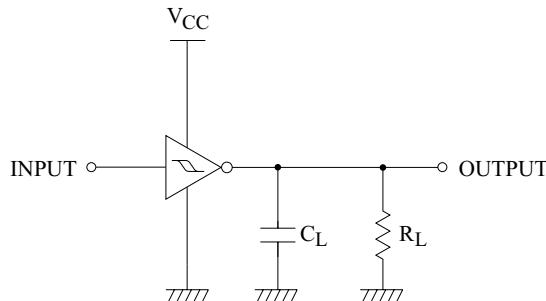

C_L includes load and stray capacitance
Input PRR=1.0MHz ; $t_w=500\text{ns}$

FIGURE 1. AC Test Circuit

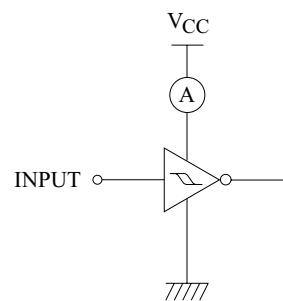

Input=AC Waveform ; $t_r=t_f=1.8\text{ns}$
PRR=variable ; Duty Cycle=50%

FIGURE 2. ICCD Test Circuit

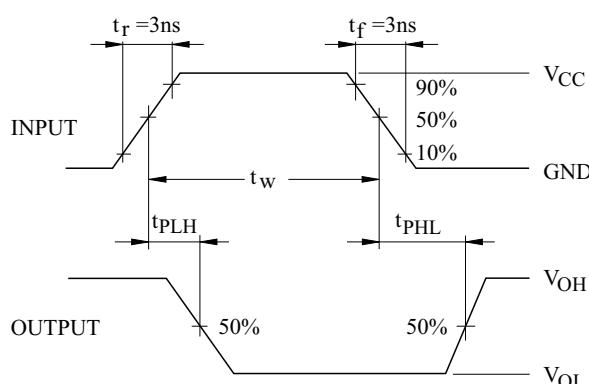


FIGURE 3. AC Waveforms