


**NEW**  
**CMPZ4099  
 THRU  
 CMPZ4124**

**LOW NOISE ZENER DIODE  
 6.8 VOLTS THRU 43 VOLTS  
 350mW, 5% TOLERANCE**

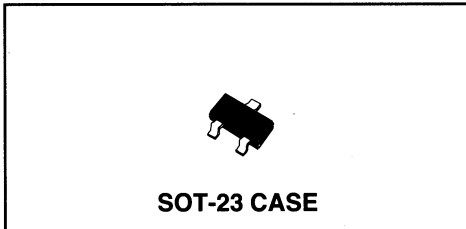

**Central™  
 Semiconductor Corp.**

**DESCRIPTION**

The CENTRAL SEMICONDUCTOR CMPZ4099 Series types are high quality Silicon Zener Diodes designed for low leakage, low current and low noise applications.

**NOTE:** For lower voltage devices, see CMPZ4614 series.

**MAXIMUM RATINGS**

Power Dissipation (@ $T_A=25^\circ\text{C}$ )  
 Operating and Storage Temperature

**SYMBOL**

$P_D$  350  
 $T_J, T_{stg}$  -65 to +150

**UNIT**

mW  
 $^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS** ( $T_A=25^\circ\text{C}$ )  $V_F=1.0\text{V MAX @ } I_F=200\text{mA}$  FOR ALL TYPES


TYPE	ZENER VOLTAGE			TEST CURRENT $I_{ZT}$	MAXIMUM ZENER IMPEDENCE $Z_{ZT}@I_{ZT}$	MAX REVERSE LEAKAGE CURRENT $I_R@V_R$		MAXIMUM ZENER CURRENT $I_{ZM}$	MAXIMUM NOISE DENSITY $N_D@I_{ZT}$
	$V_Z@I_{ZT}$					$\mu\text{A}$	$\Omega$		
	MIN	NOM	MAX						
	VOLTS	VOLTS	VOLTS	$\mu\text{A}$	$\Omega$	$\mu\text{A}$	VOLTS	mA	$\mu\text{V}/\sqrt{\text{Hz}}$
CMPZ4099*	6.460	6.8	7.140	250	200	10	5.2	35.0	40
CMPZ4100*	7.125	7.5	7.865	250	200	10	5.7	31.8	40
CMPZ4101*	7.790	8.2	8.610	250	200	1.0	6.3	29.0	40
CMPZ4102*	8.265	8.7	9.135	250	200	1.0	6.7	27.4	40
CMPZ4103*	8.645	9.1	9.555	250	200	1.0	7.0	26.2	40
CMPZ4104*	9.500	10	10.50	250	200	1.0	7.6	24.8	40
CMPZ4105*	10.45	11	11.55	250	200	0.05	8.5	21.6	40
CMPZ4106*	11.40	12	12.60	250	200	0.05	9.2	20.4	40
CMPZ4107*	12.35	13	13.65	250	200	0.05	9.9	19.0	40
CMPZ4108*	13.30	14	14.70	250	200	0.05	10.7	17.5	40
CMPZ4109*	14.25	15	15.75	250	100	0.05	11.4	16.3	40
CMPZ4110*	15.20	16	16.80	250	100	0.05	12.2	15.4	40
CMPZ4111*	16.15	17	17.85	250	100	0.05	13.0	14.5	40
CMPZ4112*	17.10	18	18.90	250	100	0.05	13.7	13.2	40
CMPZ4113*	18.05	19	19.95	250	150	0.05	14.5	12.5	40
CMPZ4114*	19.0	20	21.00	250	150	0.01	15.2	11.9	40
CMPZ4115*	20.90	22	23.10	250	150	0.01	16.8	10.8	40
CMPZ4116*	22.80	24	25.20	250	150	0.01	18.3	9.9	40

\* Available on special order only, please consult factory.

TYPE	ZENER VOLTAGE			TEST CURRENT	MAXIMUM ZENER IMPEDENCE	MAX REVERSE LEAKAGE CURRENT		MAXIMUM ZENER CURRENT	MAXIMUM NOISE DENSITY
	$V_Z @ I_{ZT}$			$I_{ZT}$	$Z_{ZT} @ I_{ZT}$	$I_R @ V_R$		$I_{ZM}$	$N_D @ I_{ZT}$
	MIN	NOM	MAX						
	VOLTS	VOLTS	VOLTS	$\mu A$	$\Omega$	$\mu A$	VOLTS	mA	$\mu V/\text{Hz}$
CMPZ4117*	23.75	25	26.25	250	150	0.01	19.0	9.5	40
CMPZ4118*	25.65	27	28.35	250	150	0.01	20.5	8.8	40
CMPZ4119*	26.60	28	29.40	250	200	0.01	21.3	8.5	40
CMPZ4120*	28.50	30	31.50	250	200	0.01	22.8	7.9	40
CMPZ4121*	31.35	33	34.65	250	200	0.01	25.1	7.2	40
CMPZ4122*	34.20	36	37.80	250	200	0.01	27.4	6.6	40
CMPZ4123*	37.05	39	40.95	250	200	0.01	29.7	6.1	40
CMPZ4124*	40.85	43	45.15	250	250	0.01	32.7	5.5	40

\* Available on special order only, please consult factory.

All dimensions in inches (mm).

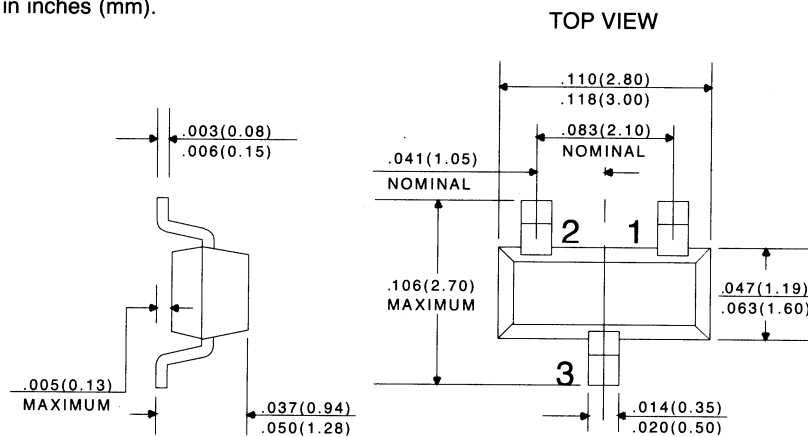

DATA SHEET

LEAD CODE:  
 1) ANODE  
 2) NO CONNECTION  
 3) CATHODE

R2