

## IWD SERIES - DUAL OUTPUT, 10 WATT

### DESCRIPTION

IWD dual output DC/DC converters offer excellent regulation and isolation in an industry-standard package. Available in 5V and 12V input versions, the IWD is perfect for industrial, datacom, or telecom applications. The IWD features short-circuit protection and 500 VDC isolation. Please see the IWS and IAS series for single output applications.



### FEATURES



- Industry Standard Package
- Industry Standard Pinout
- 85°C Case Operation
- Short Circuit Protection
- 5V and 12V Inputs
- Input Pi Filter
- 6-Sided Shielding
- Wide Input Voltage
- 500V Isolation

### TECHNICAL SPECIFICATIONS

Input	
Voltage Range	4.5 - 9 VDC
5 VDC Nominal	9 - 18 VDC
12 VDC Nominal	20% $I_{in}$ Max.
Reflected Ripple	100% $I_{in}$ Max.

Output	
Setpoint Accuracy	±1%
Line Regulation $V_{in}$ Min. - $V_{in}$ Max., $I_{out}$ Rated	±1.0% $V_{out}$
Load Regulation $I_{out}$ Min. - $I_{out}$ Max., $V_{in}$ Nom.	±1.0% $V_{out}$
Minimum Output Current	10% $I_{out}$ Rated
Dynamic Regulation, Loadstep	25% $I_{out}$
Pk Deviation	1% $V_{out}$
Settling Time	500 $\mu$ s
Temperature Coefficient	0.02%/°C
Ripple and Noise, 20 MHz BW	1% $V_{out}$ nom.
Short Circuit Protection <sup>1</sup>	Hiccup
Current Limit	130%

General	
Switching Frequency	300 kHz
Isolation	500 VDC
Input - Output	10 <sup>9</sup> Ohms
Isolation Resistance - Input to Output	-25 to +85°C
Standard Case Operating Range	Storage Range
	-40 to +125°C
Humidity Max., Non-Condensing	95%
Vibration, 3 Axes, 5 min each	5 g, 10 - 55 Hz
Safety	UL, cUL, TUV
Weight (approx.)	1.4 oz

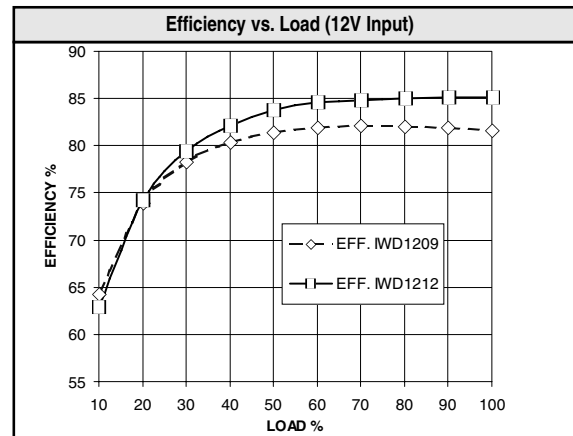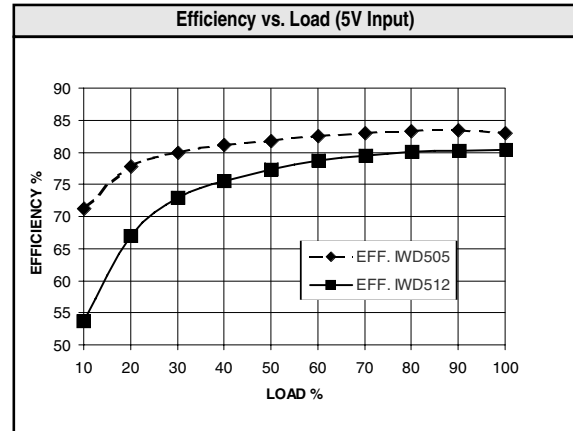

Notes
<sup>1</sup> Converter will auto-restart once fault has been removed.
Specifications typically at 25°C, normal line, and full load, unless otherwise stated.
Soldering Conditions: I/O pins, 260°C, ten seconds; fully compatible with commercial wave-soldering equipment.
Safety: Agency approvals may vary from model to model. Please consult factory for specific model information.


## IWD SERIES - DUAL OUTPUT, 10 WATT

MODELS - (See the last page of section for options.)

MODEL	INPUT VOLTAGE (VOLTS)	INPUT VOLTAGE RANGE (VOLTS)	MAXIMUM INPUT CURRENT (AMPS)*	OUTPUT VOLTAGE (VOLTS)	RATED OUTPUT CURRENT (AMPS)	RIPPLE & NOISE pk-pk (mV)	TYPICAL EFFICIENCY**
<b>IWD505</b>	5	4.65 - 5.50	3.20	±5	±1.000	50	82%
<b>IWD512</b>	5	4.65 - 5.50	3.20	±12	±0.500	120	80%
<b>IWD515</b>	5	4.65 - 5.50	3.20	±15	±0.375	150	82%
<b>IWD1205</b>	12	10.90 - 13.20	1.55	±5	±1.000	50	80%
<b>IWD1212</b>	12	10.90 - 13.20	1.55	±12	±0.500	120	84%
<b>IWD1215</b>	12	10.90 - 13.20	1.55	±15	±0.375	150	82%

NOTES: \* Maximum input current at minimum input voltage, maximum rated output power.  
 \*\* At nominal  $V_{in}$ , rated output.

### MECHANICAL DRAWING

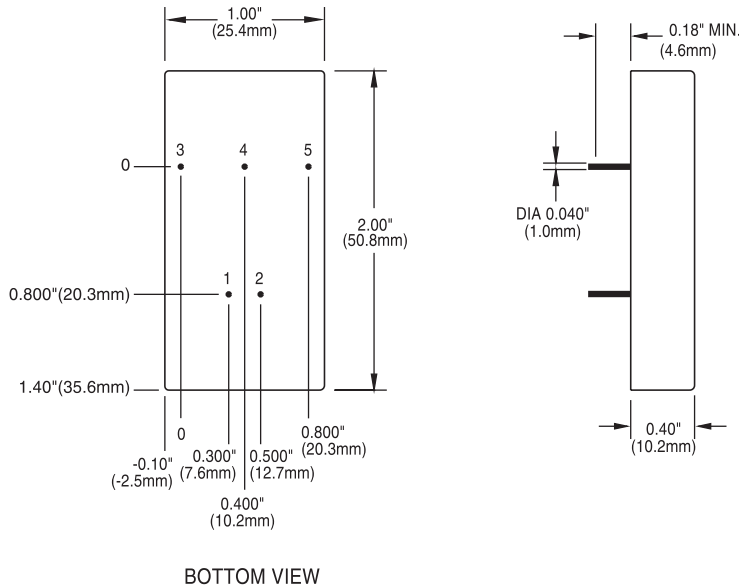

BOTTOM VIEW

Thermal Impedance	
Natural convection	15.4 °C/W
100 LFM	12.2 °C/W
200 LFM	9.3 °C/W
300 LFM	7.4 °C/W
400 LFM	6.4 °C/W

Note:  
 Thermal impedance data is dependent on many environmental factors. The exact thermal performance should be validated for specific application.

Pin	Function
1	+V <sub>in</sub>
2	-V <sub>in</sub>
3	+V <sub>out</sub>
4	Common
5	-V <sub>out</sub>

Tolerances	
Inches:	(Millimeters)
.XX ± 0.040	.X ± 1.0
.XXX ± .010	.XX ± 0.25
Pin:	
± 0.002	± 0.05
Case:	
+ 0.04, - 0.00	+ 1.0, - 0.0
(Tolerances as listed unless otherwise specified.)	

## OPTIONS

When ordering equipment options, use the following suffix information. Select the option(s) that you prefer and add them to the model number. Example ordering options are located below the options table.

OPTION	SUFFIX	APPLICABLE SERIES	REMARKS
Negative Logic	N	HAS, HBD, HBS, HES, HLS, LES, QBS, QES, QLS, TES, TQD	TTL "Low" Turns Module ON TTL "High" Turns Module OFF
Lucent-Compatible Trim	T	HAS, HBD, HBS, HES, HLS, QBS, QES, QLS	
Terminal Strip	TS	XWS, XWD, XWT	
Trim	1	IAS, LES	
Enable	2	IAD, IAS, LES, SMS	
Trim and Enable	3	IAS, LES	
Current Share	4	SMS	
Headerless	Y	Encapsulated EWS, IWS, OWS	
<b>PIN LENGTH AND HEATSINK OPTIONS</b>			Standard Pin Length is 0.180" (4.6mm)
0.110" (2.8mm) Pin Length	8	All Units (Except SMS)	
0.150" (3.8mm) Pin Length	9	All Units (Except SMS)	
0.24" (6.1mm) Horizontal Heatsink	1H	All Units (Except DIP, HLS, HLD, QLS, SIP, SM, TLD, and TKD Packages)	Includes Thermal Pad
0.24" (6.1mm) Vertical Heatsink	1V	All Units (Except DIP, HLS, HLD, QLS, SIP, SM, TLD, and TKD Packages)	Includes Thermal Pad
0.45" (11.4mm) Horizontal Heatsink	2H	All Units (Except DIP, HLS, HLD, QLS, SIP, SM, TLD, and TKD Packages)	Includes Thermal Pad
0.45" (11.4mm) Vertical Heatsink	2V	All Units (Except DIP, HLS, HLD, QLS, SIP, SM, TLD, and TKD Packages)	Includes Thermal Pad
0.95" (24.1mm) Horizontal Heatsink	3H	All Units (Except DIP, HLS, HLD, QLS, SIP, SM, TLD, and TKD Packages)	Includes Thermal Pad
0.95" (24.1mm) Vertical Heatsink	3V	All Units (Except DIP, HLS, HLD, QLS, SIP, SM, TLD, and TKD Packages)	Includes Thermal Pad

Example Options:

HBS050ZG-ANT3V = HBS050ZG-A with negative logic, Lucent-compatible trim, and 0.95" vertical heatsink.

LES015YJ-3N = LES015YJ with optional trim and enable, negative logic.

QBS066ZG-AT8 = QBS066ZG-A with Lucent compatible trim and 0.110" pin length.

---

**NUCLEAR AND MEDICAL APPLICATIONS** Power-One products are not authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the President of Power-One, Inc.

**TECHNICAL REVISIONS** The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

---

**For the Most Up-To-Date Information**

**[www.power-one.com](http://www.power-one.com)**

**24 Hours/Day—7 Days/Week**