

HMC401QS16G


Ku-BAND MMIC VCO with DIVIDE-BY-8, 13.2 - 13.5 GHz

Typical Applications

Low noise MMIC VCO w/Divide-by-8 for Ku-Band applications such as:

- Pt to Pt Radios
- Multi-Pt Radios / LMDS
- VSAT

Functional Diagram

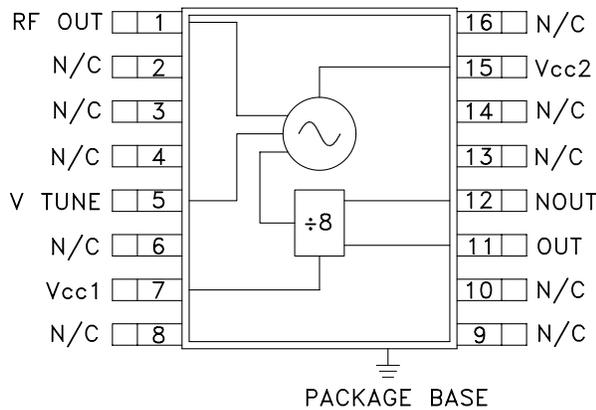

Features

- Pout: -7 dBm
- Phase Noise: -105 dBc/Hz @ 100 KHz Typ.
- No External Resonator Needed
- Single Supply: 5V @ 290 mA
- QSOP16G SMT Package

General Description

The HMC401QS16G is a GaAs InGaP Hetero-junction Bipolar Transistor (HBT) MMIC VCO. The HMC401QS16G integrates a resonator, negative resistance device, varactor diode and divide-by-8 prescaler. The VCO's phase noise performance is excellent over temperature, shock, and process due to the oscillator's monolithic structure. Power output is -7 dBm typical from a 5V supply voltage. The voltage controlled oscillator is packaged in a low cost, surface mount 16 leaded QSOP package with an exposed base for improved RF and thermal performance.


Electrical Specifications, $T_a = +25^\circ C, V_{cc1}, V_{cc2} = +5V$

Parameter	Min.	Typ.	Max.	Units
Frequency Range	13.2 - 13.5			GHz
Power Output	FR Output Divided Output	-10 -9	-7 -6	dBm dBm
SSB Phase Noise @ 100 kHz Offset, $V_{tune} = +5V$ @ RF Output	-105			dBc/Hz
Tune Voltage	V_{tune}	0	10	V
Supply Current	I_{cc1} (Digital) I_{cc2} (RF)		65 225	mA mA
Tune Port Leakage Current ($V_{tune} = 10V$)				10 μA
Output Return Loss				2 dB
Harmonics/Subharmonics	1/2 3/2 2nd 5/2		-7 -28 -17 -40	dBc dBc dBc dBc
Pulling (into a 2.0:1 VSWR)				0.6 MHz pp
Pushing @ $V_{tune} = 5V$				5 MHz/V
Frequency Drift Rate				1.5 MHz/ $^\circ C$


HMC401QS16G

Ku-BAND MMIC VCO with DIVIDE-BY-8, 13.2 - 13.5 GHz


Frequency vs. Tuning Voltage, T= 25°C

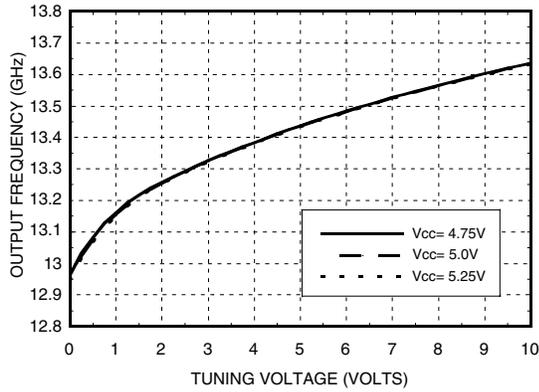


Frequency vs. Tuning Voltage, Vcc= +5V

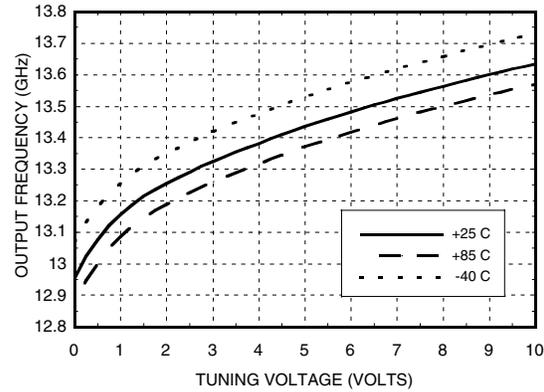


Sensitivity vs. Tuning Voltage, Vcc= +5V

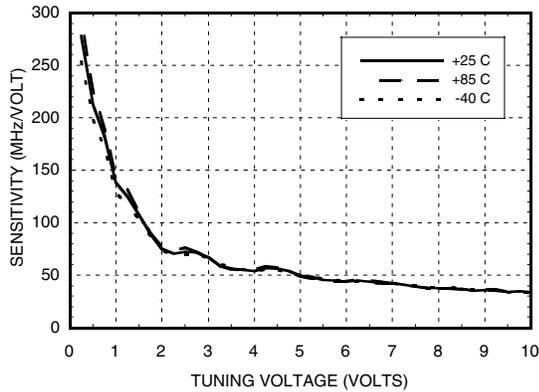


Output Power vs. Tuning Voltage, Vcc= +5V

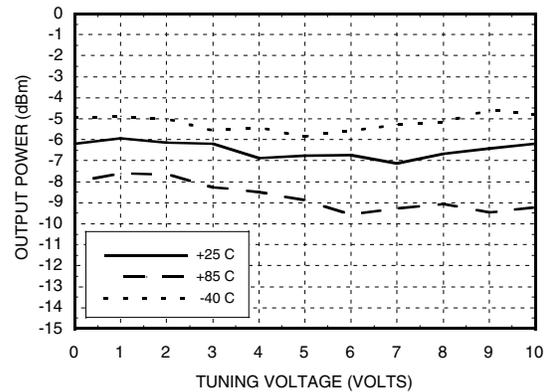

SSB Phase Noise vs. Tuning Voltage

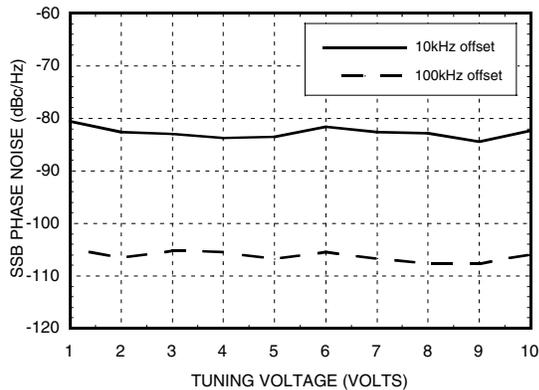


Phase Noise @ Vtune= 5V

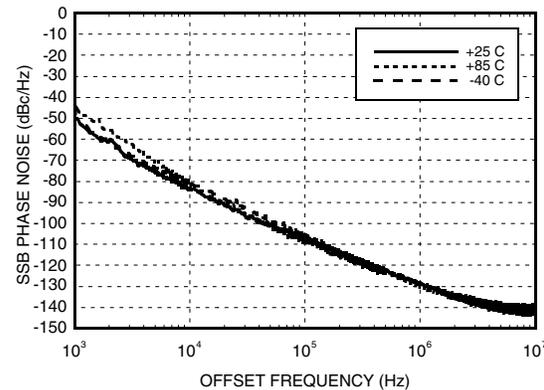


HMC401QS16G

Ku-BAND MMIC VCO with DIVIDE-BY-8, 13.2 - 13.5 GHz


**Divided Frequency
vs. Tuning Voltage, Vcc= +5V**

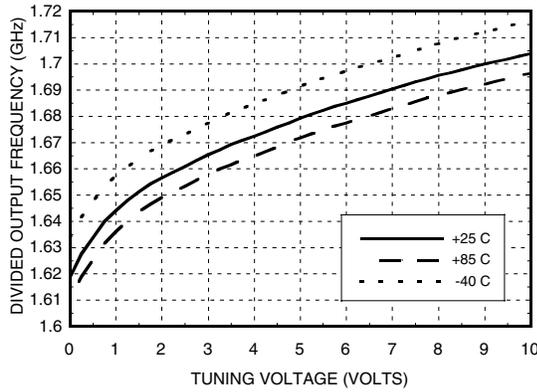

**Divided Output
Power vs. Tuning Voltage, Vcc= +5V**

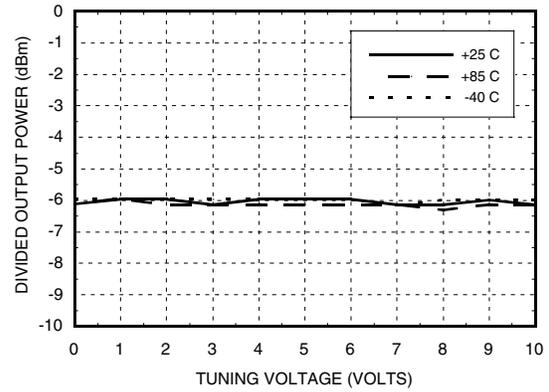

**Divided Output
SSB Phase Noise @ Vtune= 5V**

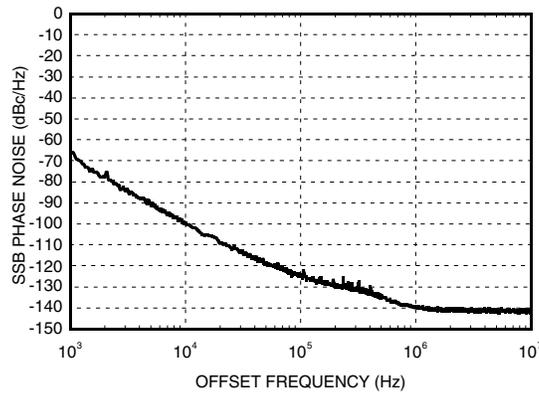

Ku-BAND MMIC VCO with DIVIDE-BY-8, 13.2 - 13.5 GHz

Absolute Maximum Ratings


Vcc1, Vcc2	5.5 V
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C
Vtune	0 to 11V Max.

Typical Supply Current vs. Vcc

Vcc (V)	Icc (mA)
4.75	260
5.0	290
5.25	315

Note: VCO will operate over full voltage range shown above.

Outline Drawing





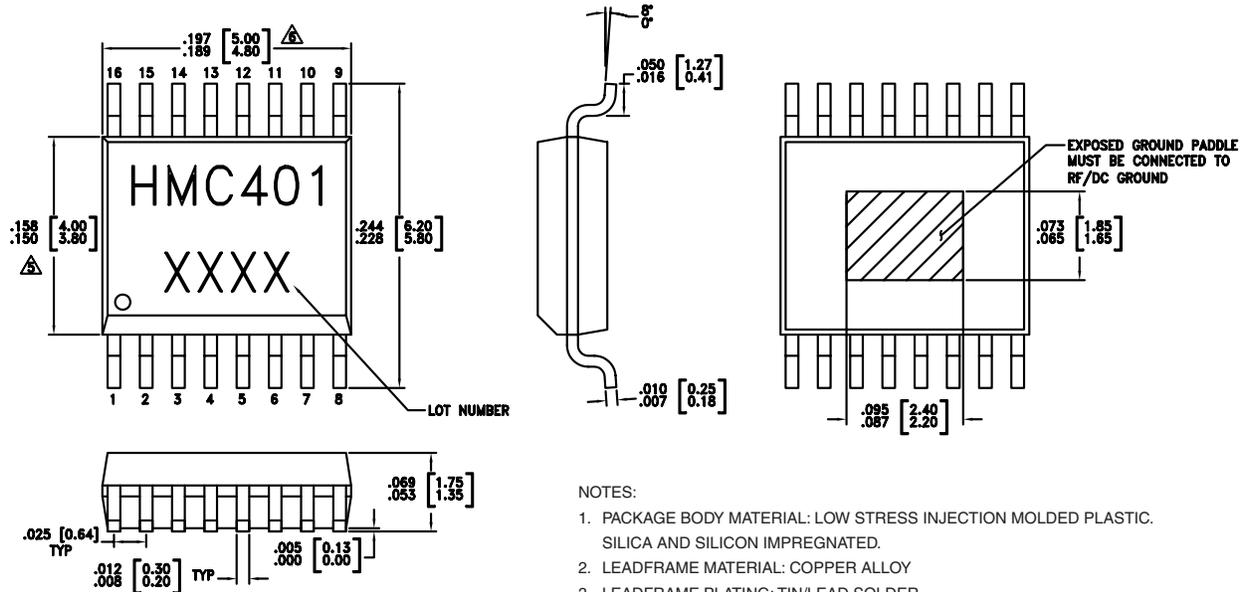


NOTES:

1. PACKAGE BODY MATERIAL: LOW STRESS INJECTION MOLDED PLASTIC. SILICA AND SILICON IMPREGNATED.
2. LEADFRAME MATERIAL: COPPER ALLOY
3. LEADFRAME PLATING: TIN/LEAD SOLDER
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].
- △ DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.15 mm PER SIDE.
- △ DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.25 mm PER SIDE.
7. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF & DC GROUND.

Ku-BAND MMIC VCO with DIVIDE-BY-8, 13.2 - 13.5 GHz


Pin Descriptions

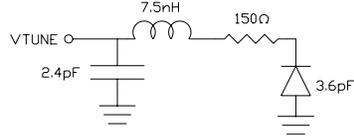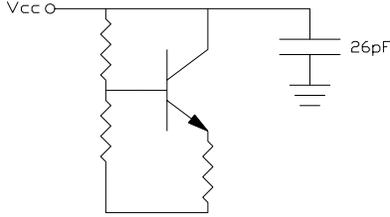Pin Number	Function	Description	Interface Schematic
1	RF OUT	RF output (AC coupled).	
2, 3, 4, 6, 8, 9, 10, 13, 14, 16	N/C	No Connection	
5	VTUNE	Control Voltage Input. Modulation port bandwidth dependent on drive source impedance.	
7, 15	VCC1, VCC2	Supply Voltage, 5V	
11	OUT	Divided Output	
12	NOUT	Divided Output 180° output phase with pin 11.	
	GND	Package bottom has an exposed metal paddle that must be RF & DC grounded.	

15

VCOS - SMT

Evaluation PCB

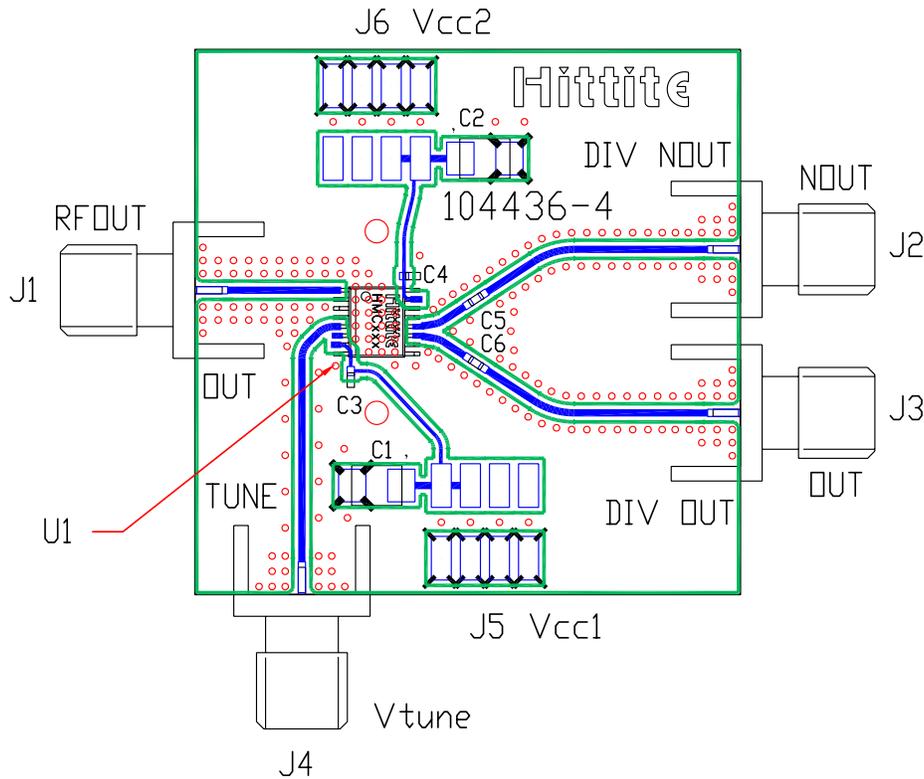


List of Materials

Item	Description
J1 - J4	PC Mount SMA RF Connector
J5 - J6	2 mm DC Header
C1 - C2	10 μ F Tantalum Capacitor
C3 - C6	1,000 pF Capacitor 0402 Pkg.
U1	HMC401QS16G VCO
PCB*	104436 Eval Board
* Circuit Board Material: Rogers 4350	

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and backside ground slug should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.

Ku-BAND MMIC VCO with DIVIDE-BY-8, 13.2 - 13.5 GHz

Typical Application Circuit

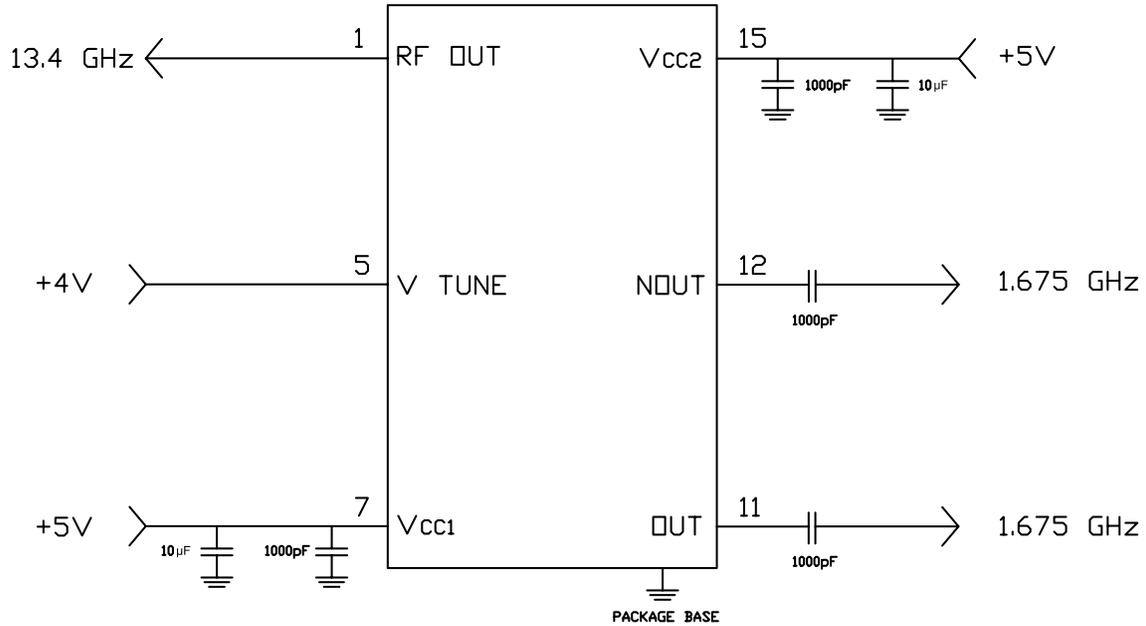

15

VCOS - SMT

HMC401QS16G

*Ku-BAND MMIC VCO with
DIVIDE-BY-8, 13.2 - 13.5 GHz*

Notes: