

Monolithic crystal filter

MQF75.0-3600/03



Application

- 6 pol filter
- i.f.- filter
- use in mobile and stationary transceivers

Limiting values

		Unit	Value
Center frequency	f_0	MHz	75.0
Insertion loss		dB	≤ 6.0
Pass band at 6.0 dB		kHz	± 18.00
Ripple in pass band	$f_0 \pm 12.00$ kHz	dB	≤ 2.0
Stop band attenuation	$f_0 \pm 100$ kHz	dB	≥ 60
	$f_0 \pm 200$ kHz	dB	> 80 except spurious
Alternate attenuation	$f_0 \pm 500$ kHz	dB	> 70 except spurious


Terminating impedance Z

R1 C1	Ohm/pF	50 0
R2 C2	Ohm/pF	50 0


Operating temp. range	$^{\circ}\text{C}$	-20... +85
-----------------------	--------------------	------------

Characteristics MQF75.0-3600/03


Pass band

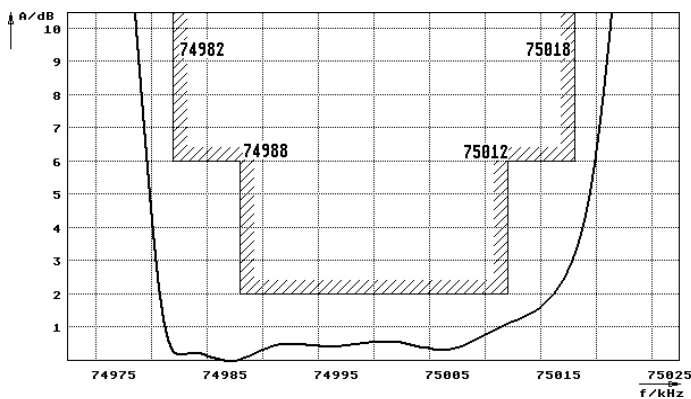

Stop band

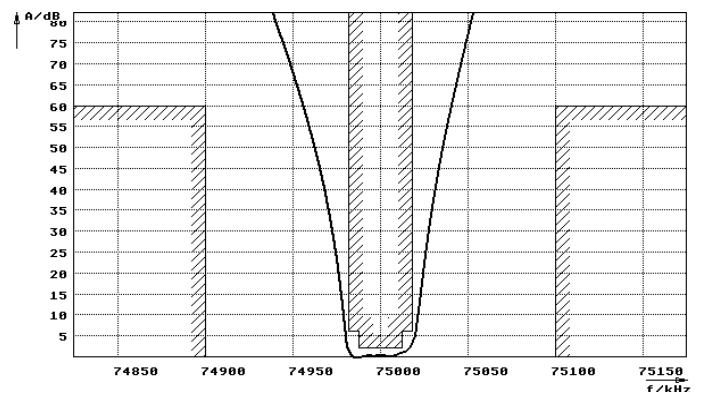

Pin connections: 1 Input
2 Input-E
3 Output
4 Output-E

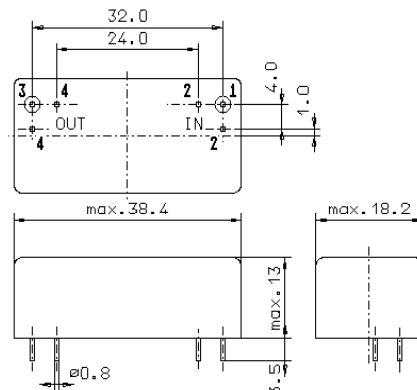

GM17