

Precision Micropower Shunt Voltage Reference

■GENERAL DESCRIPTION


NJM2825 is a precision and low quiescent current shunt voltage reference.

Reference voltage form bandgap circuit has guaranteed the high accuracy of the $\pm 0.5\%$ with trimming. In addition the temperature drift of $10\text{ppm}/^\circ\text{C}$ typ. was actualized by the temperature compensating circuit. The reference voltage circuit operates by consumed low quiescent current of the $0.7\mu\text{A}$ for low power technology.

The Output capacitor is unnecessary by the phase compensating circuit which is built in. Tolerates capacitive loads, it is easy to use for application.

It is suitable for data converters, instrumentation, and other applications where precision reference is required.

■PACKAGE OUTLINE



NJM2825F

■FEATURES

- Precision Reference Voltage $1,200\text{mV}\pm 0.5\%$
- Low temperature coefficient $10\text{ppm}/^\circ\text{C}$ typ.
- Low Quiescent Current $0.7\mu\text{A}$ max.
- No Output Capacitor Required
- Tolerates Capacitive Loads
- Bipolar Technology
- Package Outline NJM2825F : SOT-23-5 (MTP5)

■PRODUCT VARIATION


NJM2825

$\pm 0.5\%, I_{\text{MIN}}=0.7\mu\text{A}$


NJM2823

$\pm 0.4\%, I_{\text{MIN}}=60\mu\text{A}$

■BLOCK DIAGRAM

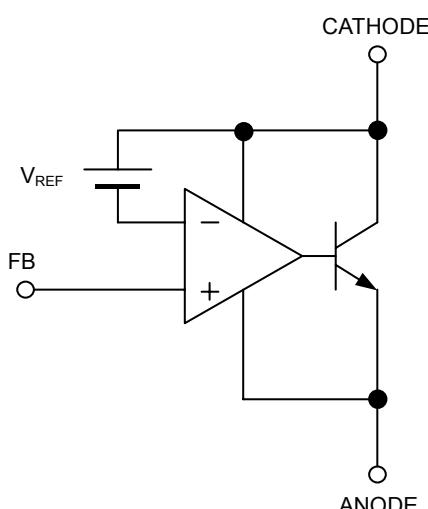

■PIN CONFIGURATION

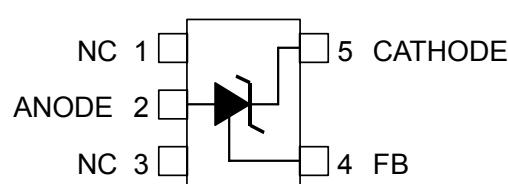

NJM2825F

NJM2825

■ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

| PARAMETER | SYMBOL | MAXIMUM RATINGS | UNIT |
|-------------------------------|------------------|-----------------|------|
| Cathode Voltage | V _{KA} | 14 | V |
| Cathode Current | I _K | 20 | mA |
| Cathode-Anode Reverse Current | -I _K | 10 | mA |
| Power Dissipation | P _D | 200 | mW |
| Operating Temperature Range | T _{OPR} | -40 ~ +85 | °C |
| Storage Temperature Range | T _{STG} | -40 ~ +125 | °C |

■RECOMMENDED OPERATING CONDITIONS (Ta=25°C)

| PARAMETER | SYMBOL | MIN. | TYP. | MAX. | UNIT |
|-----------------|-----------------|------------------|------|------|------|
| Cathode Voltage | V _{KA} | V _{REF} | — | 13 | V |
| Cathode Current | I _K | 0.7μ | — | 12 | mA |

■ELECTRICAL CHARACTERISTICS (I_K=0.8μA,Ta=25°C)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---|---|--|--------|--------|--------|------|
| Reference Voltage | V _{REF} | V _{FB} =V _A (*1) | 1194.0 | 1200.0 | 1206.0 | mV |
| Load Regulation | ΔV _{REF} / ΔI _K | V _{FB} =V _A , I _{MIN} ≤ I _K ≤ 200μA (*1) | — | 0.2 | 0.7 | mV |
| | | V _{FB} =V _A , 200μA≤ I _K ≤ 2mA (*1) | — | 0.7 | 2 | mV |
| | | V _{FB} =V _A , 2mA≤ I _K ≤ 12mA (*1) | — | 3.4 | 10 | mV |
| Reference Voltage Change vs. Cathode Voltage Change | ΔV _{REF} / ΔV _{KA} | V _{REF} ≤ V _{KA} ≤ 13V, I _K =2μA R1=120kΩ, R2=val (Note 1) (*2) | — | -1 | -2 | mV/V |
| Minimum Operating Current | I _{MIN} | V _{REF} ≤ V _{KA} ≤ 5V (*2) 5V≤ V _{KA} ≤ 13V (*2) | — | 0.3 | 0.7 | μA |
| Feedback Current | I _{FB} | R1=∞, R2=120kΩ (*2) | — | 0.3 | 1 | nA |
| Dynamic Impedance | Z _{KA} | V _{FB} =V _A , I _K =0.7μA~12mA (*1) | — | 0.4 | 1.1 | Ω |

■TEMPERATURE CHARACTERISTICS (I_K=0.8μA, Ta= -40°C ~ 85°C)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---|---------------------|--------------------------------------|--------|-----------|-----------|--------------|
| Reference Voltage Change (Note 2) | ΔV _{REF_T} | V _{FB} =V _A (*1) | — | 0.8 10 | 2.3 30 | mV ppm/°C |
| Reference Voltage (Note 2) | V _{REF_T} | V _{FB} =V _A (*1) | 1191.7 | 1200.0 | 1208.3 | mV |
| Feedback Current Change | I _{FB_T} | R1=∞, R2=120kΩ (*2) | — | 0.4 | — | nA |

Note 1: |V_{REF}| …Reference voltage includes error.

Note 2: Reference Voltage Change is defined as

$$\Delta V_{REF_T} [\text{mV}] = \pm <\text{Reference Voltage Change [ppm/°C]}> \times <-40^\circ\text{C} \sim 25^\circ\text{C}> \times V_{REF}$$

The maximum value of “Reference Voltage Change” is determined based on sampling evaluation from the 5 initial production lots, and thus not tested in the production test. Therefore, these values are for the reference design purpose only.

(*1): Test Circuit (Fig.1)

(*2): Test Circuit (Fig.2)

■TEST CIRCUIT

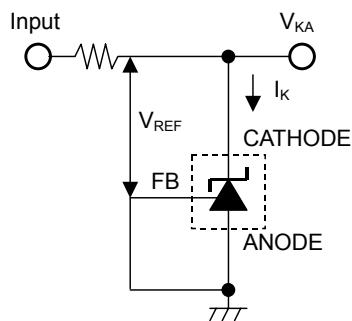


Fig.1 $V_{KA}=V_{REF}$ to test circuit

$$V_{FB}=V_A$$





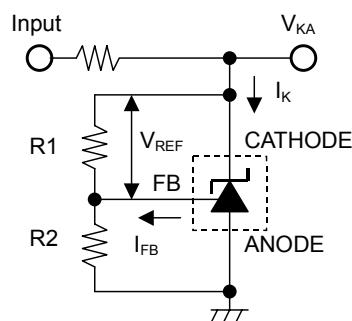





Fig.2 $V_{KA} > V_{REF}$ to test circuit

$$V_{KA} = V_{REF} \left(1 + \frac{R_2}{R_1} \right) + I_{FB} \times R_2$$


■TYPICAL CHARACTERISTICS

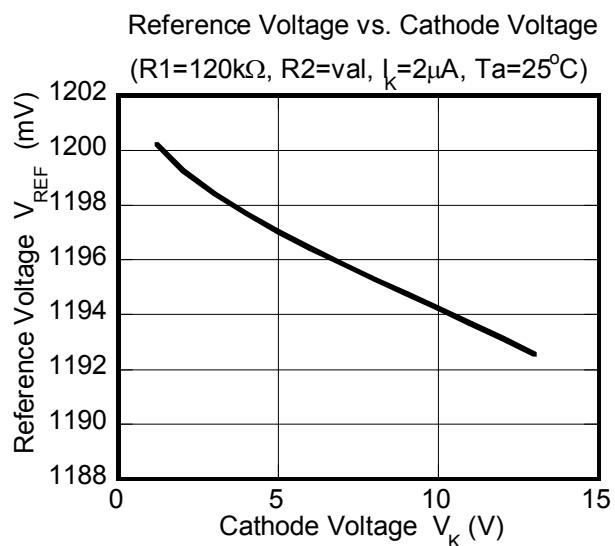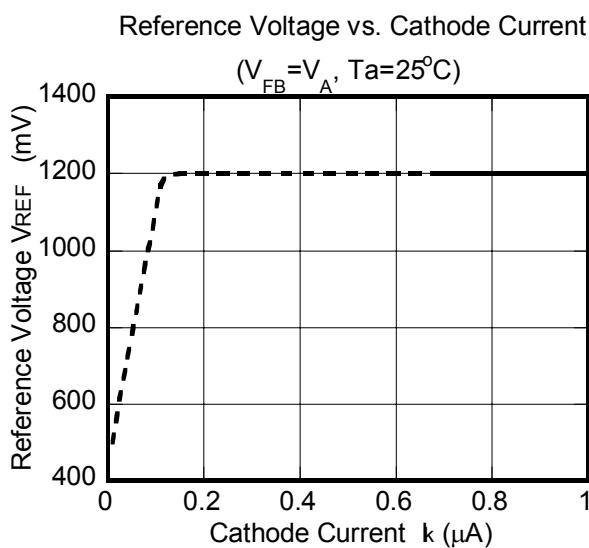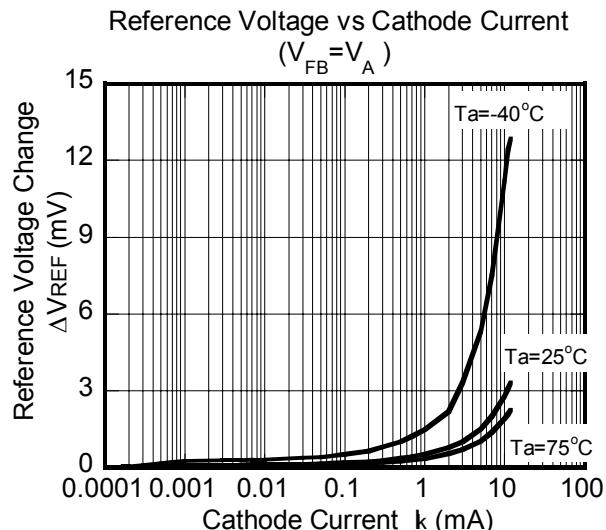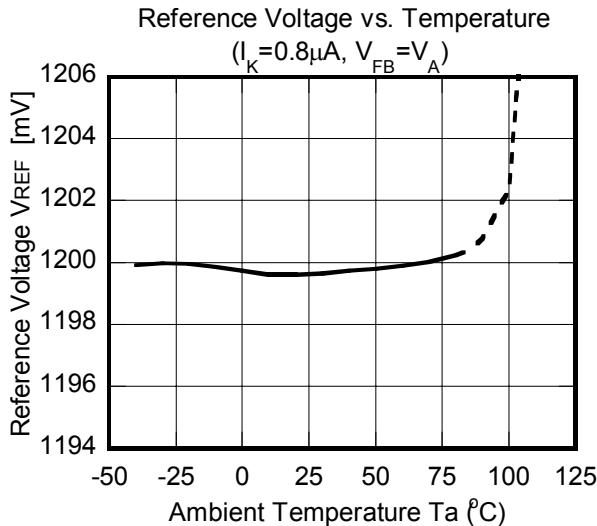

■TYPICAL CHARACTERISTICS

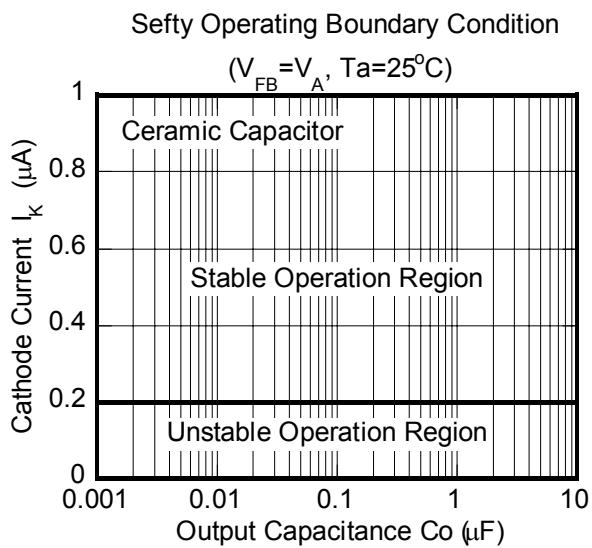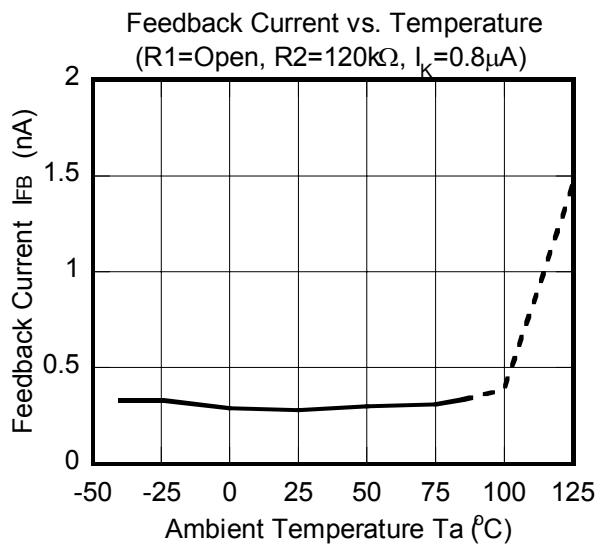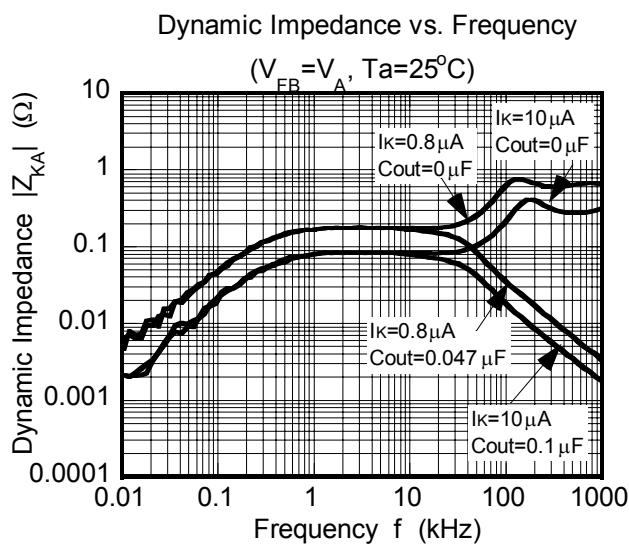

Note) Oscillation might occur while operating within the range of safety curve.
So that, it is necessary to make ample margins by taking considerations of fluctuation of the device.

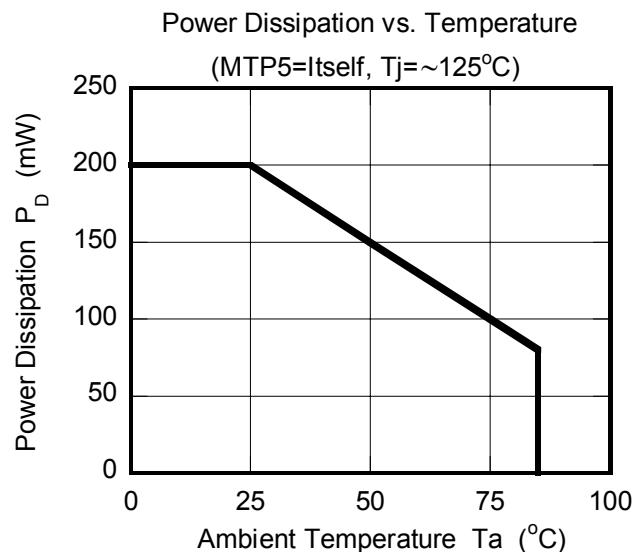

MEMO

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.