

16-bit Proprietary Microcontroller

CMOS

F²MC-16LX MB90820 Series

MB90822/823/F822A/F823A/V820

■ DESCRIPTION

The MB90820 series is a line of general-purpose, Fujitsu 16-bit microcontrollers designed for process control applications which require high-speed real-time processing, such as consumer products.

While inheriting the AT architecture of the F²MC* family, the instruction set for the F²MC-16LX CPU core of the MB90820 series incorporates additional instructions for high-level languages, supports extended addressing modes, and contains enhanced multiplication and division instructions as well as a substantial collection of improved bit manipulation instructions. In addition, the MB90820 series has an on-chip 32-bit accumulator which enables processing of long-word data.

The peripheral resources integrated in the MB90820 series include : an 8/10-bit A/D converter, 8-bit D/A converters, UARTs (SCI) 0, 1, multi-functional timer (16-bit free-running timer, input capture units (ICUs) 0 to 3, output compare units (OCUs) 0 to 5, 16-bit PPG timer 0, waveform generator), 16-bit PPG timer 1, 2, PWC 0, 1, 16-bit reload timer 0, 1 and DTP/external interrupt.

*: F²MC stands for FUJITSU Flexible Microcontroller, a registered trademark of FUJITSU LIMITED.


■ FEATURES

- Minimum execution time of instruction : 42 ns / 4 MHz oscillation (uses PLL clock multiplication) maximum multiplier = 6
- Maximum memory space
16M bytes
Linear/bank access

(Continued)


■ PACKAGES

80-pin plastic QFP

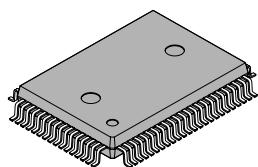


(FPT-80P-M06)

80-pin plastic LQFP

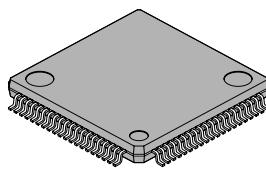

(FPT-80P-M05)

80-pin plastic LQFP

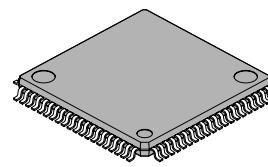

(FPT-80P-M11)

MB90820 Series

(Continued)

- Instruction set optimized for controller applications
 - Supported data types : bit, byte, word, and long-word types
 - Standard addressing modes : 23 types
 - 32-bit accumulator enhancing high-precision operations
 - Enhanced multiplication/division and RETI instructions
- Enhanced high level language (C) and multi-tasking support instructions
 - Use of a system stack pointer
 - Symmetrical instruction set and barrel shift instructions
- Program patch function (for two address pointers)
- Increased execution speed : 4-byte instruction queue
- Powerful interrupt function
 - Up to eight priority levels programmable
 - External interrupt inputs : 8 channels
- Automatic data transmission function independent of CPU operation
 - Up to 16 channels for the extended intelligent I/O service
 - DTP request inputs : 8 channels
- Internal ROM
 - Flash memory : 64K/128K bytes with flash security
 - Mask ROM : 64K/128K bytes
- Internal RAM
 - EVA : 16K bytes
 - Flash memory : 4K bytes
 - Mask ROM : 4K bytes
- General-purpose ports
 - Up to 66 channels (pull-up resistor settable port for : 32 channels)
- A/D Converter (RC) : 16 channels
 - 8/10-bit resolution selectable
 - Conversion time : Min 3 μ s (24 MHz operation, including sampling time)
- 8-bit D/A Converter : 2 channels
- UART : 2 channels
- 16-bit PPG timer : 3 channels
 - Mode switching function provided (PWM mode or one-shot mode)
 - ch0 can be worked with multi-functional timer or independently
- 16-bit reload timer : 2 channels
- 16-bit PWC timer : 2 channels
- Multi-functional timer
 - Input capture : 4 channels
 - Output compare with selectable buffer : 6 channels
 - Free-running timer with up or up-down mode selection and selectable buffer: 1 channel
 - 16-bit PPG timer : 1 channel
 - Waveform generator : (16-bit timer : 3 channels, 3-phase waveform or dead time)
- Timebase counter/watchdog timer : 18-bit
- Low-power consumption mode :
 - Sleep mode
 - Stop mode
 - CPU intermittent operation mode

(Continued)

(Continued)

- Package :
LQFP-80 (FPT-80P-M05 : 0.50 mm pitch)
LQFP-80 (FPT-80P-M11 : 0.65 mm pitch)
QFP-80 (FPT-80P-M06 : 0.80 mm pitch)
- CMOS technology

MB90820 Series

■ PRODUCT LINEUP

Part number Item	MB90V820	MB90F822A	MB90F823A	MB90822	MB90823				
Classification	Evaluation product	Flash memory product with flash security		Mask ROM product					
ROM size	—	64K bytes	128K bytes	64K bytes	128K bytes				
RAM size	16K bytes	4K bytes							
CPU function	Number of instruction : 351 Minimum execution time : 42 ns / 4 MHz (PLL × 6) Addressing mode : 23 Data bit length : 1, 8, 16 bits Maximum memory space: 16M bytes								
I/O port	I/O port (CMOS) : 66								
PWC	Pulse width counter timer : 2 channels Timer function (select the counter timer from three internal clocks) Various pulse width measuring function ("H" pulse width, "L" pulse width, rising edge to falling edge period, falling edge to rising edge period, rising edge to rising edge period and falling edge to falling edge period)								
UART	UART : 2 channels With full-duplex double buffer (8-bit length) Clock asynchronous or clock synchronized transmission (with start and stop bits) can be selected and used. Transmission can be one-to-one (bidirectional communication) or one-to-n (master-slave communication).								
16-bit reload timer	Reload timer : 2 channels Reload mode, single-shot mode or event count mode selectable								
16-bit PPG timer	PPG timer : 3 channels PWM mode or single-shot mode selectable Ch0 can be worked with multi-functional timer or independently.								
Multi-functional timer (for AC/DC motor control)	16-bit free-running timer with up or up-down mode selection and buffer : 1 channel 16-bit output compare : 6 channels 16-bit input capture : 4 channels 16-bit PPG timer : 1 channel Waveform generator (16-bit timer : 3 channels, 3-phase waveform or dead time)								
8/10-bit A/D converter	8/10-bit resolution (16 channels) Conversion time : Min 3 µs (24 MHz internal clock, including sampling time)								
8-bit D/A converter	8-bit resolution (2 channels)								
DTP/External interrupt	8 independent channels Interrupt factors : Rising edge, falling edge, "L" level or "H" level								
Low-power consumption	Stop mode / Sleep mode / CPU intermittent operation mode								

(Continued)

MB90820 Series

(Continued)

Part number Item	MB90V820	MB90F822A	MB90F823A	MB90822	MB90823
Package	PGA-299	LQFP-80 (FPT-80P-M05 : 0.50 mm pitch) LQFP-80 (FPT-80P-M11 : 0.65 mm pitch) QFP-80 (FPT-80P-M06 : 0.80 mm pitch)			
Power supply voltage for operation* ¹	4.5 V to 5.5 V ^{*1}	3.5 V to 5.5 V : Normal operation when A/D converter and D/A converter are not used 4.0 V to 5.5 V : Normal operation when D/A converter is not used 4.5 V to 5.5 V : Normal operation when A/D converter and D/A converter are used			
Process	CMOS				
Emulator power supply* ²	Included	—			

*1 : MB90V820 is operating guaranteed temperature 0 °C to + 25 °C.

*2 : It is setting of Jumper switch (TOOL VCC) when emulator (MB2147-01) is used.

Please refer to the MB2147-01 or MB2147-20 hardware manual (3.3 Emulator-dedicated Power Supply switching) about details.

■ PACKAGE AND CORRESPONDING PRODUCTS

Package	MB90V820	MB90F822A	MB90F823A	MB90822	MB90823
PGA-299	○	X	X	X	X
FPT-80P-M05	X	○	○	○	○
FPT-80P-M11	X	○	○	○	○
FPT-80P-M06	X	○	○	○	○

○ : Available

X : Not available

Note: For more information about each package, see "■ PACKAGE DIMENSIONS".

MB90820 Series

■ DIFFERENCES AMONG PRODUCTS

Memory Size


In evaluation with an evaluation product, note the difference between the evaluation product and the product actually used. The following items must be taken into consideration.

- The MB90V820 does not have an internal ROM, however, operations equivalent to chips with an internal ROM can be evaluated by using a dedicated development tool, enabling selection of ROM size by settings of the development tool.
- In the MB90V820, images from $FF8000_H$ to $FFFFF_H$ are mapped to bank 00, and $FE0000_H$ to $FF7FFF_H$ are mapped to bank FE and bank FF only. (This setting can be changed by configuring the development tool.)
- In the MB90822/F822A, images from $FF8000_H$ to $FFFFF_H$ are mapped to bank 00, and $FF0000_H$ to $FF7FFF_H$ are mapped to bank FF only. In the MB90823/F823A, images from $FF8000_H$ to $FFFFF_H$ are mapped to bank 00, and $FE0000_H$ to $FF7FFF_H$ are mapped to bank FE and bank FF only.

MB90820 Series

■ PIN ASSIGNMENT

(TOP VIEW)

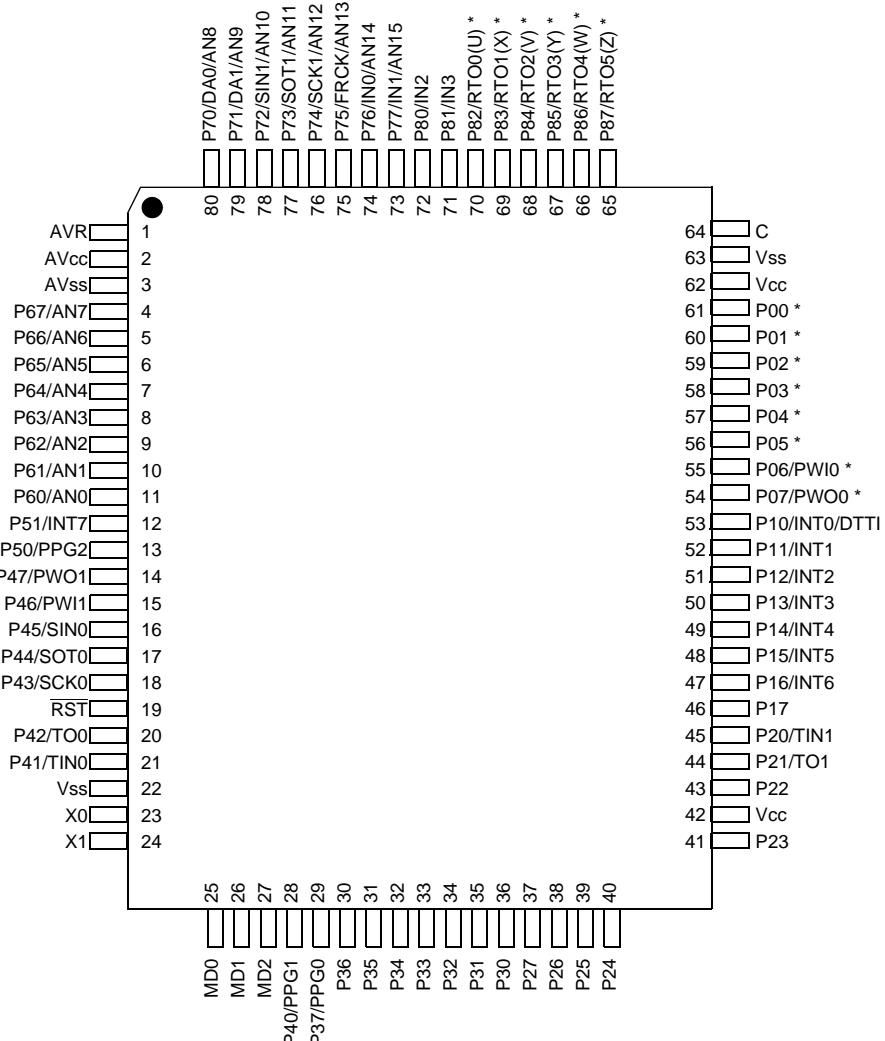


* : High current pin

(Continued)

MB90820 Series

(Continued)

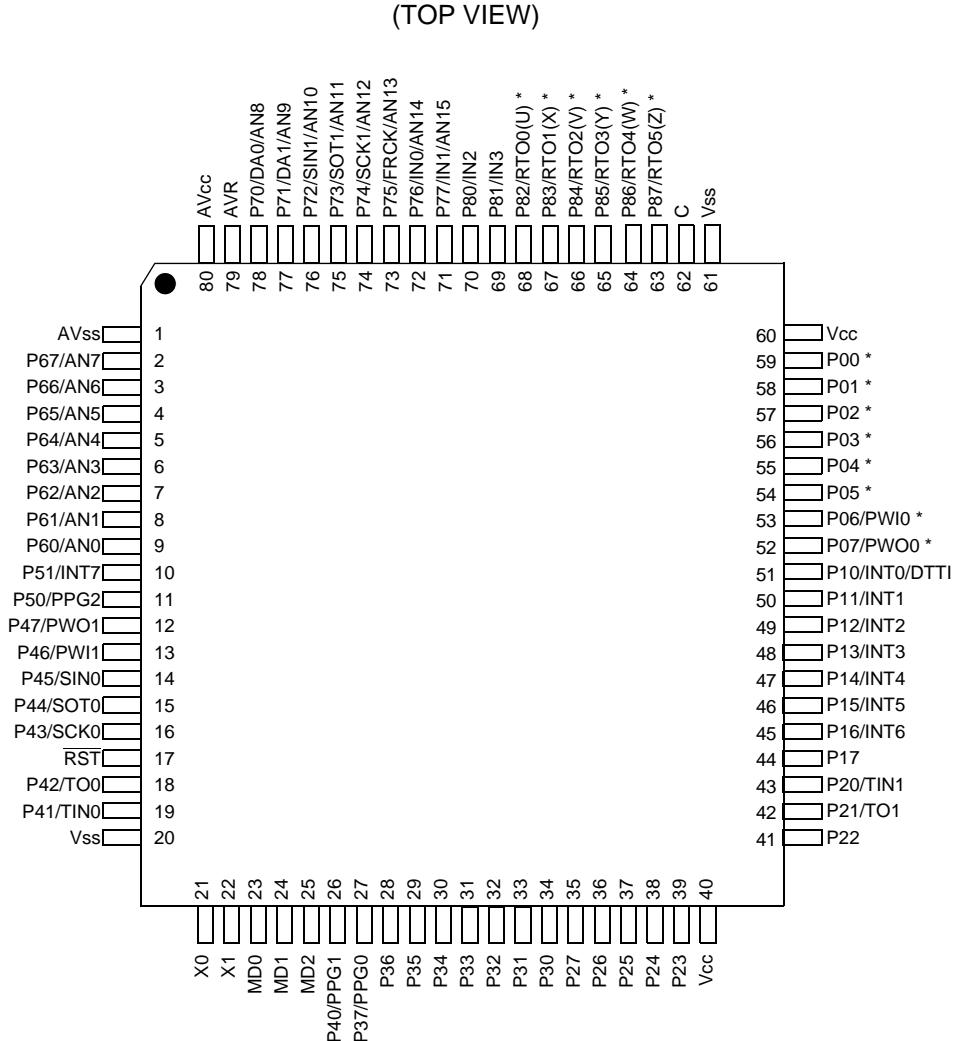

(FPT-80P-M11)
(FPT-80P-M05)

* : High current pin.

■ PIN DESCRIPTION

Pin no.		Pin name	I/O circuit *3	Pin status during reset	Function	
LQFP *1	QFP *2					
21, 22	23, 24	X0,X1	A	Oscillating	Oscillation pins.	
17	19	RST	B	Reset input	External reset input pin.	
59 to 54	61 to 56	P00 to P05	C	Port input	General-purpose I/O ports.	
53	55	P06	C		General-purpose I/O ports.	
		PWI0			PWC ch0 signal input pin.	
52	54	P07	C		General-purpose I/O ports.	
		PWO0			PWC ch0 signal output pin.	
51	53	P10	D		General-purpose I/O ports.	
		INT0			External interrupt request input ch0 pin.	
		DTTI			RTO0 to RTO5 pins for fixed-level input. This function is enabled when the waveform generator specifies its input bits.	
50 to 45	52 to 47	P11 to P16	D		General-purpose I/O ports.	
		INT1 to INT6			External interrupt request input ch1 to ch6 pins.	
44	46	P17	D		General-purpose I/O ports.	
43	45	P20	D		General-purpose I/O ports.	
		TIN1			External clock input pin for reload timer ch1.	
42	44	P21	D		General-purpose I/O ports.	
		TO1			Event output pin for reload timer ch1.	
41, 39 to 35	43, 41 to 37	P22 to P27	D		General-purpose I/O ports.	
34 to 28	36 to 30	P30 to P36	E		General-purpose I/O ports.	
27	29	P37	E		General-purpose I/O ports.	
		PPG0			Output pins for PPG timer ch0.	
26	28	P40	F		General-purpose I/O ports.	
		PPG1			Output pins for PPG timer ch1.	
19	21	P41	F		General-purpose I/O ports.	
		TIN0			External clock input pin for reload timer ch0.	
18	20	P42	F		General-purpose I/O ports.	
		TO0			Event output pin for reload timer ch0.	

*1: FPT-80P-M05, FPT-80P-M11

*2: FPT-80P-M06

*3: See "■ I/O CIRCUIT TYPE".

(Continued)

MB90820 Series

Pin no.		Pin name	I/O circuit *3	Pin status during reset	Function
LQFP *1	QFP *2				
16	18	P43	F	Port Input	General-purpose I/O ports.
		SCK0			Serial clock I/O pin for UART ch0.
15	17	P44			General-purpose I/O ports.
		SOT0			Serial data output pin for UART ch0.
14	16	P45			General-purpose I/O ports.
		SIN0			Serial data input pin for UART ch0.
13	15	P46			General-purpose I/O ports.
		PWI1			PWC ch1 signal input pin.
12	14	P47			General-purpose I/O ports.
		PWO1			PWC ch1 signal output pin.
11	13	P50			General-purpose I/O ports.
		PPG2			Output pins for PPG timer ch2.
10	12	P51			General-purpose I/O ports.
		INT7			External interrupt request input ch7 pin.
9 to 2	11 to 4	P60 to P67	H	Analog input	General-purpose I/O ports.
		AN0 to AN7			A/D converter analog input pins.
78, 77	80, 79	P70, P71			General-purpose I/O ports.
		DA0, DA1			D/A converter analog output pins.
		AN8, AN9			A/D converter analog input pins.
76	78	P72			General-purpose I/O ports.
		SIN1			Serial data input pin for UART ch1.
		AN10			A/D converter analog input pins.
75	77	P73			General-purpose I/O ports.
		SOT1			Serial data output pin for UART ch1.
		AN11			A/D converter analog input pins.
74	76	P74	K	Analog input	General-purpose I/O port.
		SCK1			Serial clock I/O pin for UART ch1.
		AN12			A/D converter analog input pins.
73	75	P75	K	Analog input	General-purpose I/O ports.
		FRCK			External clock input pin for free-running timer.
		AN13			A/D converter analog input pins.

*1: FPT-80P-M05, FPT-80P-M11

*2: FPT-80P-M06

*3: See "■ I/O CIRCUIT TYPE".

(Continued)

(Continued)

Pin no.		Pin name	I/O circuit ^{*3}	Pin status during reset	Function	
LQFP ^{*1}	QFP ^{*2}					
72, 71	74, 73	P76, P77	K	Analog input	General-purpose I/O ports.	
		IN0, IN1			Trigger input pins for input capture ch0, ch1.	
		AN14, AN15			A/D converter analog input pins.	
70, 69	72, 71	P80, P81	F	Port input	General-purpose I/O ports.	
		IN2, IN3			Trigger input pins for input capture ch2, ch3.	
68 to 63	70 to 65	P82 to P87	L		General-purpose I/O ports.	
		RTO0 (U) to RTO5 (Z)			Waveform generator output pins. These pins output the waveforms specified at the waveform generator. Output is generated when waveform generator output is enabled.	
25	27	MD2	M	Mode input	Input pin for operation mode specification.	
24, 23	26, 25	MD1, MD0	N		Input pin for operation mode specification.	
80	2	AVcc	—	—	Analog power supply pin.	
79	1	AVR	—		Vref + pin for the A/D converter. Vref - is fixed to AVss internally.	
1	3	AVss	—		Analog power supply (Ground) pin.	
20, 61	22, 63	Vss	—	—	Power (Ground) pin.	
40, 60	42, 62	Vcc	—		Power pin.	
62	64	C	—	—	Connect pin for smoothing capacitor to stabilize internal power supply.	






*1: FPT-80P-M05, FPT-80P-M11

*2: FPT-80P-M06





*3: See "■ I/O CIRCUIT TYPE".

MB90820 Series

■ I/O CIRCUIT TYPE

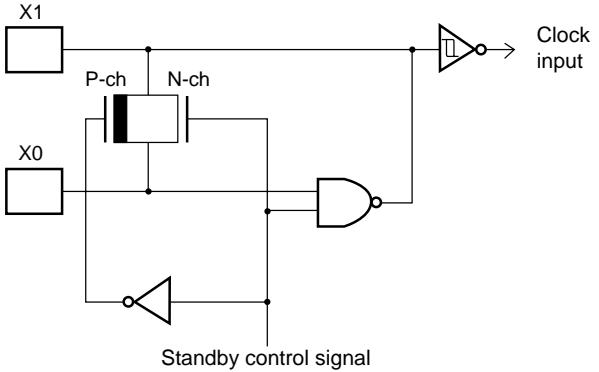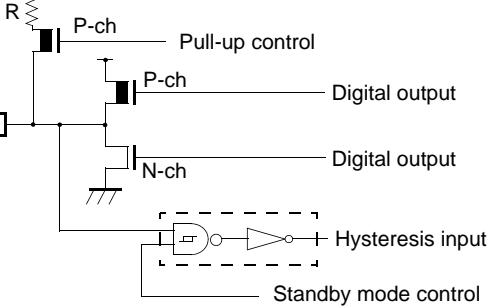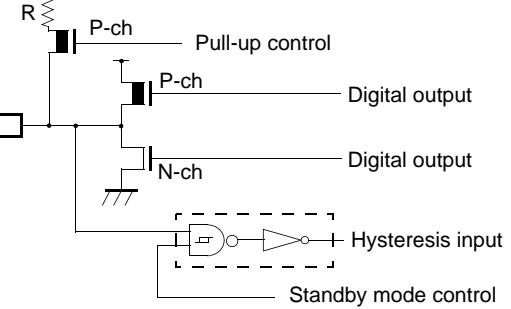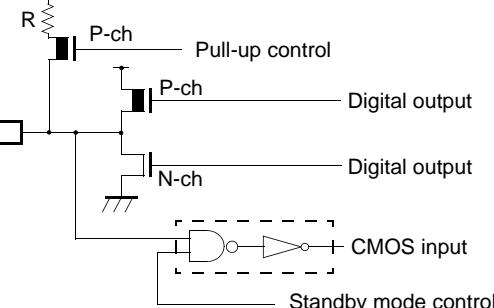Classification	Type	Remarks
A	 <p>X1 X0 P-ch N-ch Clock input Standby control signal</p>	Main clock (main clock crystal oscillator) • Oscillation feedback resistor : approx. 1 MΩ
B	 <p>R</p>	• Hysteresis input • Pull-up resistor : approx. 50 kΩ
C	 <p>R P-ch Pull-up control Digital output N-ch Digital output Hysteresis input Standby mode control</p>	• CMOS output • Hysteresis input • Selectable pull-up resistor : approx. 50 kΩ • $I_{OL} = 12 \text{ mA}$
D	 <p>R P-ch Pull-up control Digital output N-ch Digital output Hysteresis input Standby mode control</p>	• CMOS output • Hysteresis input • Selectable pull-up resistor : approx. 50 kΩ • $I_{OL} = 4 \text{ mA}$
E	 <p>R P-ch Pull-up control Digital output N-ch Digital output CMOS input Standby mode control</p>	• CMOS output • CMOS input • With pull-up control • $I_{OL} = 4 \text{ mA}$






(Continued)

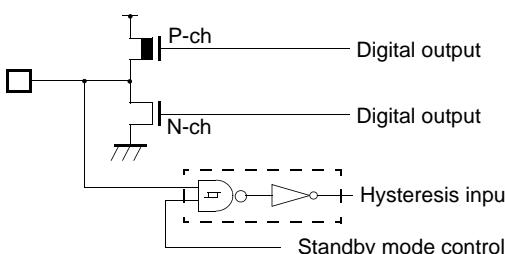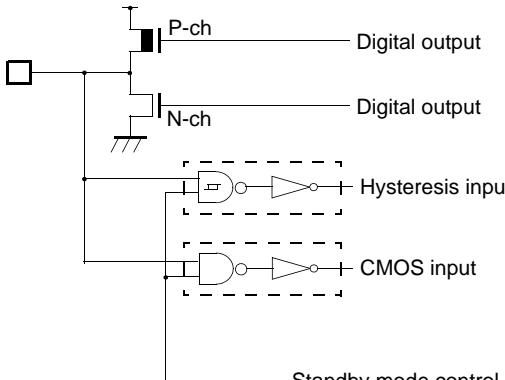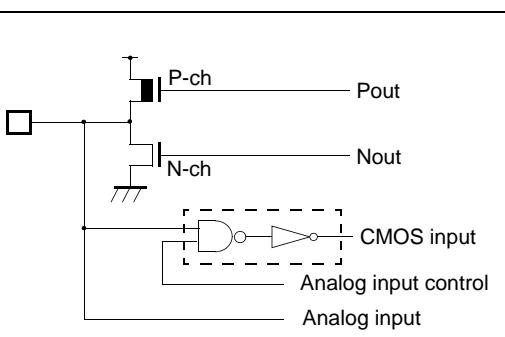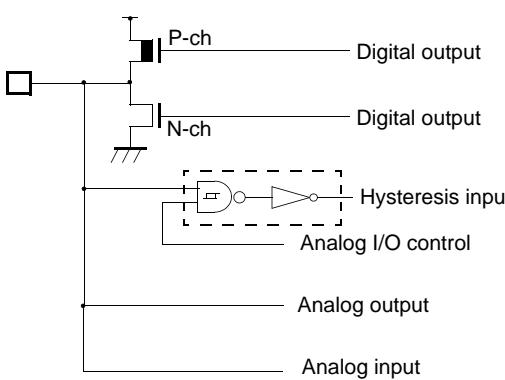Classification	Type	Remarks
F	 <p>P-ch Digital output N-ch Digital output Hysteresis input Standby mode control</p>	<ul style="list-style-type: none"> CMOS output Hysteresis input $I_{OL} = 4 \text{ mA}$
G	 <p>P-ch Digital output N-ch Digital output Hysteresis input CMOS input Standby mode control</p>	<ul style="list-style-type: none"> CMOS output Hysteresis input CMOS input (selectable for UART ch0 data input pin) $I_{OL} = 4 \text{ mA}$
H	 <p>Pout Nout CMOS input Analog input control Analog input</p>	<ul style="list-style-type: none"> CMOS output CMOS input Analog input $I_{OL} = 4 \text{ mA}$
I	 <p>Digital output Digital output Hysteresis input Analog I/O control Analog output Analog input</p>	<ul style="list-style-type: none"> CMOS output Hysteresis input Analog output Analog input $I_{OL} = 4 \text{ mA}$

(Continued)

MB90820 Series

(Continued)

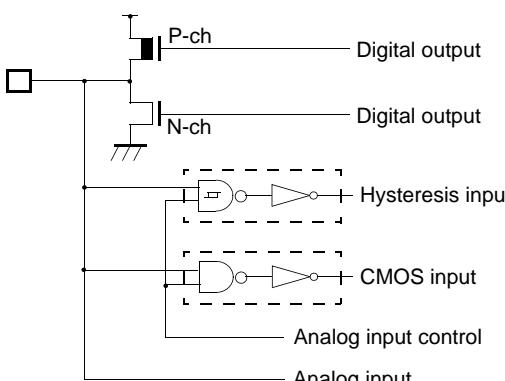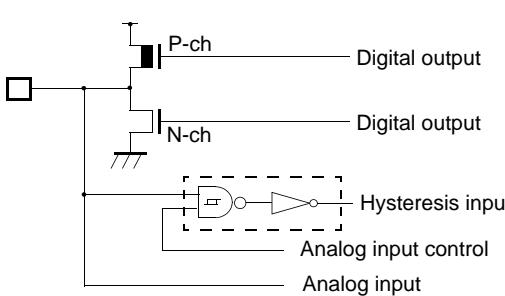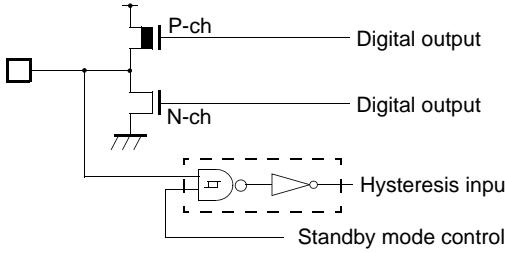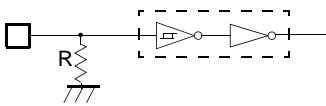Classification	Type	Remarks
J	 <p>Digital output Digital output Hysteresis input CMOS input Analog input control Analog input</p>	<ul style="list-style-type: none"> CMOS output Hysteresis input CMOS input (selectable for UART ch1 data input pin) $I_{OL} = 4 \text{ mA}$
K	 <p>Digital output Digital output Hysteresis input Analog input control Analog input</p>	<ul style="list-style-type: none"> CMOS output Hysteresis input Analog input $I_{OL} = 4 \text{ mA}$
L	 <p>Digital output Digital output Hysteresis input Standby mode control</p>	<ul style="list-style-type: none"> CMOS output Hysteresis input $I_{OL} = 12 \text{ mA}$
M		<p>Mask ROM / evaluation product</p> <ul style="list-style-type: none"> Hysteresis input Pull-down resistor : approx. $50 \text{ k}\Omega$ <p>Flash memory product</p> <ul style="list-style-type: none"> CMOS input No pull-down resistor
N		<p>Mask ROM / evaluation product</p> <ul style="list-style-type: none"> Hysteresis input <p>Flash memory product</p> <ul style="list-style-type: none"> CMOS input

■ HANDLING DEVICES

Special care is required for the following when handling the device :

- Preventing latch-up
- Stabilization of supply voltage
- Treatment of unused pins
- Using external clock
- Power supply pins (V_{CC} / V_{SS})
- Pull-up/pull-down resistors
- Crystal Oscillator Circuit
- Turning-on Sequence of Power Supply to A/D Converter and D/A Converter, and Analog Inputs
- Connection of Unused Pins of A/D Converter and D/A Converter if A/D Converter and D/A Converter are unused
- Notes on energization
- Notes on During Operation of PLL Clock Mode

1. Preventing latch-up

CMOS IC chips may suffer latch-up under the following conditions :

- A voltage higher than V_{CC} or lower than V_{SS} is applied to an input or output pin.
- A voltage higher than the rated voltage is applied between V_{CC} and V_{SS} .
- The AV_{CC} power supply is applied before the V_{CC} voltage.

Latch-up may increase the power supply current drastically, causing thermal damage to the device.

In using the devices, take sufficient care to avoid exceeding maximum ratings.

For the same reason, also be careful not to let the analog power-supply voltage (AV_{CC} , AVR) exceed the digital power-supply voltage.

2. Stabilization of supply voltage

A sudden change in the supply voltage may cause the device to malfunction even within the specified V_{CC} supply voltage operation range. Therefore, the V_{CC} supply voltage should be stabilized.

For reference, the supply voltage should be controlled so that V_{CC} ripple variations (peak-to-peak values) at commercial frequencies (50 Hz to 60 Hz) fall below 10% of the standard V_{CC} supply voltage and the coefficient of fluctuation does not exceed 0.1 V/ms at instantaneous power switching.


3. Treatment of unused pins

Leaving unused input pins open may result in misbehavior or latch up and possible permanent damage of the device. Therefore they must be pulled up or pulled down through resistors. In this case those resistors should be more than 2 k Ω .

Unused bidirectional pins should be set to the output state and can be left open, or the input state with the above described connection.

4. Using external clock


To use external clock, drive the X0 pin and leave X1 pin open.

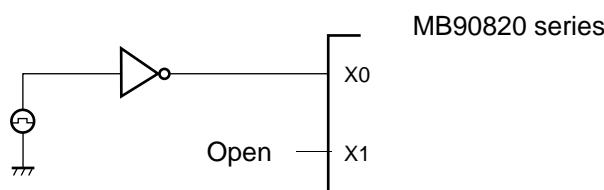

MB90820 Series

5. Power supply pins (V_{cc}/V_{ss})

- If there are multiple V_{cc} and V_{ss} pins, from the point of view of device design, pins to be of the same potential are connected the inside of the device to prevent such malfunctioning as latch up.
To reduce unnecessary radiation, prevent malfunctioning of the strobe signal due to the rise of ground level, and observe the standard for total output current, be sure to connect the V_{cc} and V_{ss} pins to the power supply and ground externally.
- Connect V_{cc} and V_{ss} to the device from the current supply source at a low impedance.
- As a measure against power supply noise, connect a capacitor of about 0.1 μ F as a bypass capacitor between V_{cc} and V_{ss} in the vicinity of V_{cc} and V_{ss} pins of the device.

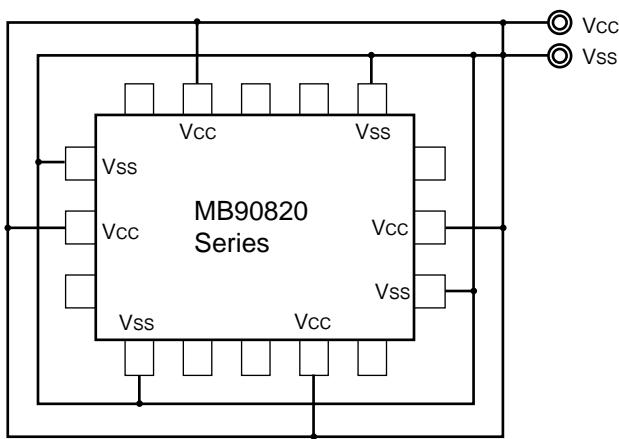

6. Pull-up/pull-down resistors

The MB90820 series does not support internal pull-up/pull-down resistors option (Port 0 to Port 3 : built-in pull-up resistors) . Use external components where needed.

7. Crystal oscillator circuit

Noises around X0 or X1 pins may be possible causes of abnormal operations. Make sure to provide bypass capacitors via shortest distance from X0, X1 pins, crystal oscillator (or ceramic oscillator) and ground lines, and make sure, to the utmost effort, that lines of oscillation circuit do not cross the lines of other circuits while you design a printed circuit board.

It is highly recommended to provide a printed circuit board art work surrounding X0 and X1 pins with a ground area for stabilizing the operation.

8. Turning-on sequence of power supply to A/D converter and D/A converter, and analog inputs

Make sure to turn on the A/D converter power supply, D/A converter power supply (AV_{cc}, AVR_H, AVR) and analog inputs (AN0 to AN15) after turning-on the digital power supply (V_{cc}).

Turn-off the digital power after turning off the A/D converter power supply, D/A converter power supply, and analog inputs. In this case, make sure that the voltage not exceed AVR or AV_{cc} (turning on/off the analog and digital power supplies simultaneously is acceptable).

9. Connection of unused pins of A/D converter and D/A converter if A/D converter and D/A converter are unused

Connect unused pins of A/D converter and D/A converter to AV_{cc} = V_{cc}, AV_{ss} = AVR_H = AVRL = V_{ss}.

10. Notes on energization


To prevent the internal regulator circuit from malfunctioning, set the voltage rise time during energization at 50 μ s or more (0.2 V to 2.7 V) .

11. Notes on During Operation of PLL Clock Mode


If the PLL clock mode is selected, the microcontroller attempts to be working with the self-oscillating circuit even when there is no external oscillator or external clock input is stopped. Performance of this operation, however, cannot be guaranteed.

MB90820 Series

■ BLOCK DIAGRAM

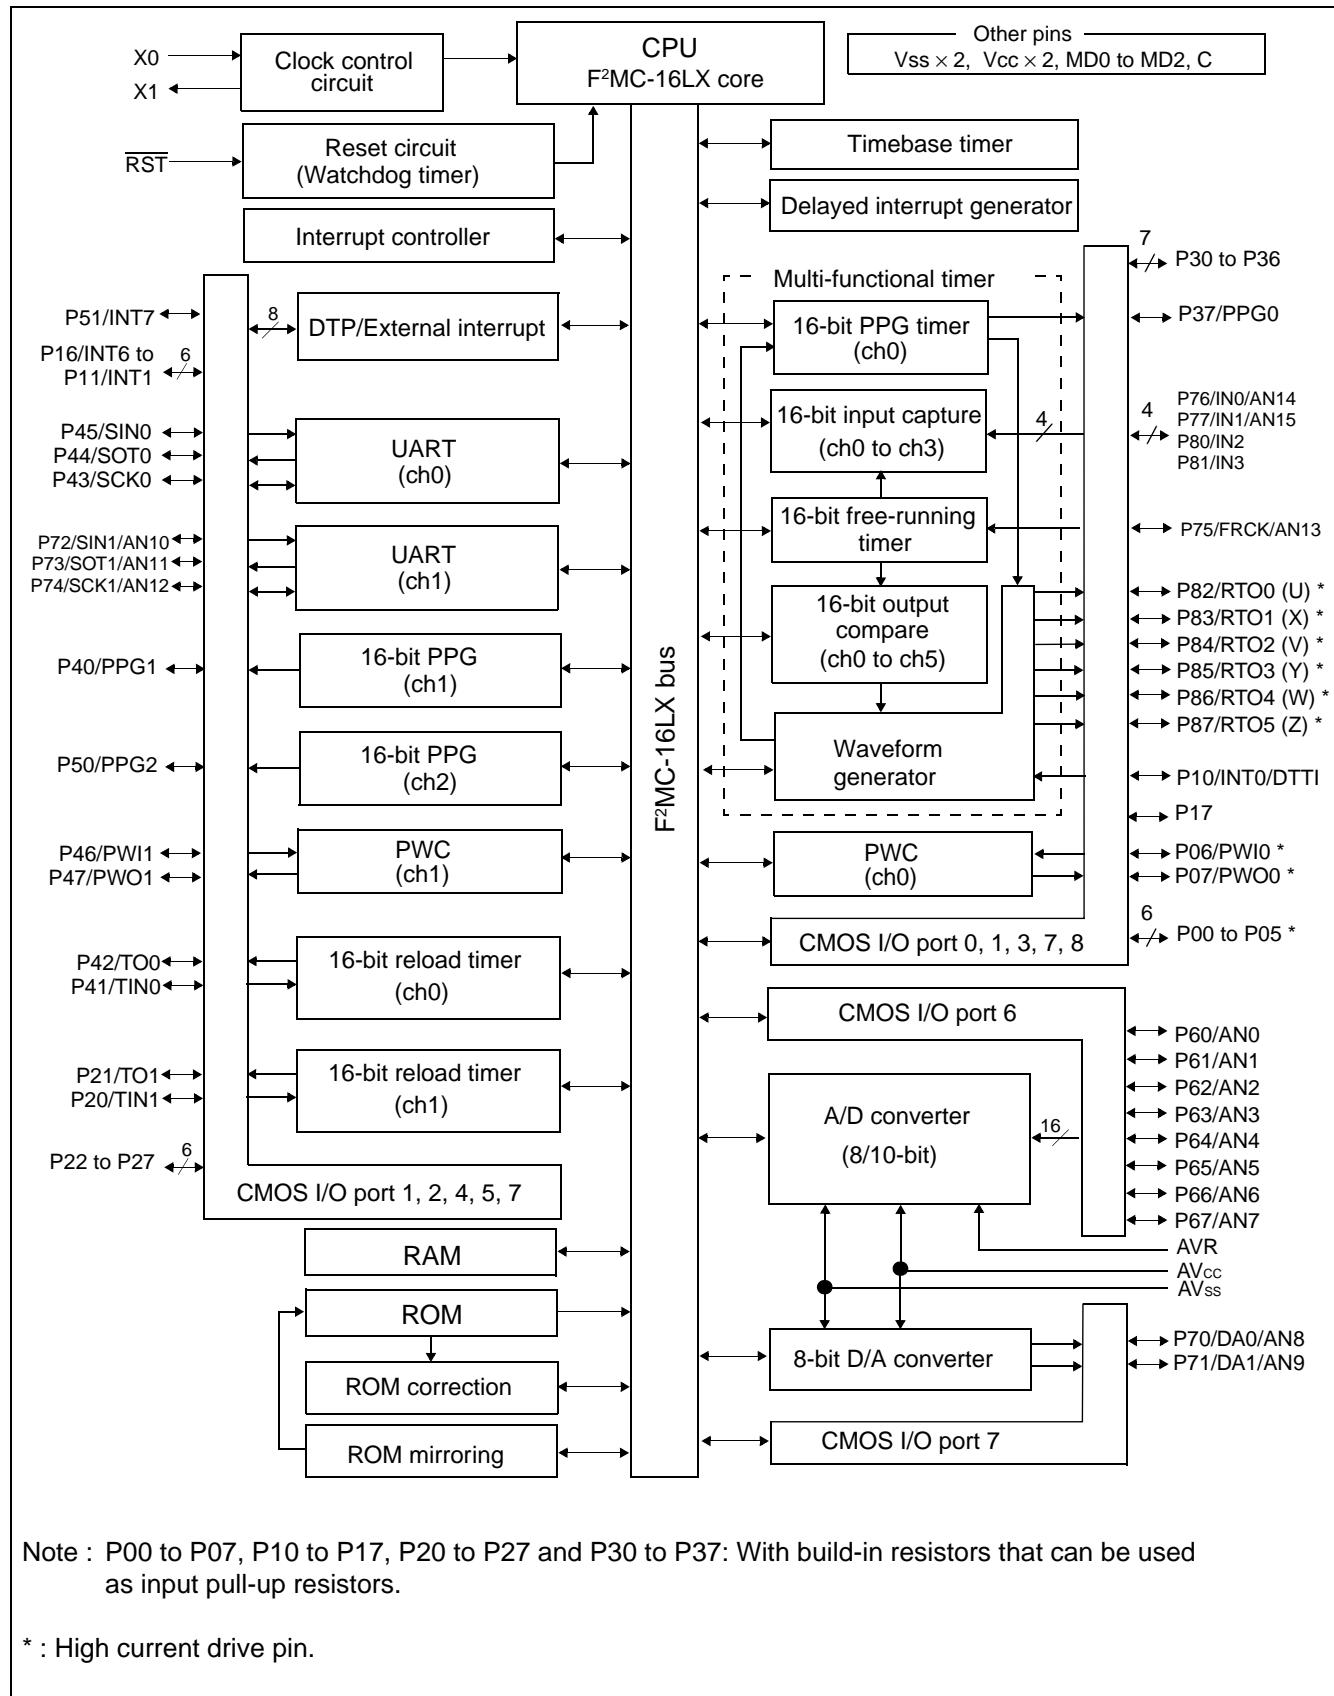

■ MEMORY MAP

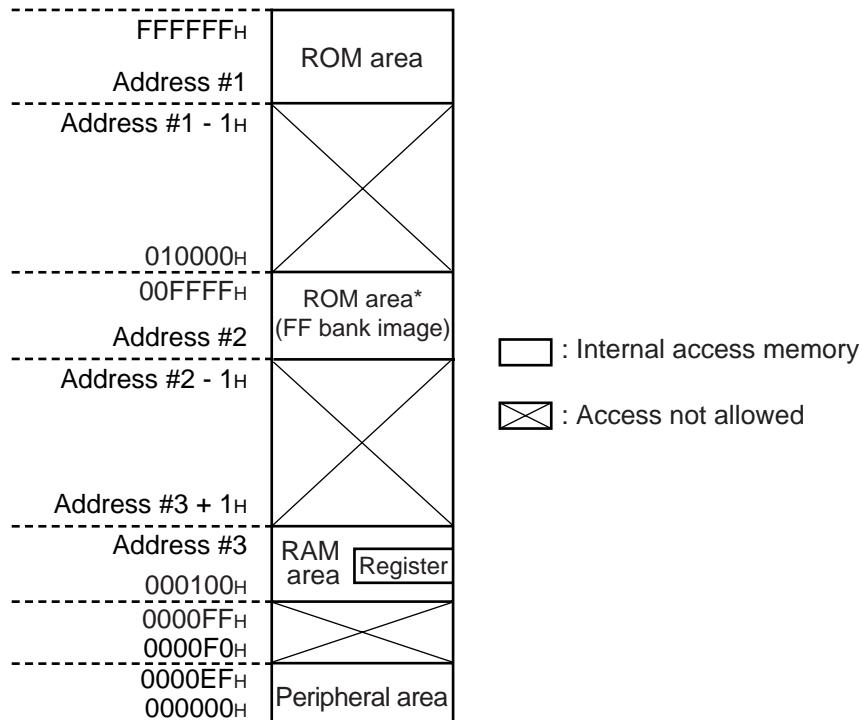

* : In Single chip mode, the mirror function is supported.


Parts no.	Address#1	Address#2	Address#3
MB90822	FF0000H	008000H	0010FFH
MB90823	FE0000H	008000H	0010FFH
MB90F822A	FF0000H	008000H	0010FFH
MB90F823A	FE0000H	008000H	0010FFH
MB90V820	(FE0000H)	008000H	0040FFH

Note: The ROM data of bank FF is reflected to the upper address of bank 00, realizing effective use of the C compiler small model. The lower 16-bit is assigned to the same address, enabling reference of the table on the ROM without stating "far". For example, if an attempt has been made to access 00C000H, the contents of the ROM at FFC000H are accessed actually. Since the ROM area of the FF bank exceeds 32K bytes, the whole area cannot be reflected in the image for the 00 bank. The ROM data at FF8000H to FFFFFFFH looks, therefore, as if it were the image for 008000H to 00FFFFH. Thus, it is recommended that the ROM data table be stored in the area of FF8000H to FFFFFFFH.


MB90820 Series

■ F²MC-16LX CPU PROGRAMMING MODEL

- Dedicated registers

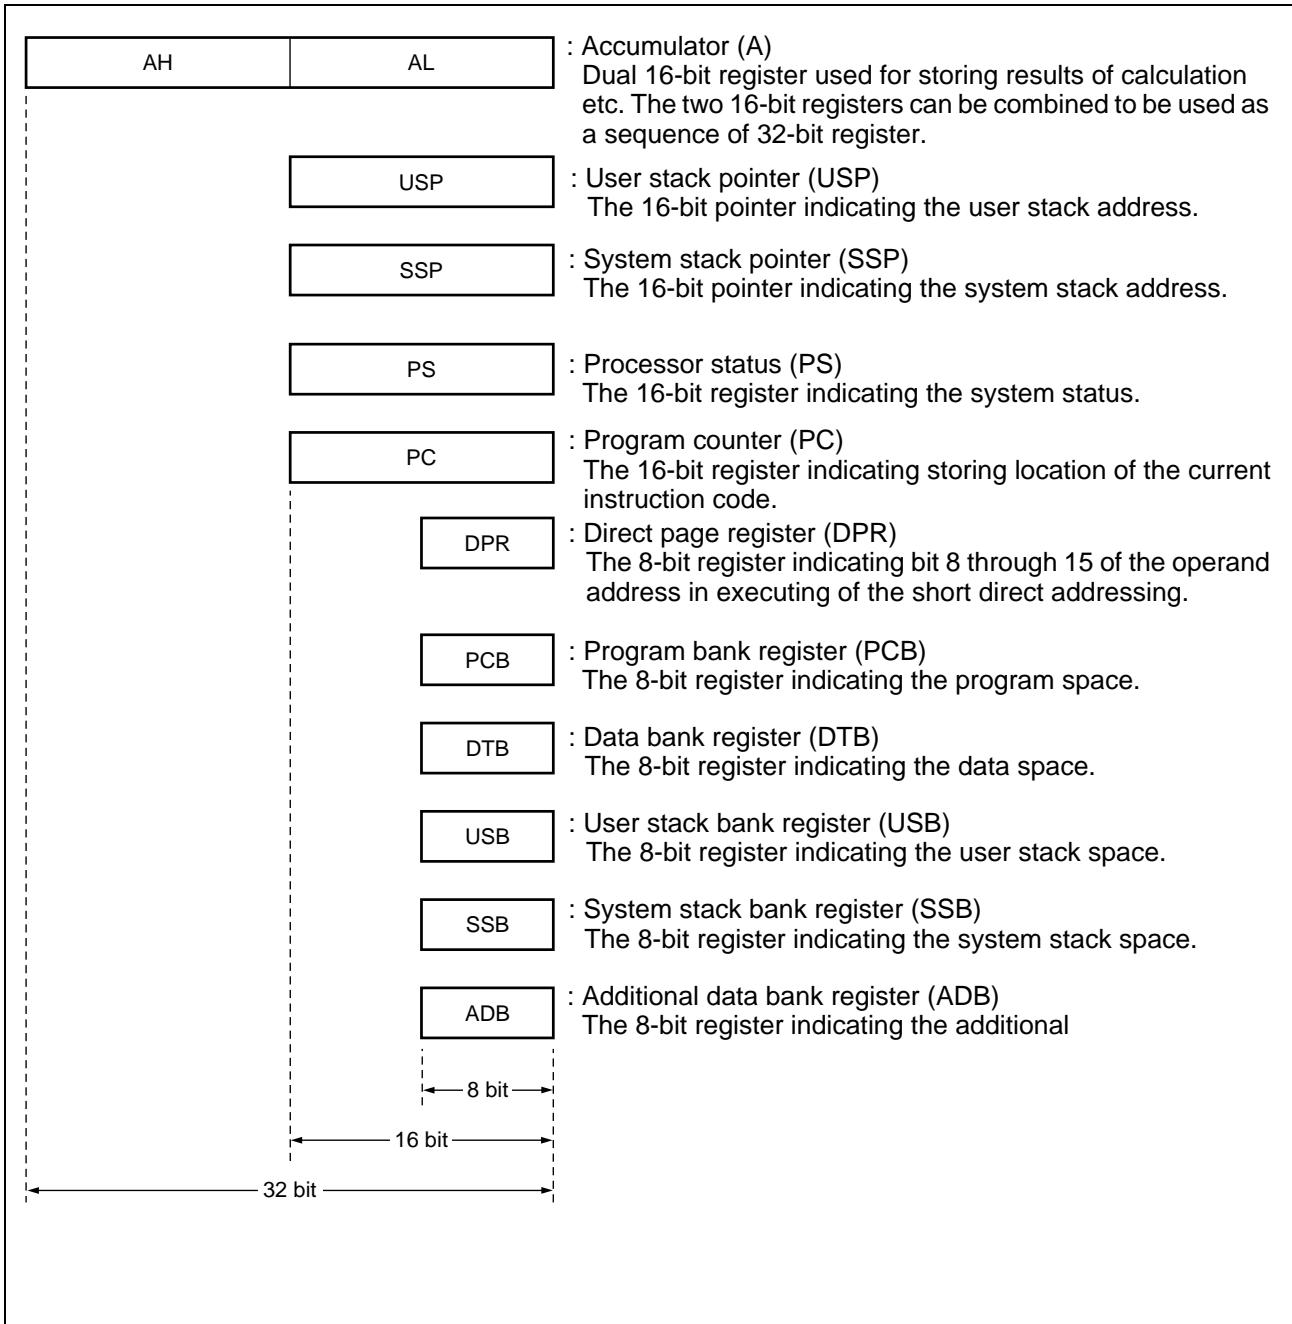

- General-purpose registers

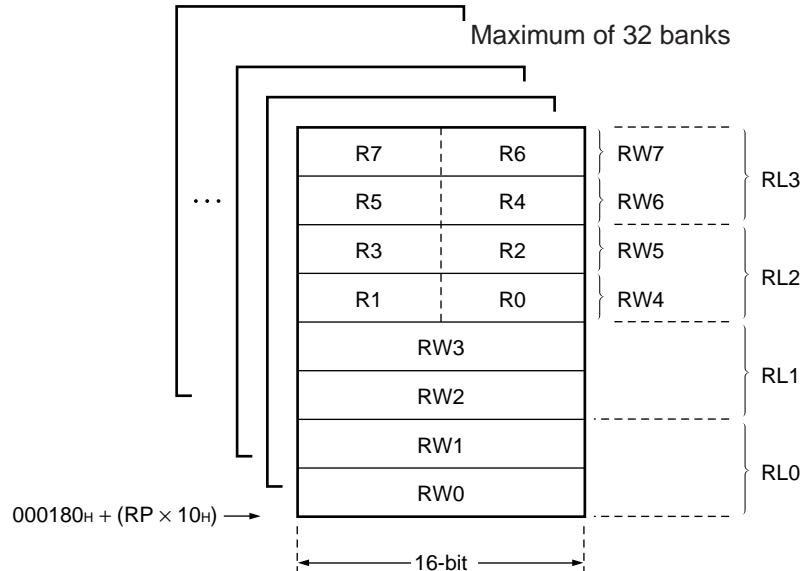

- Processor status (PS)

	ILM				RP				CCR							
PS	bit 15	bit 14	bit 13	bit 12	bit 11	bit 10	bit 9	bit 8	bit 7	bit 6	bit 5	bit 4	bit 3	bit 2	bit 1	bit 0
Initial value	0	0	0	0	0	0	0	0	—	0	1	X	X	X	X	X
—	: Unused															
X	: Undefined															

MB90820 Series

■ I/O MAP

Address	Abbreviation	Register	Byte access	Word access	Resource name	Initial value
0000000H	PDR0	Port 0 data register	R/W	R/W	Port 0	XXXXXXXXXXB
0000001H	PDR1	Port 1 data register	R/W	R/W	Port 1	XXXXXXXXXXB
0000002H	PDR2	Port 2 data register	R/W	R/W	Port 2	XXXXXXXXXXB
0000003H	PDR3	Port 3 data register	R/W	R/W	Port 3	XXXXXXXXXXB
0000004H	PDR4	Port 4 data register	R/W	R/W	Port 4	XXXXXXXXXXB
0000005H	PDR5	Port 5 data register	R/W	R/W	Port 5	XXXXXXXXXXB
0000006H	PDR6	Port 6 data register	R/W	R/W	Port 6	XXXXXXXXXXB
0000007H	PDR7	Port 7 data register	R/W	R/W	Port 7	XXXXXXXXXXB
0000008H	PDR8	Port 8 data register	R/W	R/W	Port 8	XXXXXXXXXXB
0000009H to 00000F _H		Prohibited area				
000010H	DDR0	Port 0 data direction register	R/W	R/W	Port 0	00000000B
000011H	DDR1	Port 1 data direction register	R/W	R/W	Port 1	00000000B
000012H	DDR2	Port 2 data direction register	R/W	R/W	Port 2	00000000B
000013H	DDR3	Port 3 data direction register	R/W	R/W	Port 3	00000000B
000014H	DDR4	Port 4 data direction register	R/W	R/W	Port 4	00000000B
000015H	DDR5	Port 5 data direction register	R/W	R/W	Port 5	XXXXXX00B
000016H	DDR6	Port 6 data direction register	R/W	R/W	Port 6	00000000B
000017H	DDR7	Port 7 data direction register	R/W	R/W	Port 7	00000000B
000018H	DDR8	Port 8 data direction register	R/W	R/W	Port 8	00000000B
000019H to 00001F _H		Prohibited area				
000020H	SMR0	Serial mode register ch0	R/W	R/W	UART ch0	00000000B
000021H	SCR0	Serial control register ch0	W, R/W	W, R/W		00000100B
000022H	SIDR0 / SODR0	Serial input data register ch0 / Serial output data register ch0	R/W	R/W		XXXXXXXXXXB
000023H	SSR0	Serial status register ch0	R, R/W	R, R/W		00001000B
000024H	SMR1	Serial mode register ch1	R/W	R/W	UART ch1	00000000B
000025H	SCR1	Serial control register ch1	W, R/W	W, R/W		00000100B
000026H	SIDR1 / SODR1	Serial input data register ch1 / Serial output data register ch1	R/W	R/W		XXXXXXXXXXB
000027H	SSR1	Serial status register ch1	R, R/W	R, R/W		00001000B
000028H	PWCSL1	PWC control status register ch1	R/W	R/W	PWC timer ch1	00000000B
000029H	PWCSH1		R, R/W	R, R/W		00000000B
00002AH	PWC1	PWC data buffer register ch1	—	R/W		XXXXXXXXXXB
00002BH						XXXXXXXXXXB
00002CH	DIV1	Divide ratio control register ch1	R/W	R/W		XXXXXX00B

(Continued)

MB90820 Series

Address	Abbreviation	Register	Byte access	Word access	Resource name	Initial value	
00002D _H , 00002E _H		Prohibited area					
00002F _H	PCKCR	PLL clock control register	W	W	PLL	XXXX0000 _B	
000030 _H	ENIR	DTP / Interrupt enable register	R/W	R/W	DTP/ external interrupt ch0 to ch7	00000000 _B	
000031 _H	EIRR	DTP / Interrupt cause register	R/W	R/W		XXXXXXXXXX _B	
000032 _H	ELVRL	Request level setting register (lower byte)	R/W	R/W		00000000 _B	
000033 _H	ELVRH	Request level setting register (higher byte)	R/W	R/W		00000000 _B	
000034 _H		Prohibited area					
000035 _H	CDCR0	Clock division ratio control register ch0	R/W	R/W	Communication prescaler ch0	00XXX000 _B	
000036 _H		Prohibited area					
000037 _H	CDCR1	Clock division ratio control register ch1	R/W	R/W	Communication prescaler ch1	00XXX000 _B	
000038 _H	PDCR0	PPG down counter register ch0	—	R	16-bit PPG timer ch0	11111111 _B	
000039 _H						11111111 _B	
00003A _H	PCSR0	PPG period setting register ch0	—	W		XXXXXXXXXX _B	
00003B _H						XXXXXXXXXX _B	
00003C _H	PDUT0	PPG duty setting register ch0	—	W		XXXXXXXXXX _B	
00003D _H						XXXXXXXXXX _B	
00003E _H	PCNTL0	PPG control status register ch0	R/W	R/W		XX000000 _B	
00003F _H	PCNTH0		R/W	R/W		00000000 _B	
000040 _H	PDCR1	PPG down counter register ch1	—	R	16-bit PPG timer ch1	11111111 _B	
000041 _H						11111111 _B	
000042 _H	PCSR1	PPG period setting register ch1	—	W		XXXXXXXXXX _B	
000043 _H						XXXXXXXXXX _B	
000044 _H	PDUT1	PPG duty setting register ch1	—	W		XXXXXXXXXX _B	
000045 _H						XXXXXXXXXX _B	
000046 _H	PCNTL1	PPG control status register ch1	R/W	R/W		XX000000 _B	
000047 _H	PCNTH1		R/W	R/W		00000000 _B	
000048 _H	PDCR2	PPG down counter register ch2	—	R	16-bit PPG timer ch2	11111111 _B	
000049 _H						11111111 _B	
00004A _H	PCSR2	PPG period setting register ch2	—	W		XXXXXXXXXX _B	
00004B _H						XXXXXXXXXX _B	
00004C _H	PDUT2	PPG duty setting register ch2	—	W		XXXXXXXXXX _B	
00004D _H						XXXXXXXXXX _B	
00004E _H	PCNTL2	PPG control status register ch2	R/W	R/W		XX000000 _B	
00004F _H	PCNTH2		R/W	R/W		00000000 _B	

(Continued)

MB90820 Series

Address	Abbreviation	Register	Byte access	Word access	Resource name	Initial value	
000050 _H	TMRR0	16-bit timer register ch0	—	R/W	Waveform generator	XXXXXXXX _B	
000051 _H						XXXXXXXX _B	
000052 _H		16-bit timer register ch1	—	R/W		XXXXXXXX _B	
000053 _H						XXXXXXXX _B	
000054 _H		16-bit timer register ch2	—	R/W		XXXXXXXX _B	
000055 _H						XXXXXXXX _B	
000056 _H	DTCR0	16-bit timer control register ch0	R/W	R/W		00000000 _B	
000057 _H	DTCR1	16-bit timer control register ch1	R/W	R/W		00000000 _B	
000058 _H	DTCR2	16-bit timer control register ch2	R/W	R/W		00000000 _B	
000059 _H	SIGCR	Waveform control register	R/W	R/W		00000000 _B	
00005A _H	CPCLRB / CPCLR	Compare clear buffer register/ Compare clear register	—	R/W	16-bit free-running timer	11111111 _B	
00005B _H						11111111 _B	
00005C _H	TCDT	Timer data register	—	R/W		00000000 _B	
00005D _H						00000000 _B	
00005E _H	TCCSL	Timer control status register (lower)	R/W	R/W	16-bit free-running timer	X0000000 _B	
00005F _H	TCCSH	Timer control status register (upper)	R/W	R/W		00000000 _B	
000060 _H	IPCP0	Input capture data register ch0	—	R	16-bit input capture (ch0 to ch3)	XXXXXXXX _B	
000061 _H						XXXXXXXX _B	
000062 _H		Input capture data register ch1	—	R		XXXXXXXX _B	
000063 _H						XXXXXXXX _B	
000064 _H	IPCP2	Input capture data register ch2	—	R		XXXXXXXX _B	
000065 _H						XXXXXXXX _B	
000066 _H		Input capture data register ch3	—	R		XXXXXXXX _B	
000067 _H						XXXXXXXX _B	
000068 _H	PICSL01	Input capture control status register ch0,ch1 (lower)	R/W	R/W		00000000 _B	
000069 _H	PICSH01	PPG output control / Input capture control status register ch0,ch1 (upper)	R/W	R/W		00000000 _B	
00006A _H	ICSL23	Input capture control status register ch2,ch3 (lower)	R/W	R/W		00000000 _B	
00006B _H	ICSH23	Input capture control status register ch2,ch3 (upper)	R	R		XXXXXX00 _B	
00006C _H to 00006E _H		Prohibited area					

(Continued)

MB90820 Series

Address	Abbreviation	Register	Byte access	Word access	Resource name	Initial value
00006F _H	ROMM	ROM mirroring function selection register	W	W	ROM mirroring function	XXXXXXX1 _B
000070 _H	OCCPB0 / OCCP0	Output compare buffer register / Output compare register ch0	—	R/W		XXXXXXXXX _B
000071 _H	OCCPB1 / OCCP1	Output compare buffer register / Output compare register ch1	—	R/W		XXXXXXXXX _B
000074 _H	OCCPB2 / OCCP2	Output compare buffer register / Output compare register ch2	—	R/W		XXXXXXXXX _B
000076 _H	OCCPB3 / OCCP3	Output compare buffer register / Output compare register ch3	—	R/W		XXXXXXXXX _B
000078 _H	OCCPB4 / OCCP4	Output compare buffer register / Output compare register ch4	—	R/W		XXXXXXXXX _B
00007A _H	OCCPB5 / OCCP5	Output compare buffer register / Output compare register ch5	—	R/W		XXXXXXXXX _B
00007C _H	OCS0	Compare control register ch0	R/W	R/W		00001100 _B
00007D _H	OCS1	Compare control register ch1	R/W	R/W		X1100000 _B
00007E _H	OCS2	Compare control register ch2	R/W	R/W		00001100 _B
00007F _H	OCS3	Compare control register ch3	R/W	R/W		X1100000 _B
000080 _H	OCS4	Compare control register ch4	R/W	R/W		00001100 _B
000081 _H	OCS5	Compare control register ch5	R/W	R/W		X1100000 _B
000082 _H	TMCSRL0	Timer control status register ch0 (lower)	R/W	R/W	16-bit reload timer (ch0)	00000000 _B
000083 _H	TMCSRH0	Timer control status register ch0 (upper)	R/W	R/W		XXX10000 _B
000084 _H	TMR0 / TMRD0	16 bit timer register ch0 / 16-bit reload register ch0	—	R/W		XXXXXXXXX _B
000086 _H	TMCSRL1	Timer control status register ch1 (lower)	R/W	R/W		XXXXXXXXX _B
000087 _H	TMCSRH1	Timer control status register ch1 (upper)	R/W	R/W	16-bit reload timer (ch1)	00000000 _B
000088 _H	TMR1 / TMRD1	16 bit timer register ch1 / 16-bit reload register ch1	—	R/W		XXX10000 _B
000089 _H						XXXXXXXXX _B
00008A _H , 00008B _H		Prohibited area				
00008C _H	RDR0	Port 0 pull-up resistor setting register	R/W	R/W	Port 0	00000000 _B
00008D _H	RDR1	Port 1 pull-up resistor setting register	R/W	R/W	Port 1	00000000 _B

(Continued)

MB90820 Series

Address	Abbreviation	Register	Byte access	Word access	Resource name	Initial value
00008E _H	RDR2	Port 2 pull-up resistor setting register	R/W	R/W	Port 2	00000000 _B
00008F _H	RDR3	Port 3 pull-up resistor setting register	R/W	R/W	Port 3	00000000 _B
000090 _H to 00009D _H	Prohibited area					
00009E _H	PACSR	Program address detection control status register	R/W	R/W	Address match detection	XXXX0000 _B
00009F _H	DIRR	Delayed interrupt cause / clear register	R/W	R/W	Delayed interrupt	XXXXXXXX0 _B
0000A0 _H	LPMCR	Low-power consumption mode control register	W, R/W	W, R/W	Low-power consumption control register	00011000 _B
0000A1 _H	CKSCR	Clock selection register	R, R/W	R, R/W		11111100 _B
0000A2 _H to 0000A7 _H	Prohibited area					
0000A8 _H	WDTC	Watchdog timer control register	R, R/W	R, R/W	Watchdog timer	XXXXX111 _B
0000A9 _H	TBTC	Timebase timer control register	W, R/W	W, R/W	Timebase timer	1XX00100 _B
0000AA _H to 0000AD _H	Prohibited area					
0000AE _H	FMCS	Flash memory control status register	R, R/W	R, R/W	Flash memory interface circuit	000X0000 _B
0000AF _H	Prohibited area					
0000B0 _H	ICR00	Interrupt control register 00	R/W	R/W	Interrupt controller	00000111 _B
0000B1 _H	ICR01	Interrupt control register 01	R/W	R/W		00000111 _B
0000B2 _H	ICR02	Interrupt control register 02	R/W	R/W		00000111 _B
0000B3 _H	ICR03	Interrupt control register 03	R/W	R/W		00000111 _B
0000B4 _H	ICR04	Interrupt control register 04	R/W	R/W		00000111 _B
0000B5 _H	ICR05	Interrupt control register 05	R/W	R/W		00000111 _B
0000B6 _H	ICR06	Interrupt control register 06	R/W	R/W		00000111 _B
0000B7 _H	ICR07	Interrupt control register 07	R/W	R/W		00000111 _B
0000B8 _H	ICR08	Interrupt control register 08	R/W	R/W		00000111 _B
0000B9 _H	ICR09	Interrupt control register 09	R/W	R/W		00000111 _B
0000BA _H	ICR10	Interrupt control register 10	R/W	R/W		00000111 _B
0000BB _H	ICR11	Interrupt control register 11	R/W	R/W		00000111 _B
0000BC _H	ICR12	Interrupt control register 12	R/W	R/W		00000111 _B
0000BD _H	ICR13	Interrupt control register 13	R/W	R/W		00000111 _B
0000BE _H	ICR14	Interrupt control register 14	R/W	R/W		00000111 _B
0000BF _H	ICR15	Interrupt control register 15	R/W	R/W		00000111 _B

(Continued)

(Continued)

Address	Abbreviation	Register	Byte access	Word access	Resource name	Initial value	
0000C0 _H	PWCSL0	PWC control status register ch0	R/W	R/W	PWC timer (ch0)	00000000 _B	
0000C1 _H	PWCSH0		R, R/W	R, R/W		00000000 _B	
0000C2 _H	PWC0		—	R/W		XXXXXXXX _B	
0000C3 _H			—	R/W		XXXXXXXX _B	
0000C4 _H	DIV0	Divide ratio control register ch0	R/W	R/W		XXXXXX00 _B	
0000C5 _H	ADER0	A/D input enable register 0	R/W	R/W	Port 6, A/D	11111111 _B	
0000C6 _H	ADCS0	A/D control status register 0	R/W	R/W		000XXXX0 _B	
0000C7 _H	ADCS1	A/D control status register 1	W, R/W	W, R/W		0000000X _B	
0000C8 _H	ADCR0	A/D data register 0	R	R		XXXXXXXX _B	
0000C9 _H	ADCR1	A/D data register 1	R	R		XXXXXXXX _B	
0000CA _H	ADSR0	A/D setting register 0	R/W	R/W		00000000 _B	
0000CB _H	ADSR1	A/D setting register 1	R/W	R/W		00000000 _B	
0000CC _H	DAT0	D/A data register 0	R/W	R/W		XXXXXXXX _B	
0000CD _H	DAT1	D/A data register 1	R/W	R/W	8-bit D/A converter	XXXXXXXX _B	
0000CE _H	DACR0	D/A control register 0	R/W	R/W		XXXXXXXX0 _B	
0000CF _H	DACR1	D/A control register 1	R/W	R/W		XXXXXXXX0 _B	
0000D0 _H	ADER1	A/D input enable register 1	R/W	R/W		Port 7, A/D	
0000D1 _H to 0000EF _H		Prohibited area					
0000F0 _H to 0000FF _H		External area					
001FF0 _H	PADRL0	Program address detection register 0 (lower)	R/W	R/W	Address match detection	XXXXXXXX _B	
001FF1 _H	PADRM0	Program address detection register 0 (middle)	R/W	R/W		XXXXXXXX _B	
001FF2 _H	PADRH0	Program address detection register 0 (higher)	R/W	R/W		XXXXXXXX _B	
001FF3 _H	PADRL1	Program address detection register 1 (lower)	R/W	R/W		XXXXXXXX _B	
001FF4 _H	PADRM1	Program address detection register 1 (middle)	R/W	R/W		XXXXXXXX _B	
001FF5 _H	PADRH1	Program address detection register 1 (higher)	R/W	R/W		XXXXXXXX _B	

- Meaning of abbreviations used for reading and writing

R/W: Read and write enabled

R : Read-only

W : Write-only

- Explanation of initial values

0 : The bit is initialized to "0".

1 : The bit is initialized to "1".

X : The initial value of the bit is undefined.

MB90820 Series

■ INTERRUPT FACTORS, INTERRUPT VECTORS, INTERRUPT CONTROL REGISTER

Interrupt cause	EI ² OS support	Interrupt vector		Interrupt control register		Priority		
		Number	Address	ICR	Address			
Reset	×	#08	08H	FFFFFDCH	—	High		
INT9 instruction	×	#09	09H	FFFFFD8H	—			
Exception processing	×	#10	0AH	FFFFFD4H	—			
A/D converter conversion termination	○	#11	0BH	FFFFFD0H	ICR00	0000B0H		
Output compare ch0 match	○	#12	0CH	FFFFFCCH				
End of measurement by PWC timer ch0 / PWC timer ch0 overflow	○	#13	0DH	FFFFFC8H	ICR01	0000B1H		
16-bit PPG timer ch0	○	#14	0EH	FFFFFC4H				
Output compare ch1 match	○	#15	0FH	FFFFFC0H	ICR02	0000B2H		
16-bit PPG timer ch1	○	#16	10H	FFFFFBCH				
Output compare ch2 match	○	#17	11H	FFFFFB8H	ICR03	0000B3H		
16-bit reload timer ch1 underflow	○	#18	12H	FFFFFB4H				
Output compare ch3 match	○	#19	13H	FFFFFB0H	ICR04	0000B4H		
DTP/ext. interrupt ch0/ch1 detection	○	#20	14H	FFFFFACH				
DTTI	△							
Output compare ch4 match	○	#21	15H	FFFFFA8H	ICR05	0000B5H		
DTP/ext. interrupt ch2/ch3 detection	○	#22	16H	FFFFFA4H				
Output compare ch5 match	○	#23	17H	FFFFFA0H	ICR06	0000B6H		
End of measurement by PWC timer ch1 / PWC timer ch1 overflow	○	#24	18H	FFFF9CH				
DTP/ext. interrupt ch4 detection	○	#25	19H	FFFF98H	ICR07	0000B7H		
DTP/ext. interrupt ch5 detection	○	#26	1AH	FFFF94H				
DTP/ext. interrupt ch6 detection	○	#27	1BH	FFFF90H	ICR08	0000B8H		
DTP/ext. interrupt ch7 detection	○	#28	1CH	FFFF8CH				
Waveform generator 16-bit timers ch0/ch1/ch2 underflow	△	#29	1DH	FFFF88H	ICR09	0000B9H		
16-bit reload timer ch0 underflow	○	#30	1EH	FFFF84H				
16-bit free-running timer zero detect	△	#31	1FH	FFFF80H	ICR10	0000BAH		
16-bit PPG timer ch2	○	#32	20H	FFFF7CH				
Input capture ch0/ch1	○	#33	21H	FFFF78H	ICR11	0000BBH		
16-bit free-running timer compare clear	△	#34	22H	FFFF74H				
Input capture ch2/ch3	○	#35	23H	FFFF70H	ICR12	0000BCH		
Timebase timer	△	#36	24H	FFFF6CH				
UART ch1 receive	○	#37	25H	FFFF68H	ICR13	0000BDH		
UART ch1 send	△	#38	26H	FFFF64H				
UART ch0 receive	○	#39	27H	FFFF60H	ICR14	0000BEH		
UART ch0 send	△	#40	28H	FFFF5CH				
Flash memory status	△	#41	29H	FFFF58H	ICR15	0000BFH		
Delayed interrupt generator module	△	#42	2AH	FFFF54H				

○ : Can be used and support the EI²OS stop request.

○ : Can be used and interrupt request flag is cleared by EI²OS interrupt clear signal.

× : Cannot be used.

△ : Usable when an interrupt cause that shares the ICR is not used.

■ PERIPHERAL RESOURCES

1. Low-power Consumption Control Circuit

The MB90820 series has the following CPU operating mode configured by selection of an operating clock and clock operation control.

- Clock mode

PLL clock mode : A PLL clock that is a multiple of the oscillation clock (HCLK) frequency is used to operate the CPU and peripheral functions.

Main clock mode : The main clock, with a frequency one-half that of the oscillation clock (HCLK), is used to operate the CPU and peripheral functions. In main clock mode, the PLL divide circuit is inactive.

- CPU intermittent operation mode

CPU intermittent operation mode causes the CPU to operate intermittently, while high-speed clock pulses are supplied to peripheral functions, reducing power consumption. In CPU intermittent operation mode, clock pulses are supplied intermittently to the CPU when it is accessing a register, internal memory, a peripheral function, or an external unit.

- Standby mode

In standby mode, the low power consumption control circuit reduces power consumption by stopping;

- The supply of the clock to CPU (sleep mode)
- CPU and peripheral functions (timebase timer mode)
- The oscillation clock itself (stop mode)

- PLL sleep mode

PLL sleep mode is activated to stop the CPU operating clock when the microcontroller enters PLL clock mode; other components continue to operate on the PLL clock.

- Main sleep mode

Main sleep mode is activated to stop the CPU operating clock when the microcontroller enters main clock mode; other components continue to operate on the main clock.

- PLL timebase timer mode

PLL timebase timer mode causes microcontroller operation, with the exception of the oscillation clock, PLL clock and timebase timer, to stop. All functions other than the timebase timer are deactivated.

- Main timebase timer mode

Main timebase timer mode causes microcontroller operation, with the exception of the oscillation clock, main clock and the timebase timer, to stop. All functions other than the timebase timer are deactivated.

- Stop mode


Stop mode causes the source oscillation to stop. All functions are deactivated.

MB90820 Series

(1) Register configuration

Clock Selection Register									Bit
Address:	00000A1H								CKSCR
Read/write	⇒ R/W	R	⇒ R/W						
Initial value	⇒ 1	1	1	1	1	1	0	0	
PLL Clock Control Register									Bit
Address:	000002F _H								PCKCR
Read/write	⇒ –	–	–	–	–	W	W	W	W
Initial value	⇒ X	X	X	X	0	0	0	0	
Low-power Consumption Mode Control Register									Bit
Address:	0000A0H								LPMCR
Read/write	⇒ W	W	W	⇒ R/W	W	W	⇒ R/W	⇒ R/W	
Initial value	⇒ 0	0	0	0	1	1	0	0	

(2) Block diagram

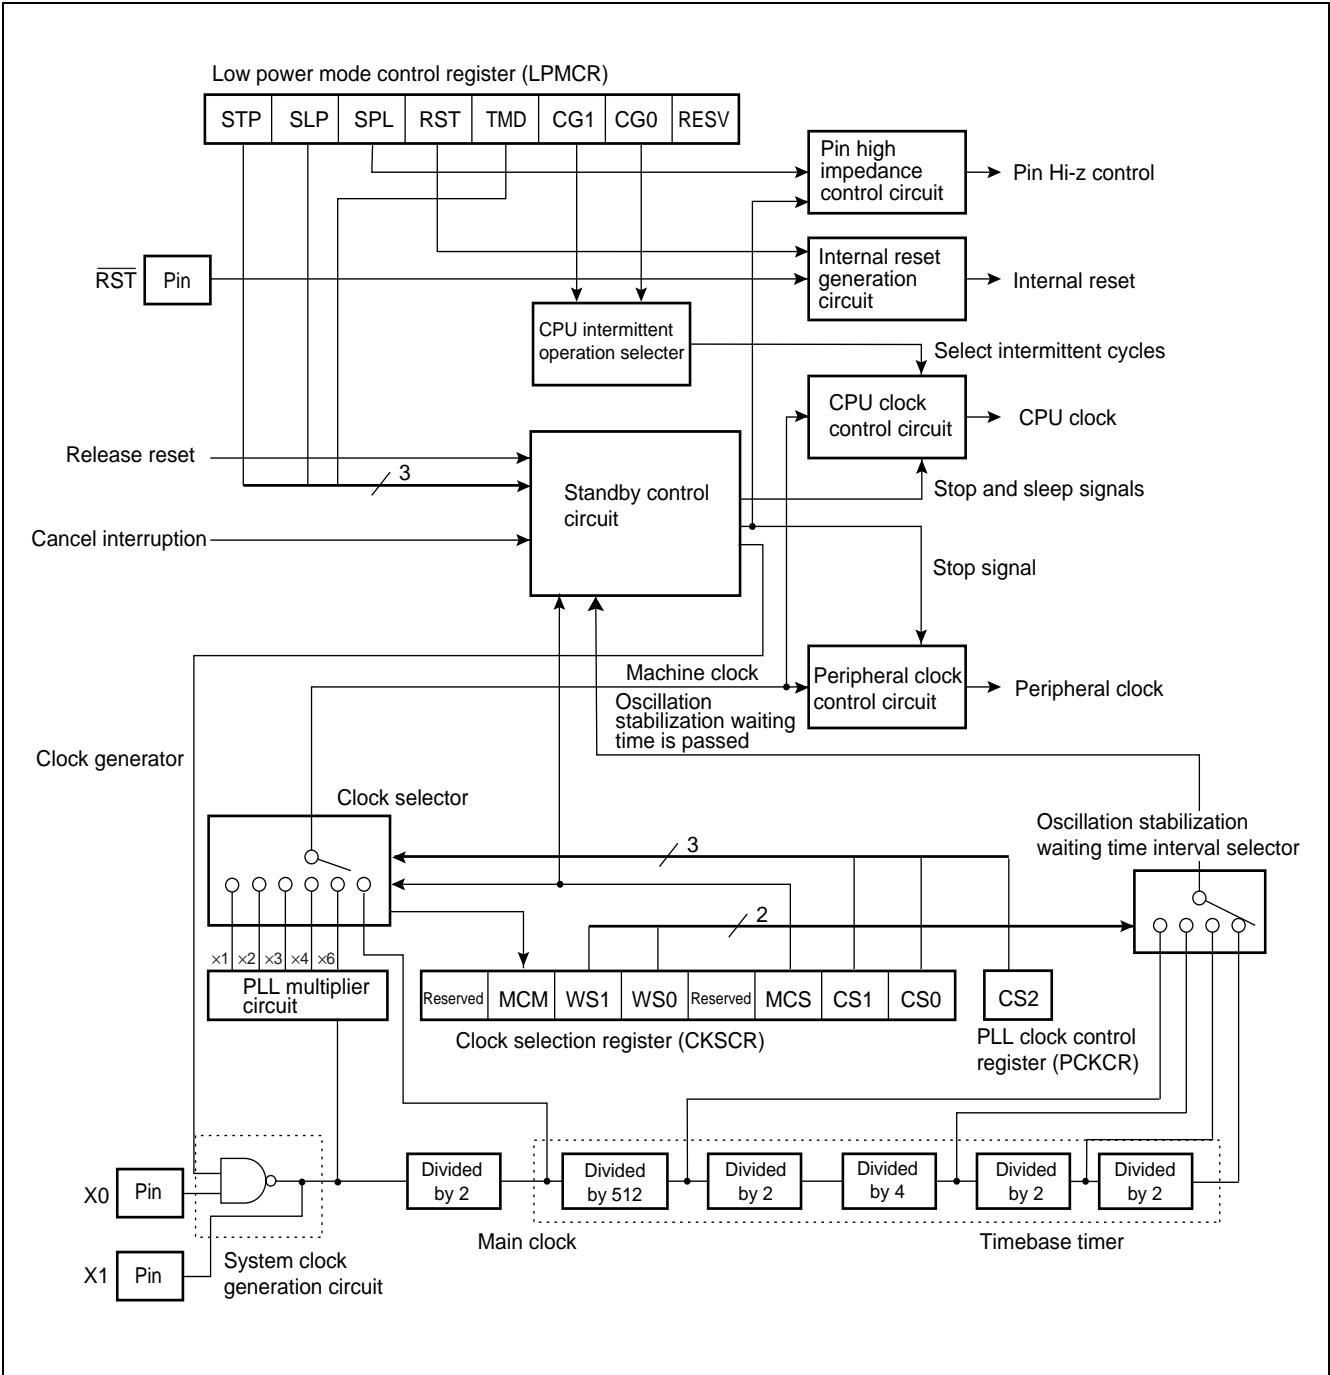

MB90820 Series

2. I/O Ports

(1) Outline of I/O ports

Each I/O port outputs data from CPU to I/O pins or inputs signals from I/O pins to CPU through port data register (PDR). Direction of the data flow (input or output) for each I/O pin can be designated in bit unit by port data direction register (DDR). The function of each port and the resource I/O multiplexed with it are described below:

- Port 0 : General-purpose I/O port/resource (PWC timer)
- Port 1 : General-purpose I/O port/resources (DTP / Multi-functional timer)
- Port 2 : General-purpose I/O port/resource (16-bit reload timer)
- Port 3 : General-purpose I/O port/resource (16-bit PPG timer)
- Port 4 : General-purpose I/O port/resources (16-bit PPG timer / 16-bit reload timer / UART / PWC)
- Port 5 : General-purpose I/O port/resources (16-bit PPG timer / DTP)
- Port 6 : General-purpose I/O port/resource (8/10-bit A/D converter)
- Port 7 : General-purpose I/O port/resources (8/10-bit A/D converter / 8-bit D/A converter / UART / 16-bit free-running timer / 16-bit input capture)
- Port 8 : General-purpose I/O port/resources (16-bit input capture / Multi-functional timer)

(2) Register configuration


Register	Read/Write	Address	Initial value
Port 0 data register (PDR0)	R/W	000000H	XXXXXXXXB
Port 1 data register (PDR1)	R/W	000001H	XXXXXXXXB
Port 2 data register (PDR2)	R/W	000002H	XXXXXXXXB
Port 3 data register (PDR3)	R/W	000003H	XXXXXXXXB
Port 4 data register (PDR4)	R/W	000004H	XXXXXXXXB
Port 5 data register (PDR5)	R/W	000005H	XXXXXXXXB
Port 6 data register (PDR6)	R/W	000006H	XXXXXXXXB
Port 7 data register (PDR7)	R/W	000007H	XXXXXXXXB
Port 8 data register (PDR8)	R/W	000008H	XXXXXXXXB
Port 0 data direction register (DDR0)	R/W	000010H	00000000B
Port 1 data direction register (DDR1)	R/W	000011H	00000000B
Port 2 data direction register (DDR2)	R/W	000012H	00000000B
Port 3 data direction register (DDR3)	R/W	000013H	00000000B
Port 4 data direction register (DDR4)	R/W	000014H	00000000B
Port 5 data direction register (DDR5)	R/W	000015H	XXXXXX00B
Port 6 data direction register (DDR6)	R/W	000016H	00000000B
Port 7 data direction register (DDR7)	R/W	000017H	00000000B
Port 8 data direction register (DDR8)	R/W	000018H	00000000B
A/D input enable register (ADER0)	R/W	0000C5H	11111111B
A/D input enable register (ADER1)	R/W	0000D0H	11111111B
Port 0 pull-up resistor setting register (RDR0)	R/W	00008CH	00000000B
Port 1 pull-up resistor setting register (RDR1)	R/W	00008DH	00000000B
Port 2 pull-up resistor setting register (RDR2)	R/W	00008EH	00000000B
Port 3 pull-up resistor setting register (RDR3)	R/W	00008FH	00000000B

R/W: Read/write enabled


X : Undefined

(3) Block diagram

- Block diagram of Port 0 (P00 to P06), Port 1 (P17) and Port 2 (excluding P21) pins

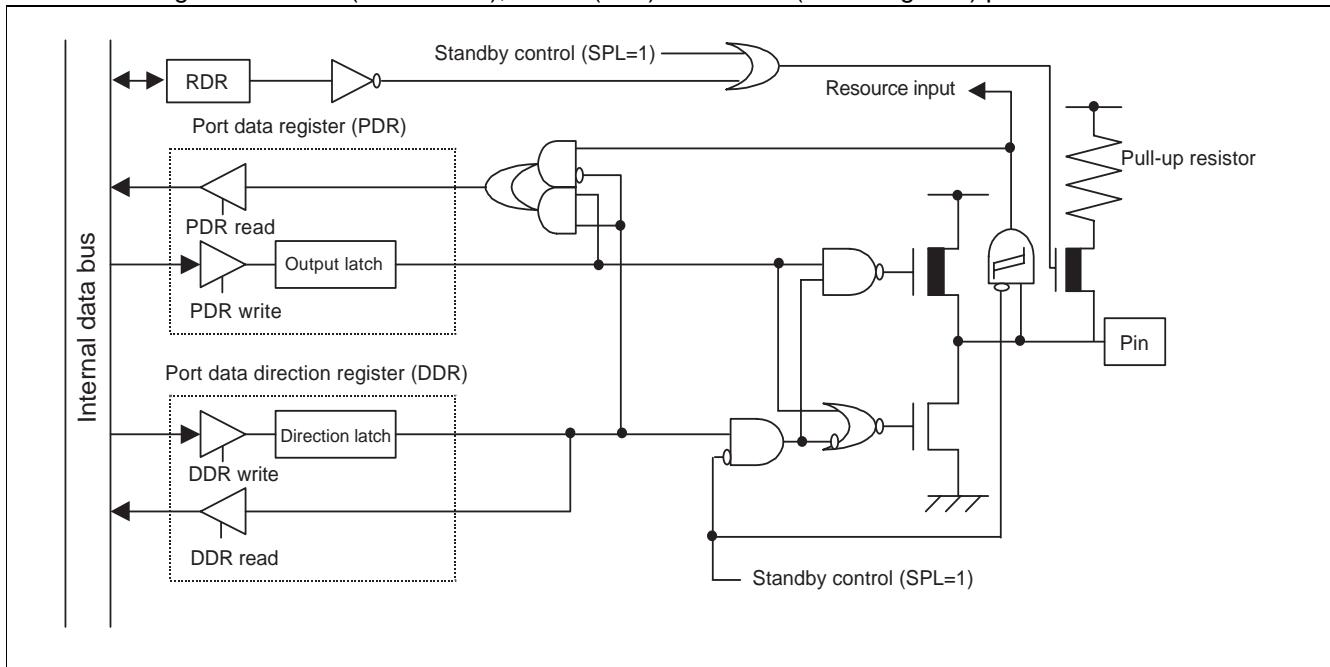


- Block diagram of Port 0 (P07) and Port 2 (P21) pins

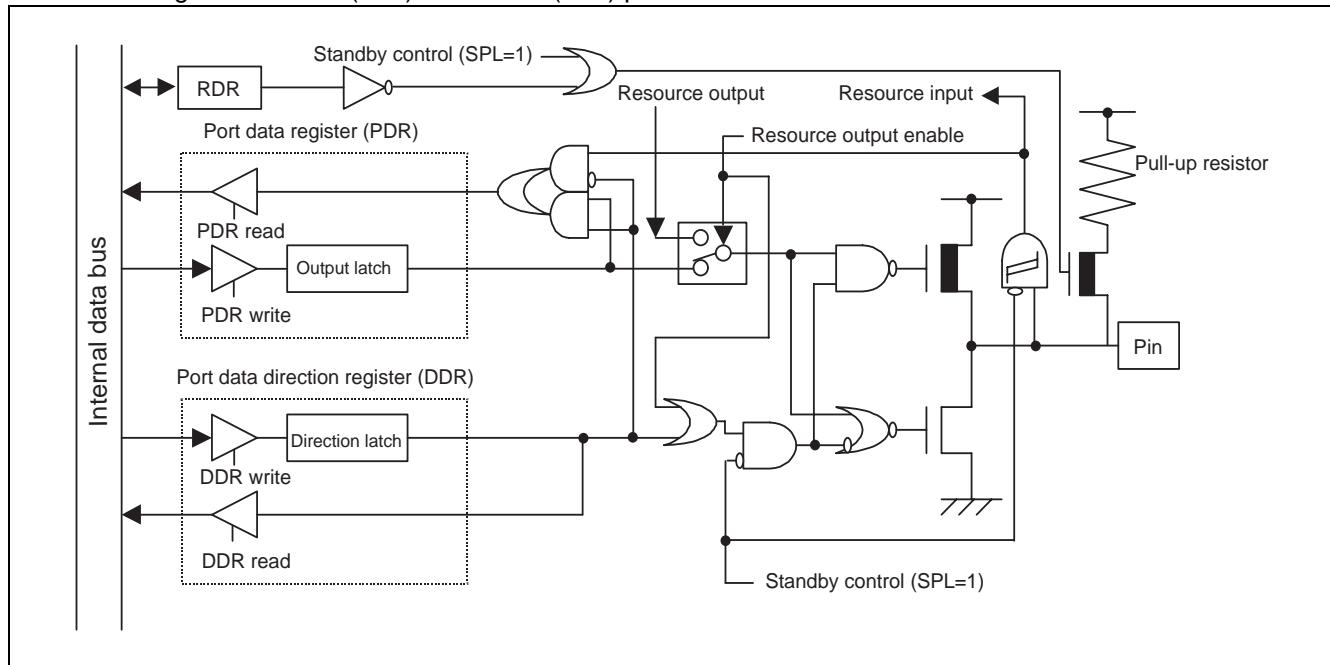


MB90820 Series


- Block diagram of Port 1 (P10 to P16) pins

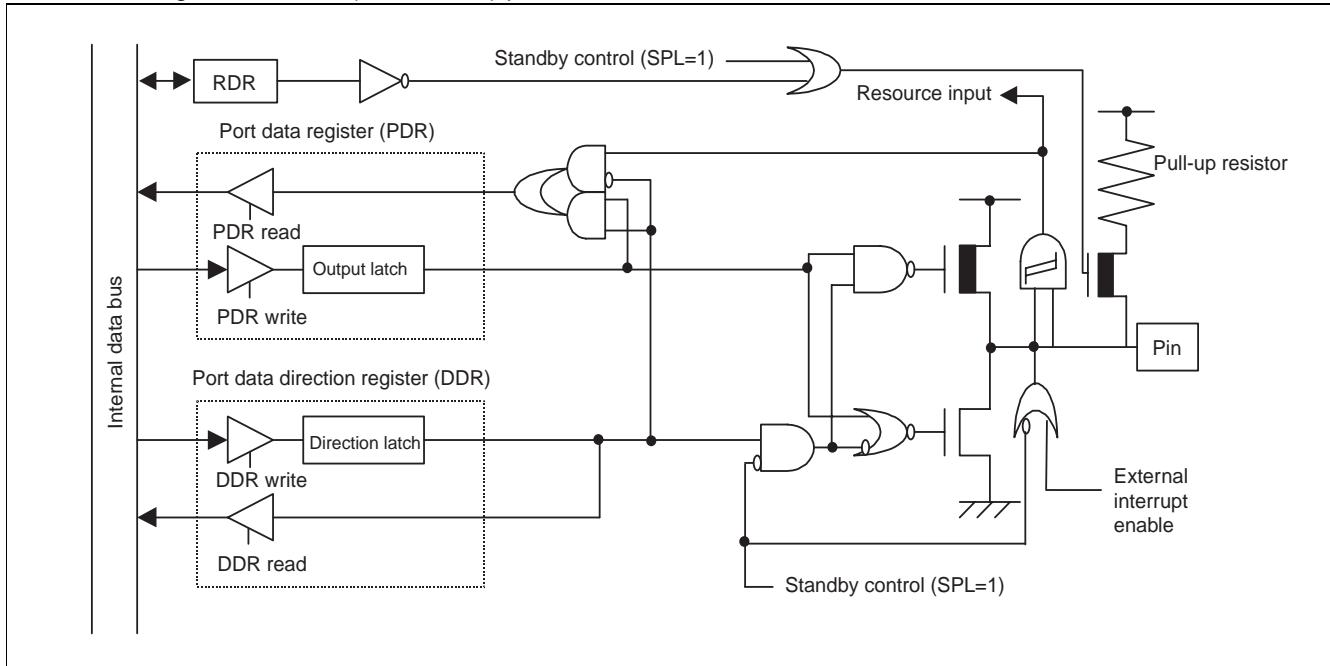


- Block diagram of Port 3 (excluding P37) pins

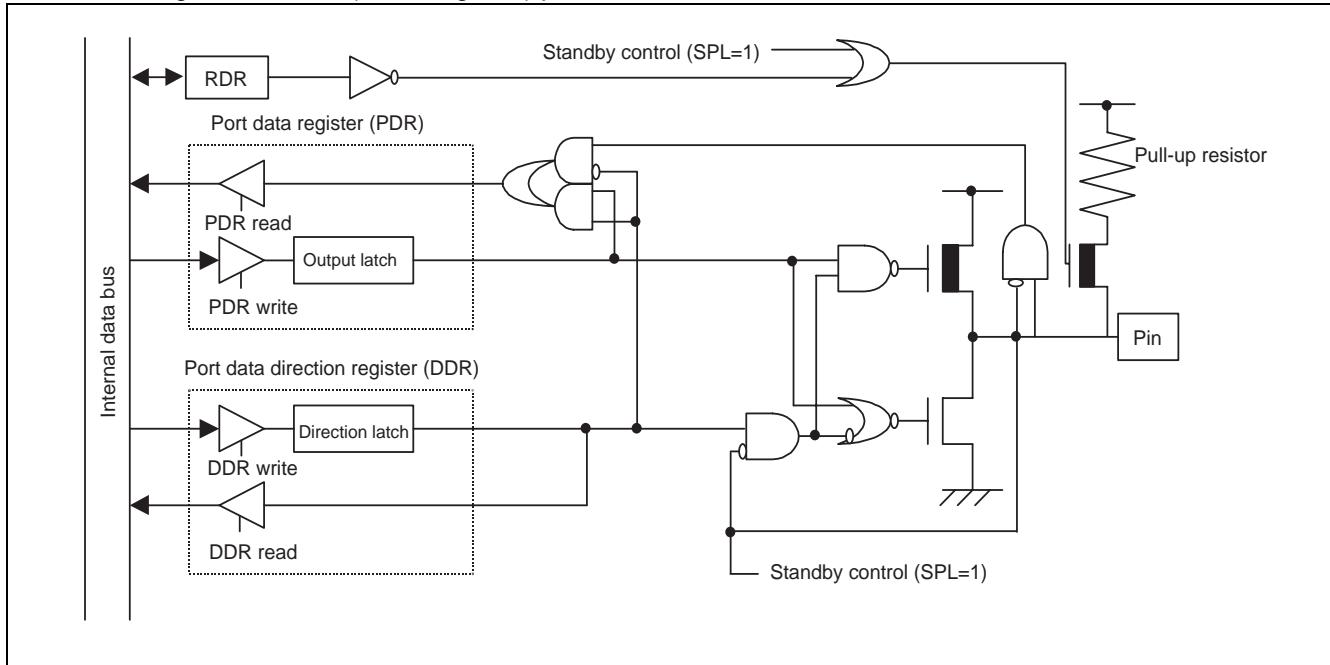

- Block diagram of Port 3 (P37) pin

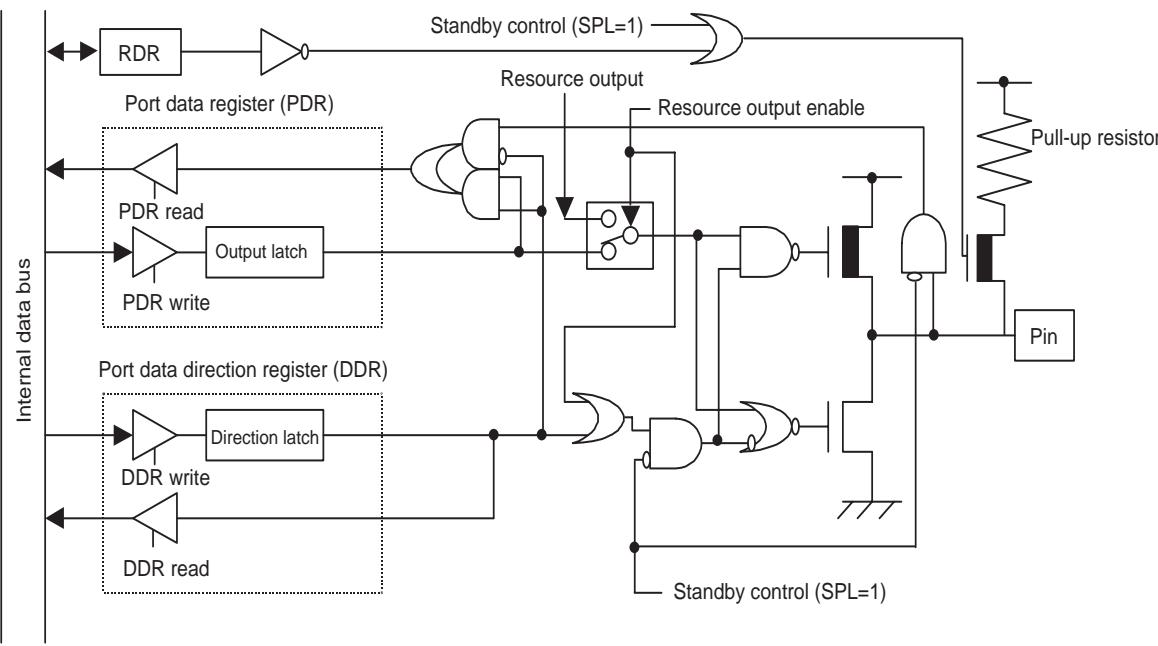


- Block diagram of Port 4 pins (excluding P41, P45 and P46) pins

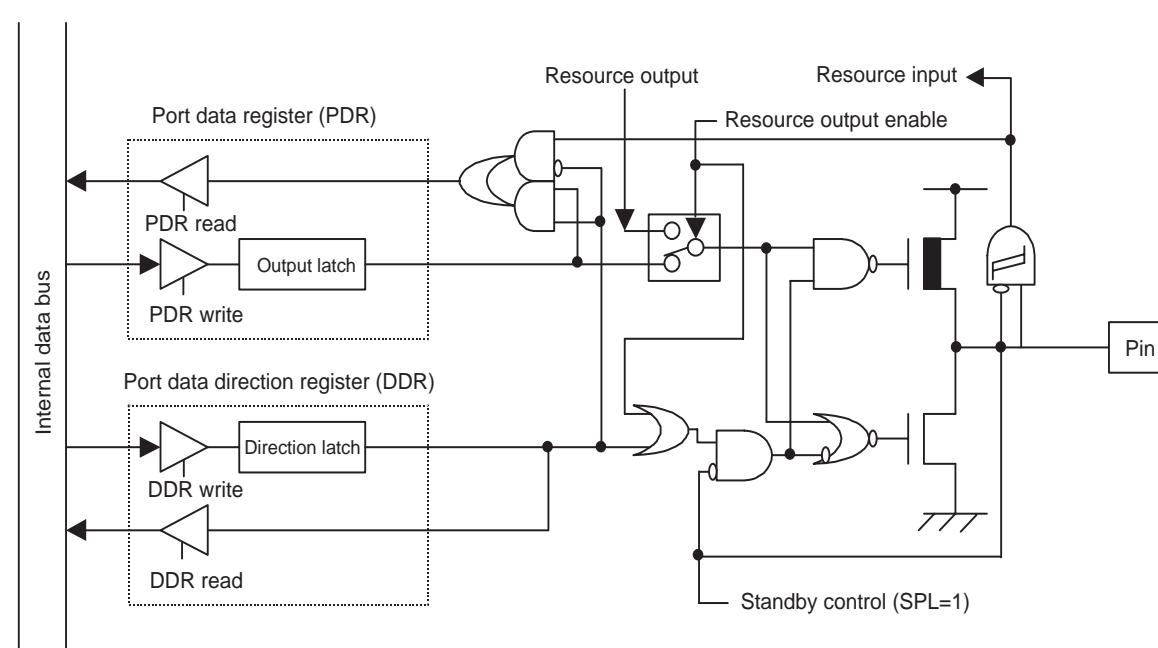


MB90820 Series


- Block diagram of Port 4 (P41 and P46) pins

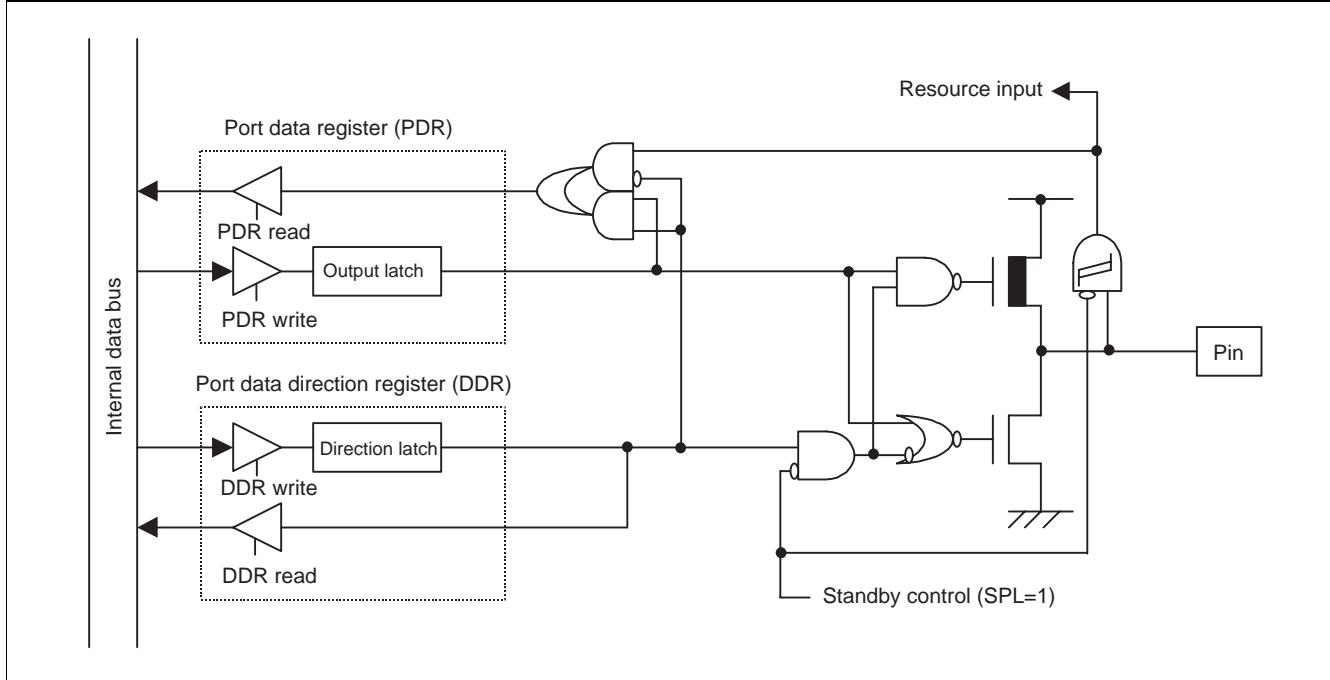


- Block diagram of P45 pin

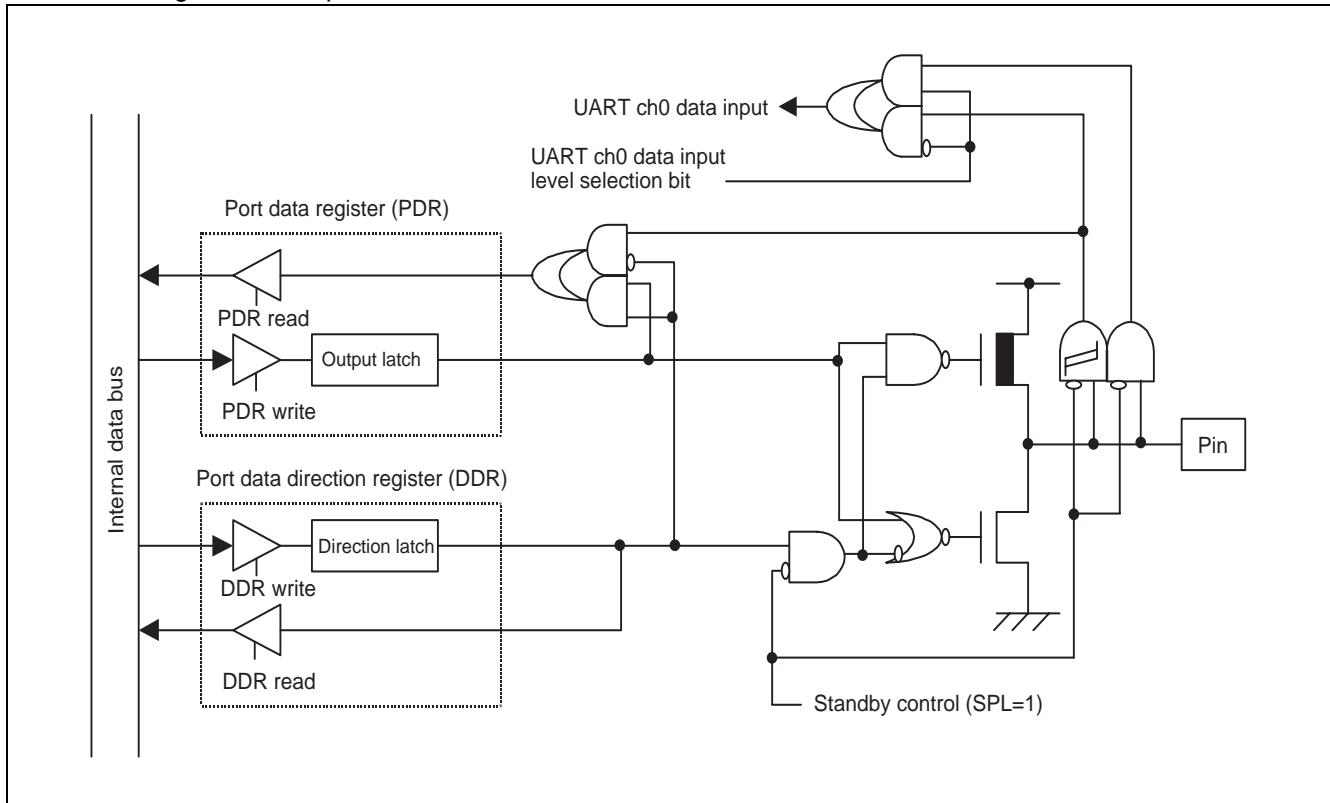

- Block diagram of Port 5 (P50) pin

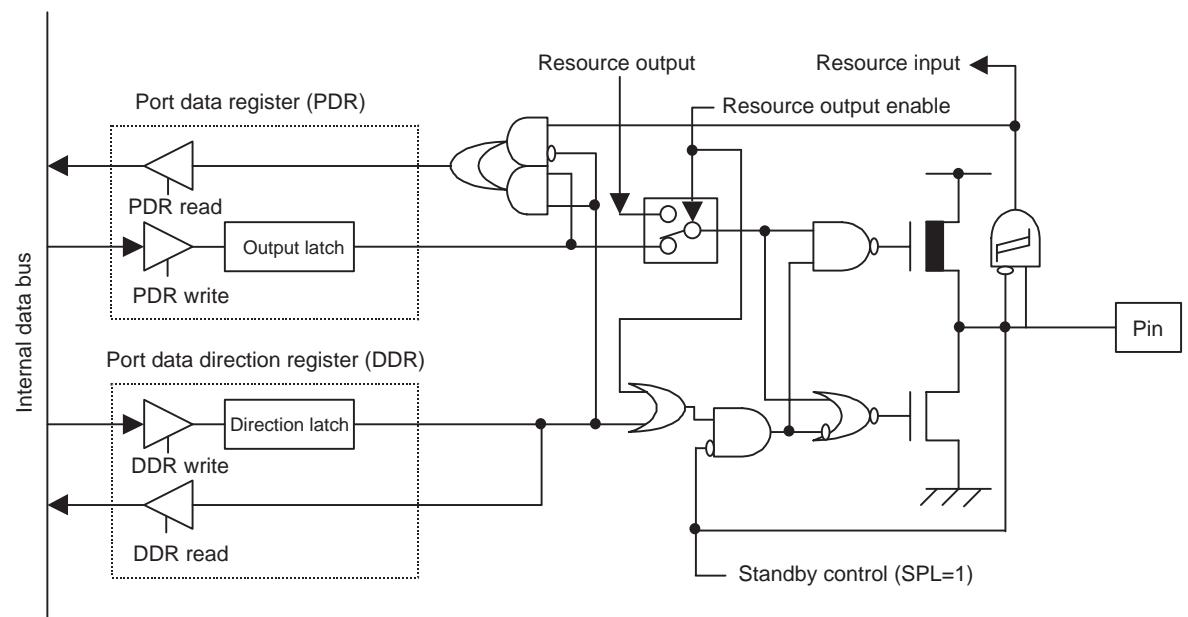


- Block diagram of Port 5 (P51) pin

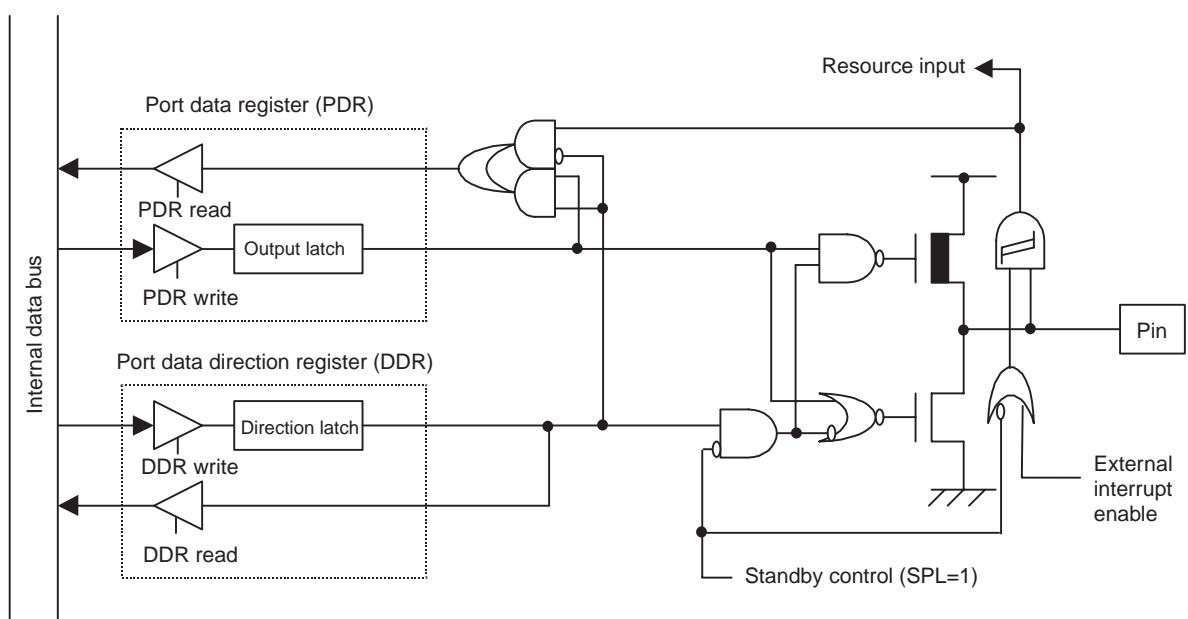


MB90820 Series


- Block diagram of Port 6 pins

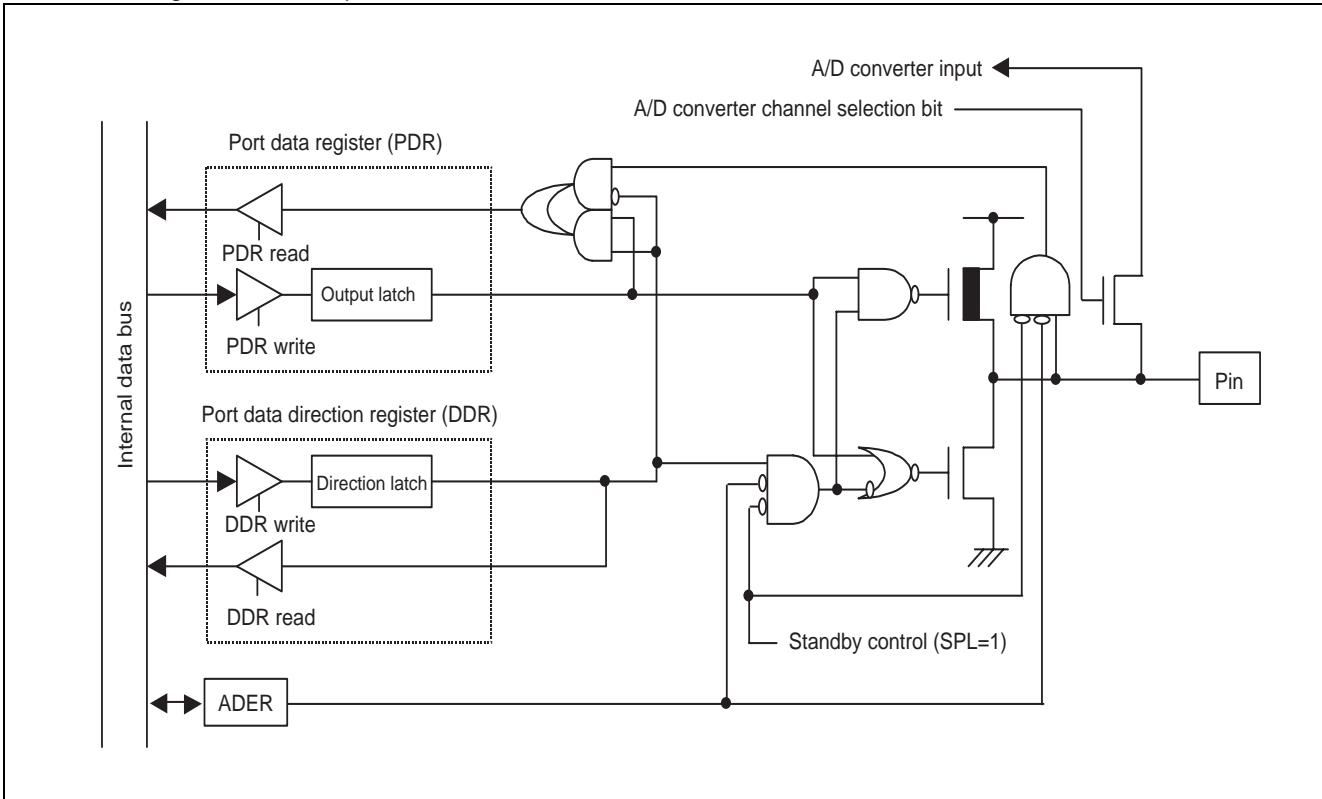


- Block diagram of Port 7 (P70 and P71) pins

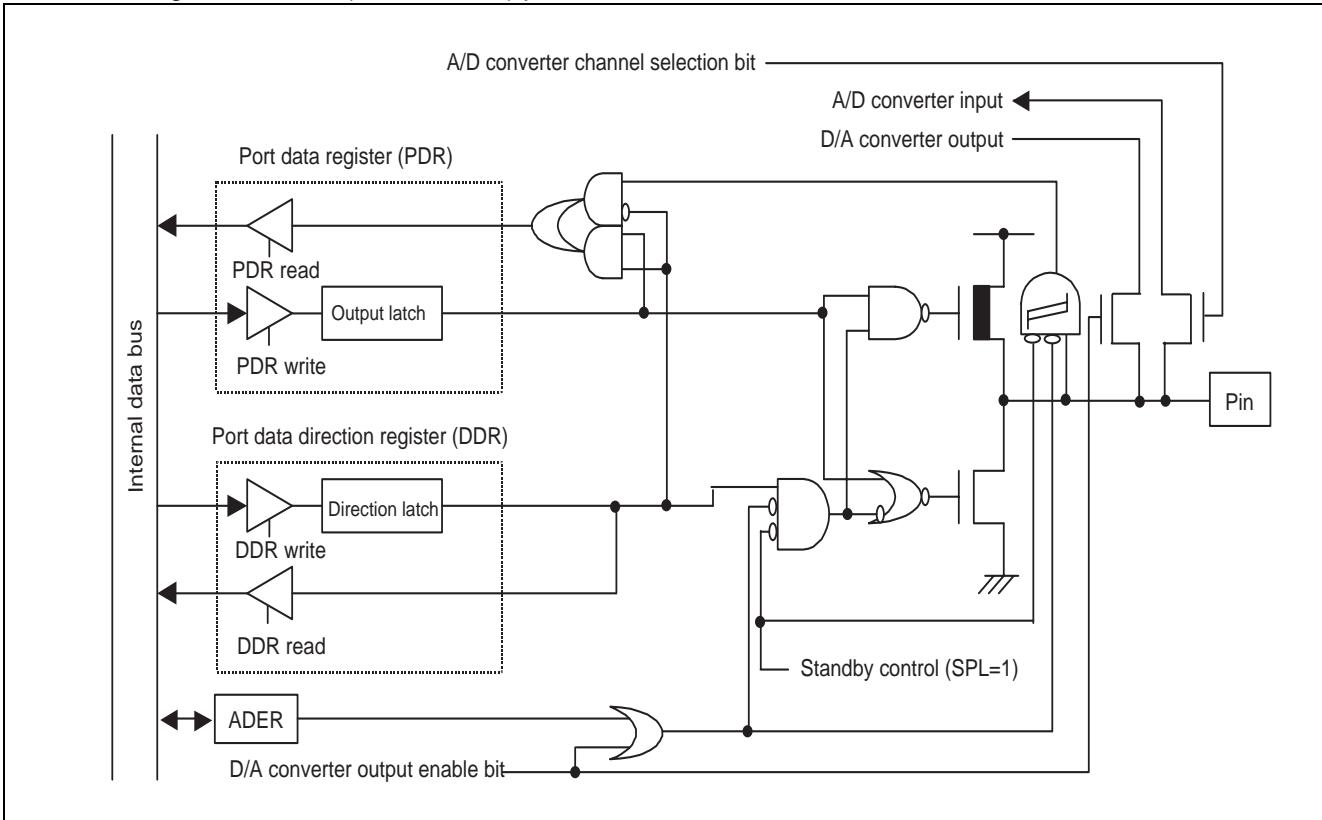

- Block diagram of P72 pin

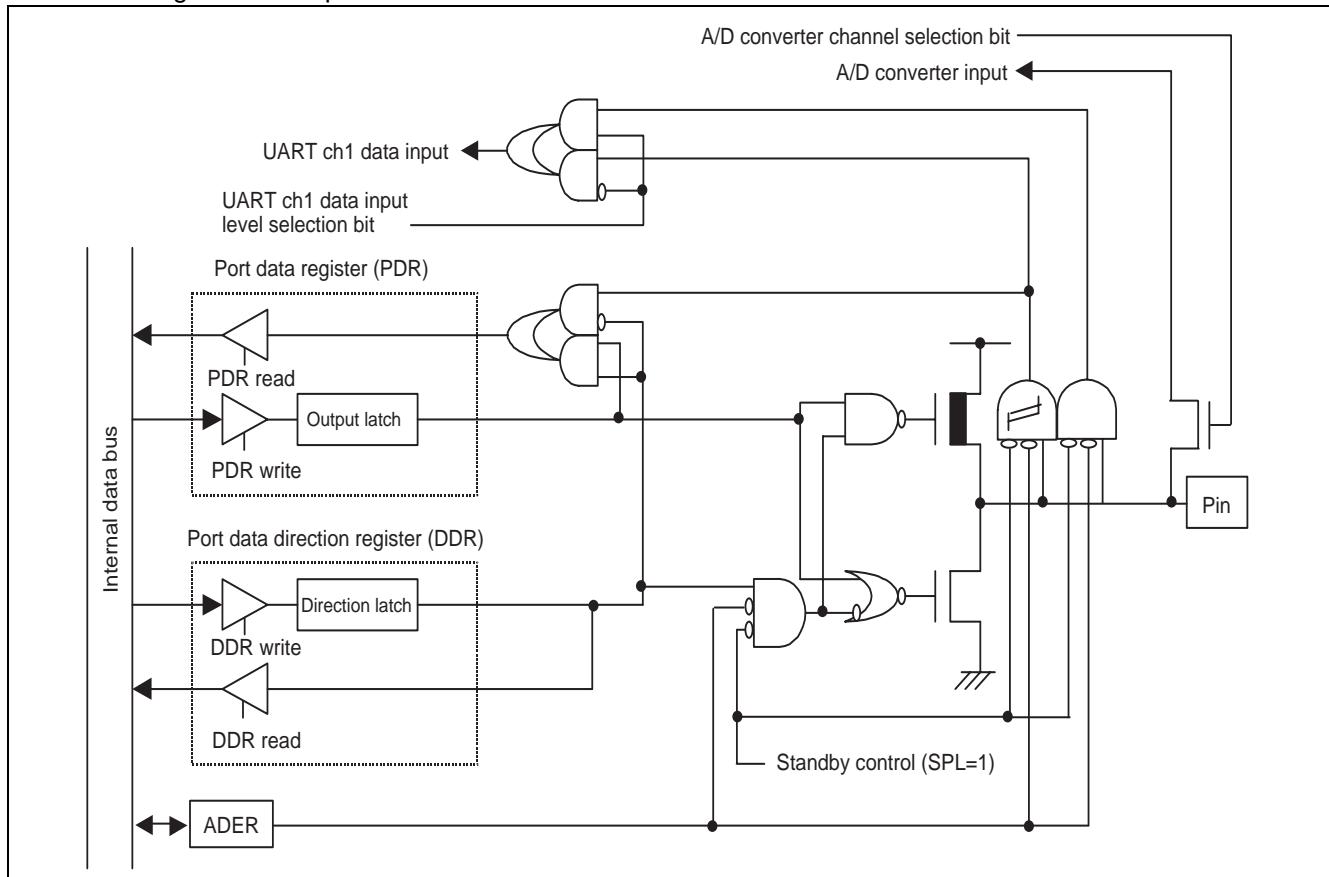


- Block diagram of Port 7(P73 and P74) pins

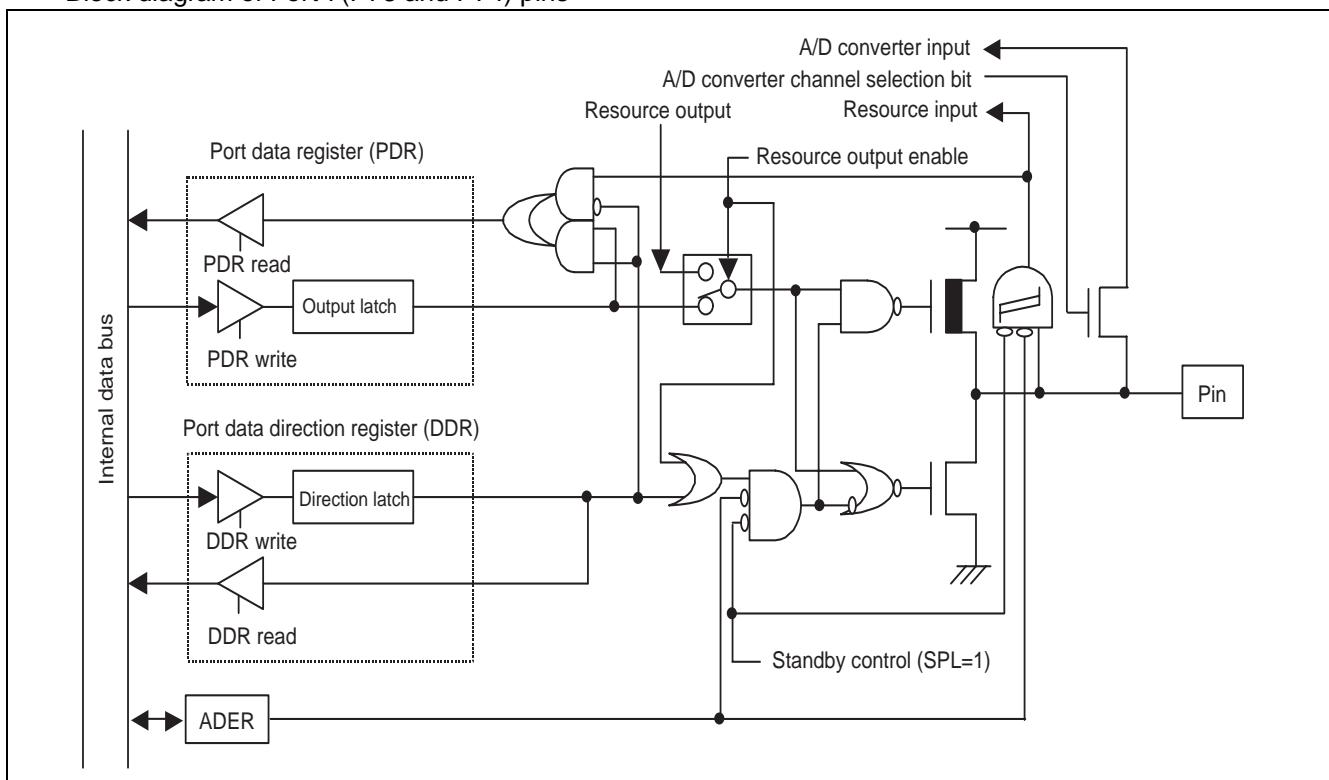


MB90820 Series


- Block diagram of Port 7 (P75 to P77) pins

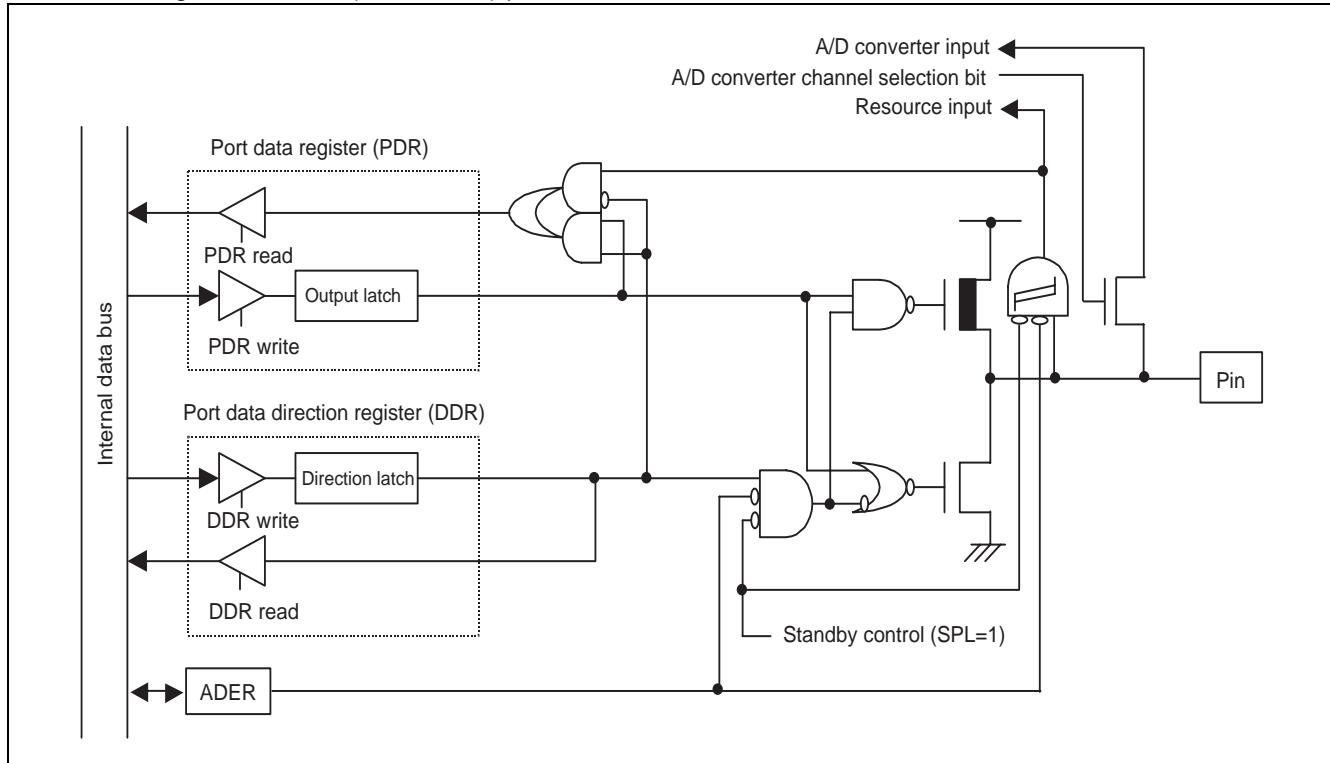

- Block diagram of Port 8 (P80 and P81) pins

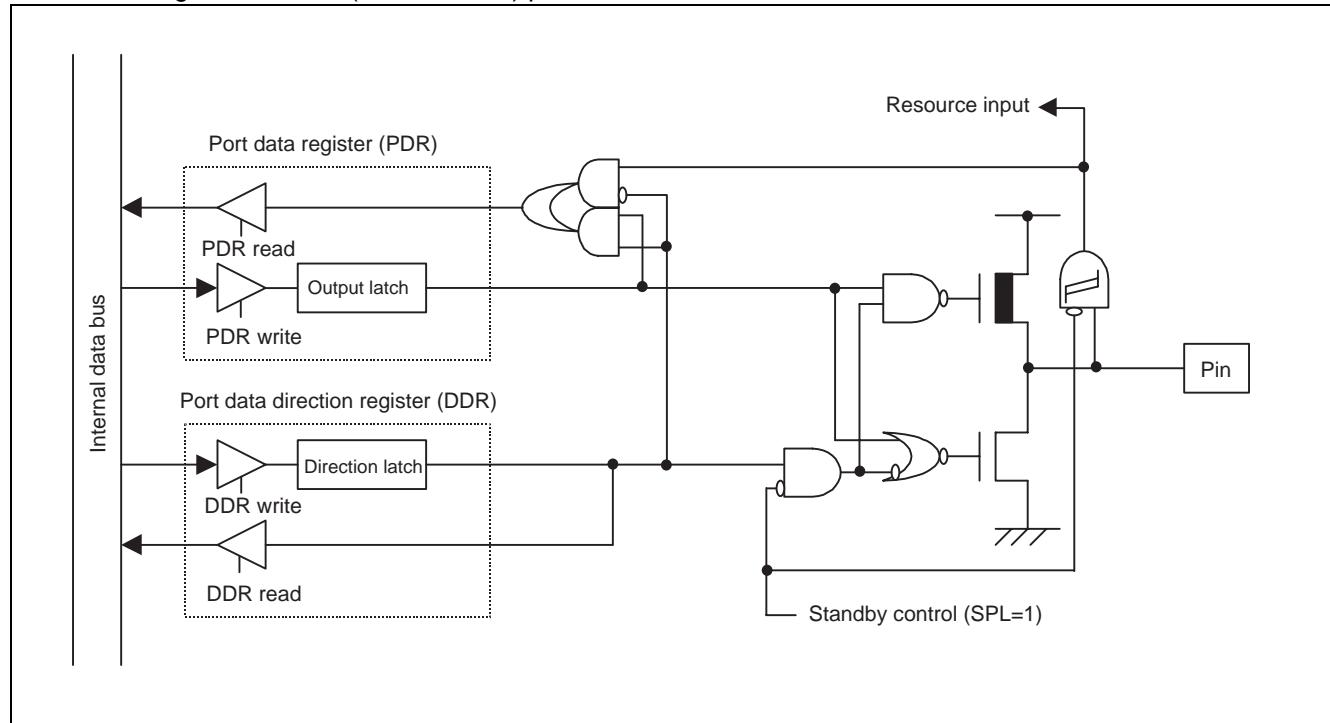

- Block diagram of Port 8 (P82 to P87) pins

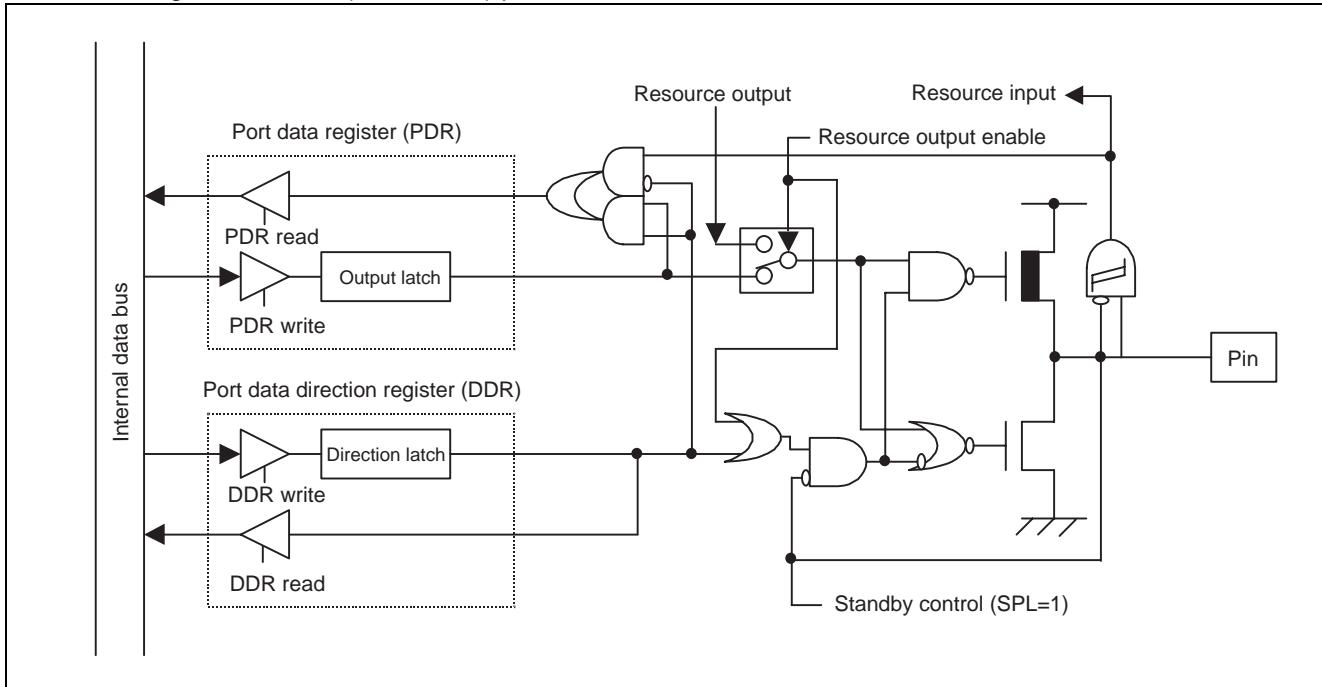

MB90820 Series

3. Timebase Timer

The timebase timer is an 18-bit free-running counter (timebase counter) that counts up in synchronization with the internal count clock (divided by 1/2 of oscillation clock).

Features of timebase timer :


- Generates the interruption at counter-overflow
- Supports for EI²OS
- Interval timer function:
Generates an interrupt at four different time intervals
- Clock supply function:
Four different clock can be selected as watchdog timer's count clock
Supply clock for oscillation stabilization

(1) Register configuration

Timebase Timer Control Register

	15	14	13	12	11	10	9	8	Bit number
Address: 0000A9H	Reserved	—	—	TBIE	TBOF	TBR	TBC1	TBC0	TBTC
Read/write	R/W	—	—	R/W	R/W	W	R/W	R/W	
Initial value	1	X	X	0	0	1	0	0	

(2) Block diagram

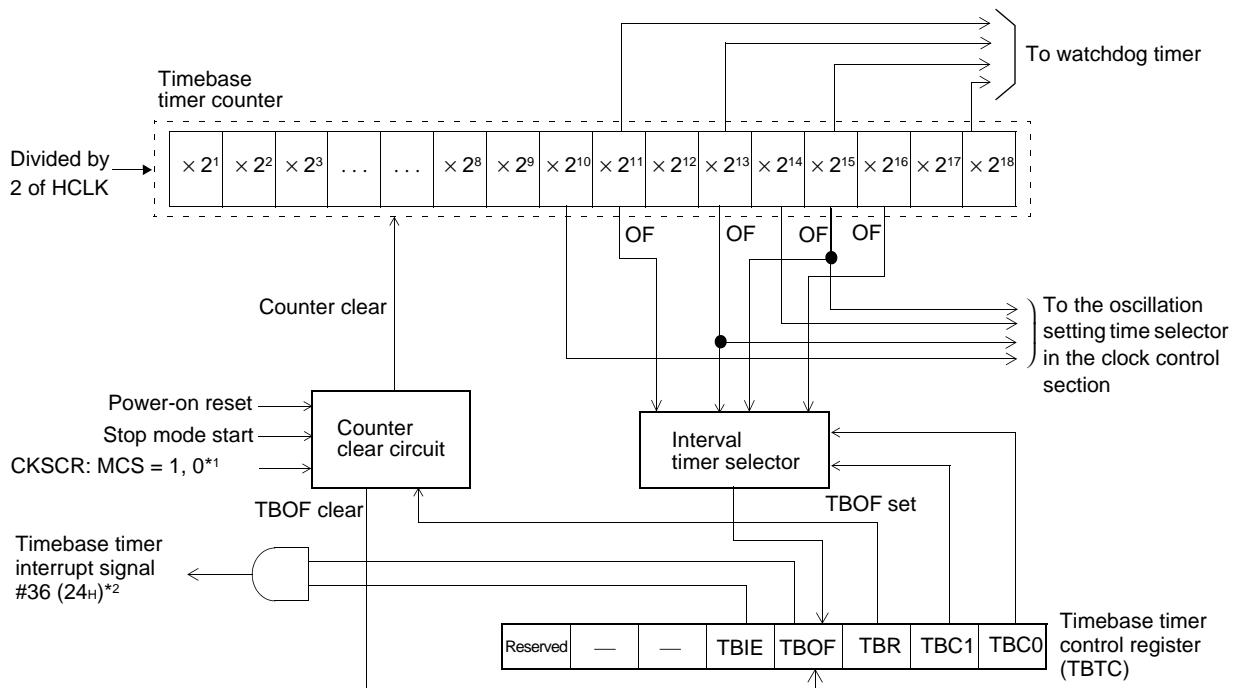

OF: Overflow

HCLK: Oscillation clock

*1: Switching of the machine clock from the oscillation clock to the PLL clock

*2: Interrupt number

4. Watchdog Timer

The watchdog timer is a 2-bit counter that uses the timebase timer's supply clock as the count clock. After activation, if the watchdog timer is not cleared within a given period, the CPU will be reset.

- Features of watchdog timer :

Reset CPU at four different time intervals


Indicate the reset causes by status bits

(1) Register configuration

Watchdog Timer Control Register

	7	6	5	4	3	2	1	0	Bit
Address: 0000A8H	PONR	-	WRST	ERST	SRST	WTE	WT1	WT0	WDTC
Read/write	R	-	R	R	R	W	W	W	
Initial value	X	X	X	X	X	1	1	1	

(2) Block diagram

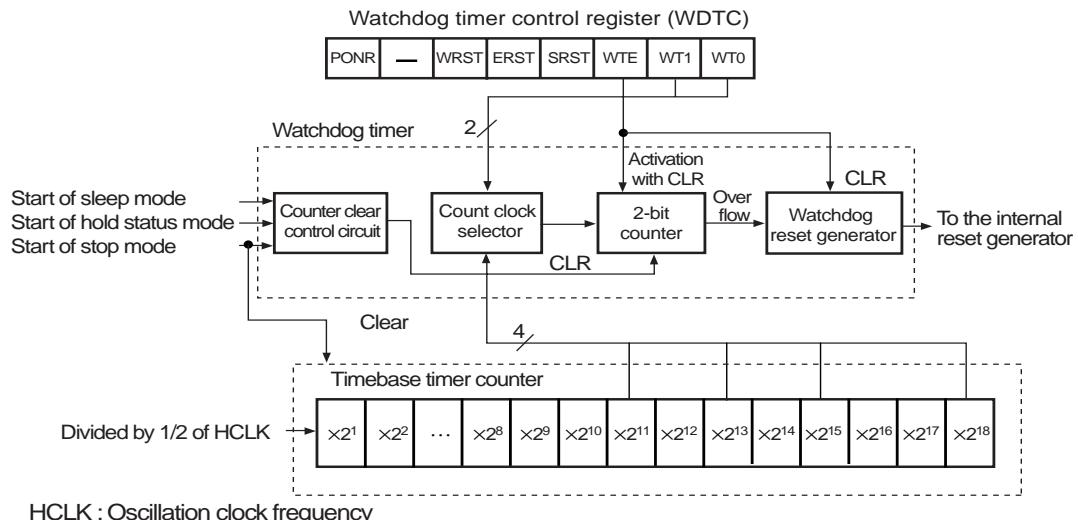

MB90820 Series

5. 16-bit reload timer ($\times 2$)

The 16-bit reload timer provides two operating mode, internal clock mode and event count mode. In each operating mode, the 16-bit down counter can be reloaded (reload mode) or stopped by underflow (one-shot mode).

Output pins TO1 and TO0 are able to output different waveform according to the counter operating mode. TO1 and TO0 toggles when counter underflows if counter is operated as reload mode. TO1 and TO0 output specified level (H or L) during counting if the counter is in one-shot mode.

Features of the 16-bit reload timer :

- Interrupt when timer underflows
- Supports for EI²OS
- Internal clock operating mode :

Three internal count clocks can be selected.

Counter can be activated by software or external trigger (signal at TIN1 and TIN0 pins).

Counter can be reloaded or stopped when underflow after activated.

- Event count operating mode :

Counter counts down one by one with specified edge at TIN1 and TIN0 pins.


Counter can be reloaded or stopped when underflow.

(1) Register configuration

16-bit Timer Register (Upper)/16-bit Reload Timer Register (Upper)									
15 14 13 12 11 10 9 8									Bit
Address: ch0 000085 _H ch1 000089 _H									TMR0, TMR1 / TMRD0, TMRD1
Read/write ⇡ R/W R/W R/W R/W R/W R/W R/W R/W R/W									
Initial value ⇡ X X X X X X X X X									
16-bit Timer Register (Lower)/16-bit Reload Timer Register (Lower)									
7 6 5 4 3 2 1 0									Bit
Address: ch0 000084 _H ch1 000088 _H									TMR0, TMR1 / TMRD0, TMRD1
Read/write ⇡ R/W R/W R/W R/W R/W R/W R/W R/W R/W									
Initial value ⇡ X X X X X X X X X									
Timer Control Status Register (Upper)									
15 14 13 12 11 10 9 8									Bit
Address: ch0 000083 _H ch1 000087 _H									TMCSR0H, TMCSR1H
Read/write ⇡ - - - R/W R/W R/W R/W R/W									
Initial value ⇡ X X X 1 0 0 0 0									
Timer Control Status Register (Lower)									
7 6 5 4 3 2 1 0									Bit
Address: ch0 000082 _H ch1 000086 _H									TMCSR0L, TMCSR1L
Read/write ⇡ R/W R/W R/W R/W R/W R/W R/W R/W R/W									
Initial value ⇡ 0 0 0 0 0 0 0 0 0									

Note : Registers TMR0, TMR1/TMRD0, TMRD1 are word access only.

(2) Block diagram

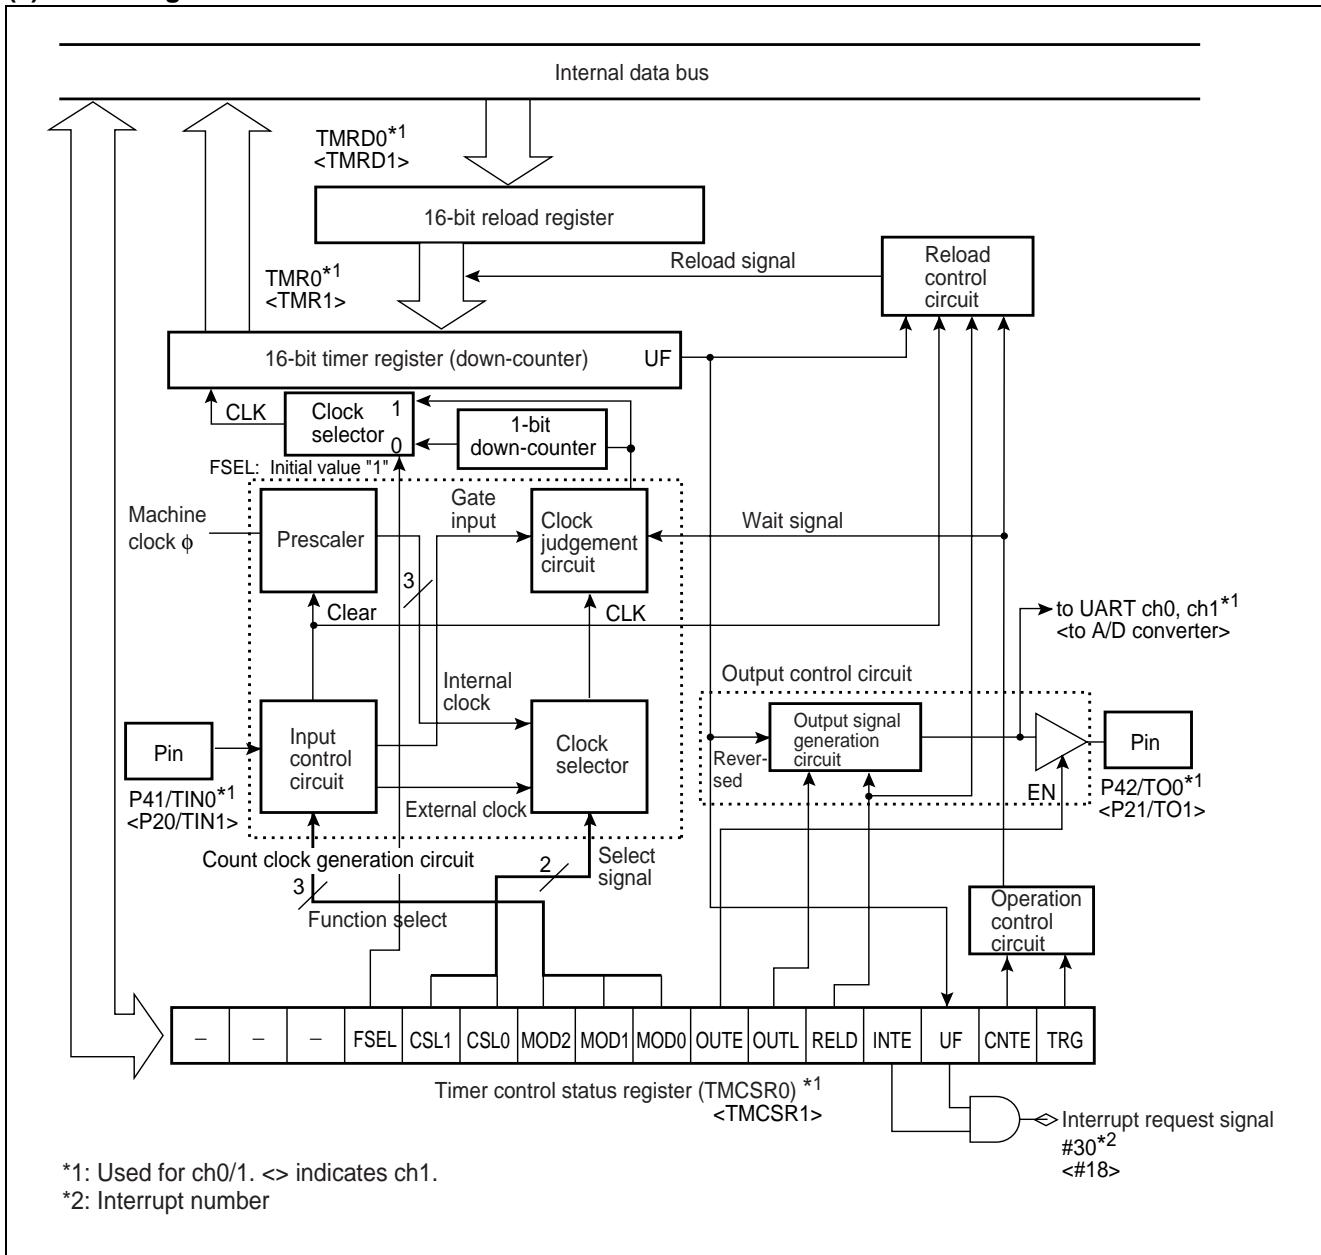

*1: Used for ch0/1. <> indicates ch1.

*2: Interrupt number

MB90820 Series






6. 16-bit PPG Timer ($\times 3$)

The 16-bit PPG timer consists of a 16-bit down counter, prescaler, 16-bit period setting register, 16-bit duty setting register, 16-bit control register and a PPG output pin. This module can be used to output pulses synchronized by software trigger or GATE signal from Multi-functional timer, refer to "7. Multi-functional Timer".

Features of 16-bit PPG timer :

- Two operating mode : PWM and One-shot mode
- 8 types of counter operation clock (ϕ , $\phi/2$, $\phi/4$, $\phi/8$, $\phi/16$, $\phi/32$, $\phi/64$, $\phi/128$) can be selected
- Interrupt is generated when trigger signal or counter borrow occurs, or when PPG output is changed
- Supports for EI²OS

(1) Register configuration

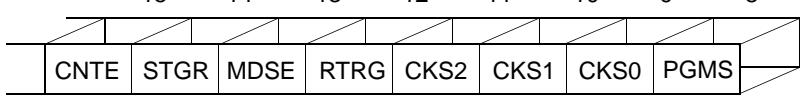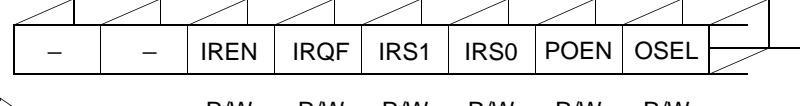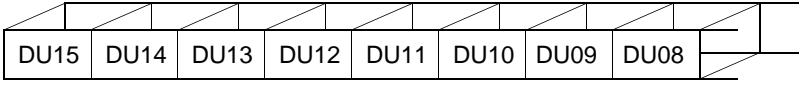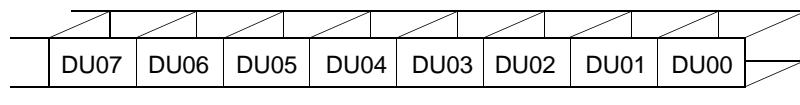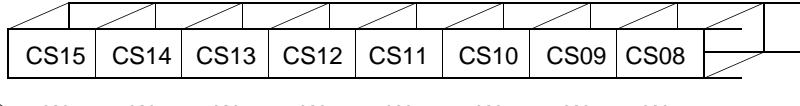PPG Control Status Register (Upper)									Bit
Address: ch0 00003F _H ch1 000047 _H ch2 00004F _H									PCNTH0 to PCNTH2
									
Read/write ⇡ R/W R/W R/W R/W R/W R/W R/W R/W									
Initial value ⇡ 0 0 0 0 0 0 0 0									
PPG Control Status Register (Lower)									Bit
Address: ch0 00003E _H ch1 000046 _H ch2 00004E _H									PCNTL0 to PCNTL2
									
Read/write ⇡ - - R/W R/W R/W R/W R/W R/W									
Initial value ⇡ X X 0 0 0 0 0 0									
PPG Duty Setting Register (Upper)									Bit
Address: ch0 00003D _H ch1 000045 _H ch2 00004D _H									PDUT0 to PDUT2
									
Read/write ⇡ W W W W W W W W									
Initial value ⇡ X X X X X X X X									
PPG Duty Setting Register (Lower)									Bit
Address: ch0 00003C _H ch1 000044 _H ch2 00004C _H									PDUT0 to PDUT2
									
Read/write ⇡ W W W W W W W W									
Initial value ⇡ X X X X X X X X									
PPG Period Setting Register (Upper)									Bit
Address: ch0 00003B _H ch1 000043 _H ch2 00004B _H									PCSR0 to PCSR2
									
Read/write ⇡ W W W W W W W W									
Initial value ⇡ X X X X X X X X									

(Continued)

(Continued)

PPG Period Setting Register (Lower)									Bit
Address: ch0 00003A _H									
ch1 000042 _H									
ch2 00004A _H									
									PCSR0 to PCSR2
Read/write ⇡	W	W	W	W	W	W	W	W	
Initial value ⇡	X	X	X	X	X	X	X	X	


PPG Down Counter Register (Upper)									Bit
Address: ch0 000039 _H									
ch1 000041 _H									
ch2 000049 _H									
									PDCR0 to PDCR2
Read/write ⇡	R	R	R	R	R	R	R	R	
Initial value ⇡	1	1	1	1	1	1	1	1	

PPG Down Counter Register (Lower)									Bit
Address: ch0 000038 _H									
ch1 000040 _H									
ch2 000048 _H									
									PDCR0 to PDCR2
Read/write ⇡	R	R	R	R	R	R	R	R	
Initial value ⇡	1	1	1	1	1	1	1	1	

Note : Registers PDCR0 to PDCR2, PCSR0 to PCSR2 and PDUT0 to PDUT2 are word access only.

MB90820 Series

(2) Block diagram

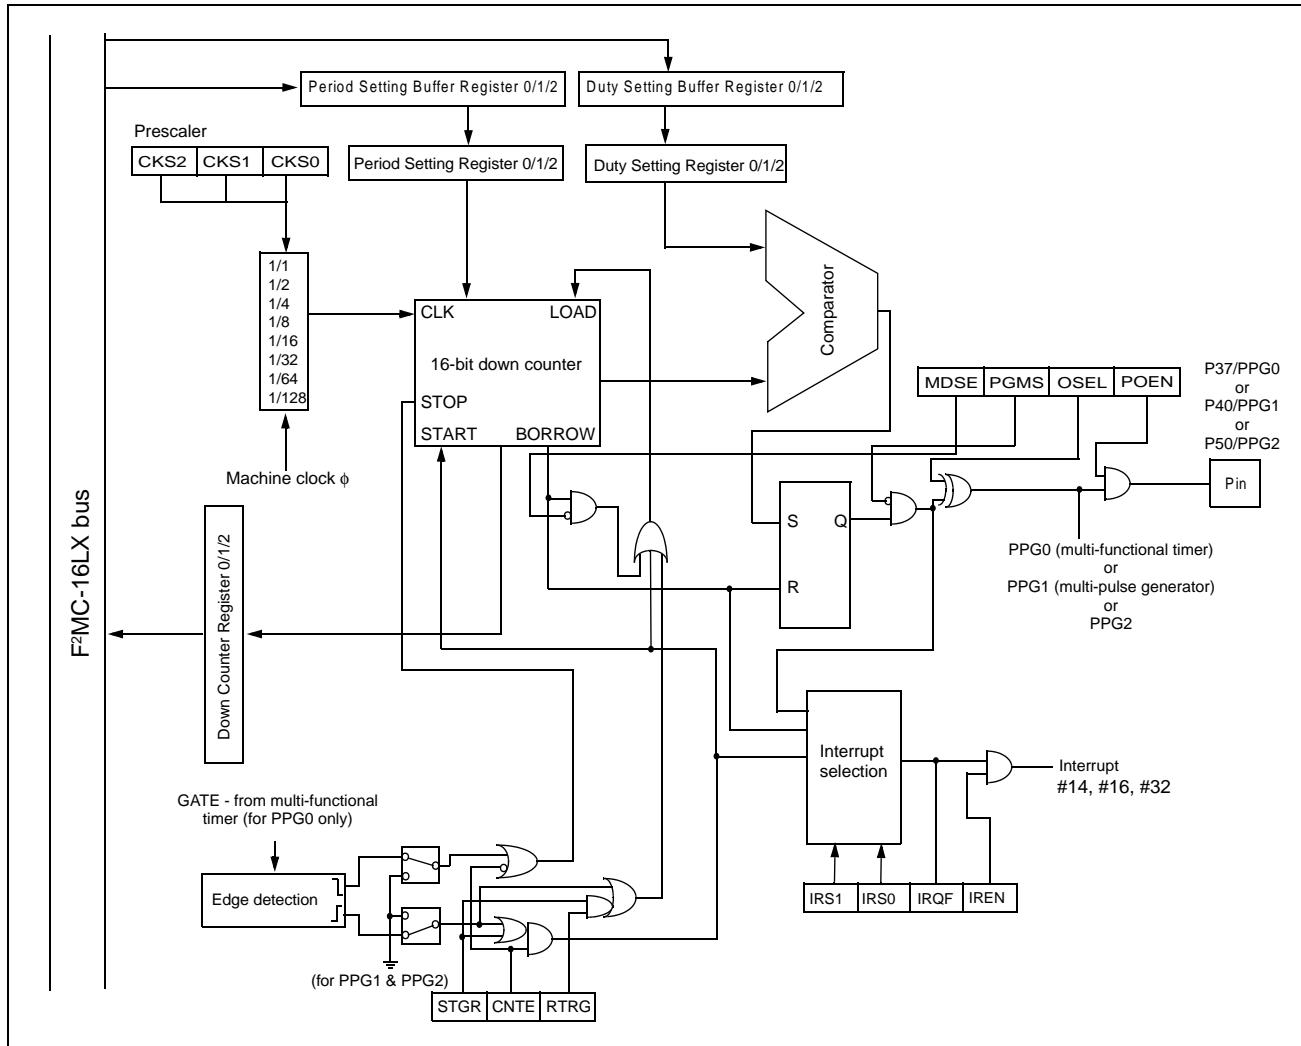

7. Multi-functional Timer

The 16-bit multi-functional timer module consists of one 16-bit free-running timer, four input capture circuits, six output comparators and one channel of 16-bit PPG timer. This module allows six independent waveforms generated by PPG timer or waveform generator to be outputted. With the 16-bit free-running timer and the input capture circuit, input pulse width and external clock period measurement can be done.

(1) 16-bit free-running timer (1 channel)

- The 16-bit free-running timer consists of a 16-bit up counter, 16-bit up-down counter, timer control status register, 16-bit compare clear register (with buffer register) and a prescaler.
- 8 types of counter operation clock (ϕ , $\phi/2$, $\phi/4$, $\phi/8$, $\phi/16$, $\phi/32$, $\phi/64$, $\phi/128$) can be selected. (ϕ is the machine clock.)
- Two types of interrupt causes :
 - Compare clear interrupt is generated when there is a comparing match with compare clear register and 16-bit free-running timer.
 - Zero detection interrupt is generated while 16-bit free-running timer is detected as zero in count value.
- EI²OS supported.
- Compare-clear register buffer provided :

The selectable buffer enables the 16-bit free-running timer update its compare-clear register automatically without stop the timer operation. User can read the next compare-clear value to the compare-clear register when the timer is running. The compare-clear register will be updated when the timer value is “0000_H”
- Reset, software clear, compare match with compare clear register in up-count mode will reset the counter value to “0000_H”.
- Supply clock to output compare module :

The prescaler output is acted as the count clock of the output compare.

(2) Output compare module (6 channels)

- The output compare module consists of six 16-bit output compare registers (with selectable buffer register), compare output latch and compare control registers. An interrupt is generated and output level is inverted when the value of 16-bit free-running timer and output compare register are matched.
- 6 output compare registers can be operated independently.
- Output pins and interrupt flag are corresponding to each output compare register.
- 2 output compare registers can be paired to control the output pins.
- Inverts output pins by using 2 output compare registers together.
- Setting the initial value for each output pin is possible.
- Interrupt is generated when there is a comparing match with output compare register and 16-bit free-running timer.
- EI²OS supported.

(3) Input capture module (4 channels)

Input capture consists of 4 independent external input pins, the corresponding input capture data register and input capture control status register. By detecting any edge of the input signal from the external pin, the value of the 16-bit free-running timer can be stored in the capture register and an interrupt is generated simultaneously.

- Operations synchronized with the 16-bit free-running timer's count clock.
- 3 types of trigger edge (rising edge, falling edge and both edge) of the external input signal can be selected and there is indication bit to show the trigger edge is rising or falling.
- 4 input captures can be operated independently.
- Two independent interrupts are generated when detecting a valid edge from external input.
- EI²OS supported.

MB90820 Series

(4) 16-bit PPG timer (1 channel)

The 16-bit PPG timer 0 is used to provide a PPG signal for waveform generator. (See section “6. 16-bit PPG Timer (x 3) ”.)

(5) Waveform generator module

The waveform generator consists of three 16-bit timer registers, three 16-bit timer control registers and a waveform control register.

With waveform generator, it is possible to generate real time output, 16-bit PPG waveform output, non-overlap 3-phase waveform output for inverter control and DC chopper waveform output.

- It is possible to generate a non-overlap waveform output based on dead-time of 16-bit timer. (Dead-time timer function)
- It is possible to generate a non-overlap waveform output when realtime output is operated in 2-channel mode. (Dead-time timer function)
- By detecting realtime output compare match, GATE signal of the PPG timer operation will be generated to start or stop PPG timer operation. (GATE function)
- When a match is detected by real time output compare, the 16-bit timer is activated. The PPG timer can be started or stopped easily by generating a GATE signal for PPG operation until the 16-bit timer stops. (GATE function)
- Force to stop output waveform using DTTI pin input.
- Interrupt is generated when DTTI active or 16-bit timer underflow.
- EI²OS is supported.

(6) Register configuration

- 16-bit free-running timer registers

Timer Control Status Register (Upper)								
	15	14	13	12	11	10	9	8
Address: 00005F _H	ECKE	IRQZF	IRQZE	MSI2	MSI1	MSI0	ICLR	ICRE
Read/write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Initial value	0	0	0	0	0	0	0	0
Timer Control Status Register (Lower)								
	7	6	5	4	3	2	1	0
Address: 00005E _H	-	BFE	STOP	MODE	SCLR	CLK2	CLK1	CLK0
Read/write	-	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Initial value	X	0	1	0	0	0	0	0
Timer Data Register (Upper)								
	15	14	13	12	11	10	9	8
Address: 00005D _H	T15	T14	T13	T12	T11	T10	T09	T08
Read/write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Initial value	0	0	0	0	0	0	0	0
Timer Data Register (Lower)								
	7	6	5	4	3	2	1	0
Address: 00005C _H	T07	T06	T05	T04	T03	T02	T01	T00
Read/write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
Initial value	0	0	0	0	0	0	0	0

(Continued)

(Continued)

Compare Clear Buffer Register / Compare Clear Register (Upper)

	15	14	13	12	11	10	9	8	Bit
Address:	00005B _H	CL15	CL14	CL13	CL12	CL11	CL10	CL09	CL08
Read/write	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	
Initial value	↔ 1	↔ 1	↔ 1	↔ 1	↔ 1	↔ 1	↔ 1	↔ 1	

Compare Clear Buffer Register / Compare Clear Register (Lower)

	7	6	5	4	3	2	1	0	Bit
Address:	00005A _H	CL07	CL06	CL05	CL04	CL03	CL02	CL01	CL00
Read/write	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	
Initial value	↔ 1	↔ 1	↔ 1	↔ 1	↔ 1	↔ 1	↔ 1	↔ 1	

Note : Registers TCDT, CPCLR/B/CPCLR are word access only.

- Output compare registers

Compare Control Register (Upper)

	15	14	13	12	11	10	9	8	Bit
Address:	ch1 00007D _H	-	BTS1	BTS0	CMOD	OTE1	OTE0	OTD1	OTD0
ch3 00007F _H									OCS1/3/5
ch5 000081 _H									
Read/write	↔ -	↔ R/W							
Initial value	↔ X	↔ 1	↔ 1	↔ 0	↔ 0	↔ 0	↔ 0	↔ 0	

Compare Control Register (Lower)

	7	6	5	4	3	2	1	0	Bit
Address:	ch0 00007C _H	IOP1	IOP0	IOE1	IOE0	BUF1	BUF0	CST1	CST0
ch2 00007E _H									OCS0/2/4
ch4 000080 _H									
Read/write	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	
Initial value	↔ 0	↔ 0	↔ 0	↔ 0	↔ 1	↔ 1	↔ 0	↔ 0	

Output Compare Buffer Register / Output Compare Register (Upper)

	15	14	13	12	11	10	9	8	Bit
Address:	ch0 000071 _H	OP15	OP14	OP13	OP12	OP11	OP10	OP09	OP08
ch1 000073 _H									OCCPB0 to OCCPB5/
ch2 000075 _H									OCCP0 to OCCP5
ch3 000077 _H									
ch4 000079 _H									
ch5 00007B _H									
Read/write	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	
Initial value	↔ X	↔ X	↔ X	↔ X	↔ X	↔ X	↔ X	↔ X	

Output Compare Buffer Register / Output Compare Register (Lower)

	7	6	5	4	3	2	1	0	Bit
Address:	ch0 000070 _H	OP07	OP06	OP05	OP04	OP03	OP02	OP01	OP00
ch1 000072 _H									OCCPB0 to OCCPB5/
ch2 000074 _H									OCCP0 to OCCP5
ch3 000076 _H									
ch4 000078 _H									
ch5 00007A _H									
Read/write	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	↔ R/W	
Initial value	↔ X	↔ X	↔ X	↔ X	↔ X	↔ X	↔ X	↔ X	

Note : Register OCCPB0 to OCCPB5 and OCCP0 to OCCP5 are word access only.

MB90820 Series

- Input capture registers

Input Capture Control Status Register (2/3) (Upper)

	15	14	13	12	11	10	9	8	Bit
Address:	00006B _H	—	—	—	—	—	IEI3	IEI2	ICSH23
Read/write	—	—	—	—	—	—	R	R	
Initial value	X	X	X	X	X	X	0	0	

Input Capture Control Status Register (2/3) (Lower)

	7	6	5	4	3	2	1	0	Bit	
Address:	00006A _H	ICP3	ICP2	ICE3	ICE2	EG31	EG30	EG21	EG20	ICSL23
Read/write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W		
Initial value	0	0	0	0	0	0	0	0		

PPG output control/ Input Capture Control Status Register (0/1) (Upper)

	15	14	13	12	11	10	9	8	Bit	
Address:	000069 _H	PGEN5	PGEN4	PGEN3	PGEN2	PGEN1	PGEN0	IEI1	IEI0	PICSH01
Read/write	R/W	R/W	R/W	R/W	R/W	R/W	R	R		
Initial value	0	0	0	0	0	0	0	0		

Input Capture Control Status Register (0/1) (Lower)

	7	6	5	4	3	2	1	0	Bit	
Address:	000068 _H	ICP1	ICP0	ICE1	ICE0	EG11	EG10	EG01	EG00	PICSL01
Read/write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W		
Initial value	0	0	0	0	0	0	0	0		

Input Capture Data Register (Upper)

	15	14	13	12	11	10	9	8	Bit	
Address:	ch0 000061 _H	CP15	CP14	CP13	CP12	CP11	CP10	CP09	CP08	IPCP0 to IPCP3
ch1 000063 _H										
ch2 000065 _H										
ch3 000067 _H										
Read/write	R	R	R	R	R	R	R	R		
Initial value	X	X	X	X	X	X	X	X		

Input Capture Data Register (Lower)

	7	6	5	4	3	2	1	0	Bit	
Address:	ch0 000060 _H	CP07	CP06	CP05	CP04	CP03	CP02	CP01	CP00	IPCP0 to IPCP3
ch1 000062 _H										
ch2 000064 _H										
ch3 000066 _H										
Read/write	R	R	R	R	R	R	R	R		
Initial value	X	X	X	X	X	X	X	X		

Note : Registers IPCP0 to IPCP3 are word access only.

- Waveform generator registers

Waveform Control Register

	15	14	13	12	11	10	9	8	Bit
Address:	000059H	DTIE	DTIF	NRSL	DCK2	DCK1	DCK0	NWS1	NWS0
Read/write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
Initial value	0	0	0	0	0	0	0	0	

16-bit Timer Control Register

	7	6	5	4	3	2	1	0	Bit
Address:	ch0 000056H	DMOD	GTEN1	GTENO	TMIF	TMIE	TMD2	TMD1	TMD0
ch2 000058H									
Read/write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
Initial value	0	0	0	0	0	0	0	0	

16-bit Timer Control Register

	15	14	13	12	11	10	9	8	Bit
Address:	ch1 000057H	DMOD	GTEN1	GTENO	TMIF	TMIE	TMD2	TMD1	TMD0
Read/write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
Initial value	0	0	0	0	0	0	0	0	

16-bit Timer Register (Upper)

	15	14	13	12	11	10	9	8	Bit
Address:	ch0 000051H	TR15	TR14	TR13	TR12	TR11	TR10	TR09	TR08
ch1 000053H									
ch2 000055H									
Read/write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
Initial value	X	X	X	X	X	X	X	X	


16-bit Timer Register (Lower)

	7	6	5	4	3	2	1	0	Bit
Address:	ch0 000050H	TR07	TR06	TR05	TR04	TR03	TR02	TR01	TR00
ch1 000052H									
ch2 000054H									
Read/write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
Initial value	X	X	X	X	X	X	X	X	

Note : Registers TMRR0 to TMRR2 are word access only.

MB90820 Series

- MCU to 3-phase Motor Interface Circuit


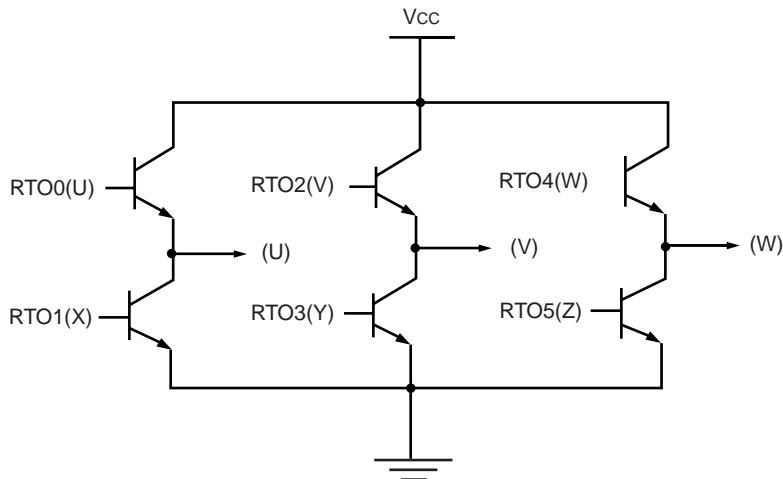


RTO0 (U) , RTO2 (V) , RTO4 (W) are called “UPPER ARM”.
RTO1 (X) , RTO3 (Y) , RTO5 (Z) are called “LOWER ARM”.

RTO0 (U) and RTO1 (X) are called “non-overlapping output pair”.
RTO2 (V) and RTO3 (Y) are called “non-overlapping output pair”.
RTO4 (W) and RTO5 (Z) are called “non-overlapping output pair”.


(U) , (V) , (W) are the 3-phase coil connection.

- 3-phase Motor Coil Connection Circuit

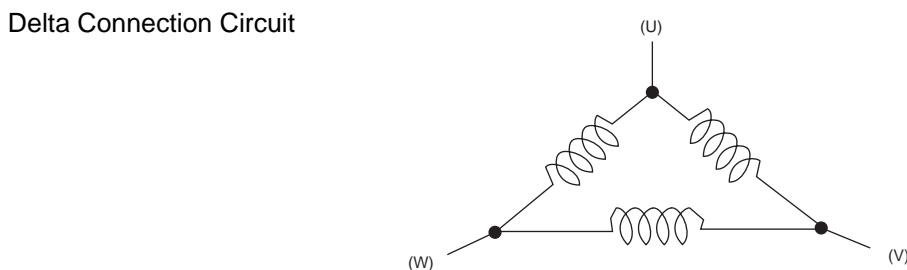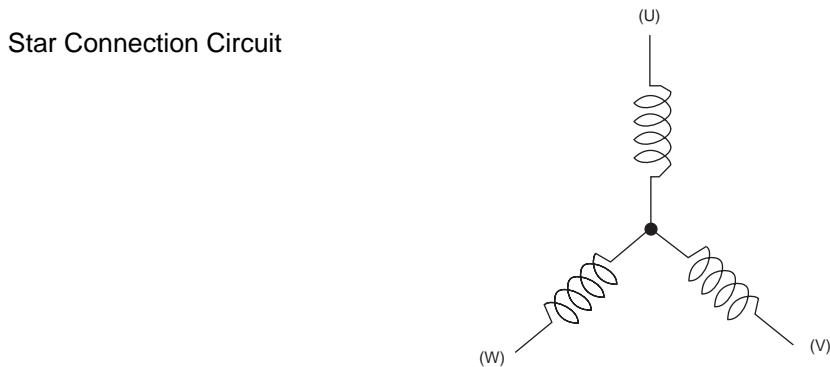

(7) Block diagram


- Block diagram of Multi-functional timer

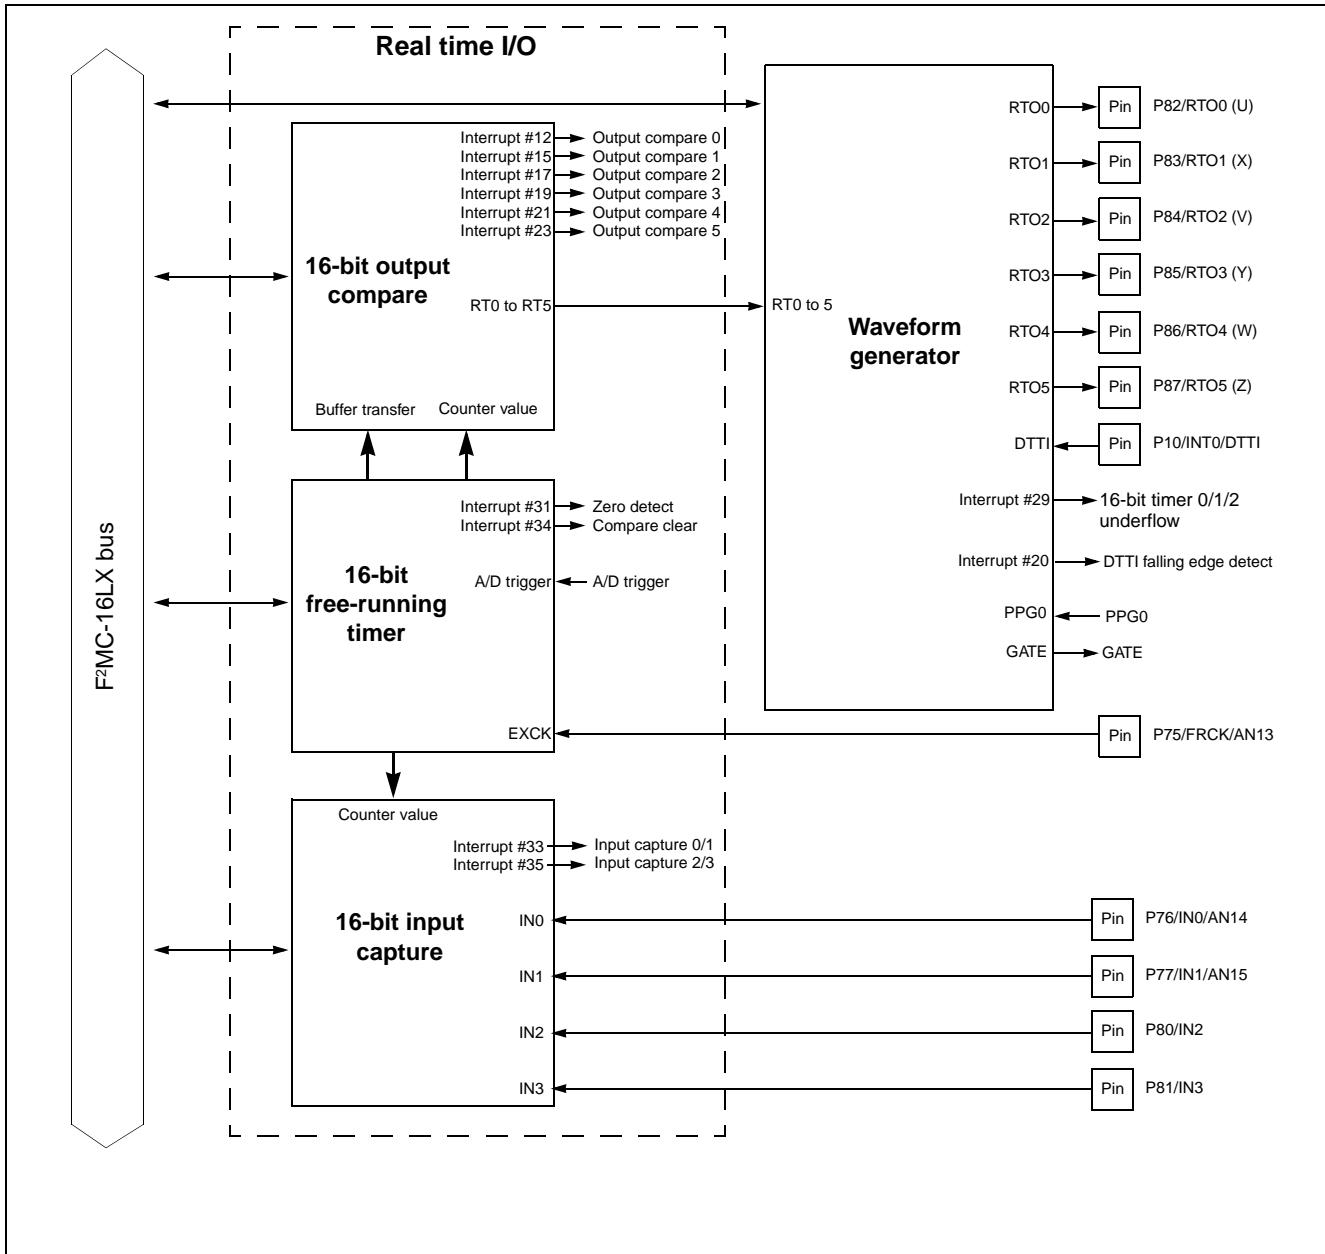


Interrupt #12	Output compare 0	Interrupt #31	Zero detect
Interrupt #15	Output compare 1	Interrupt #34	Compare clear
Interrupt #17	Output compare 2	Interrupt #33	input compare 0/1
Interrupt #19	Output compare 3	Interrupt #35	input compare 2/3
Interrupt #21	Output compare 4		
Interrupt #23	Output compare 5		

MB90820 Series


- Block diagram of 16-bit free-running timer

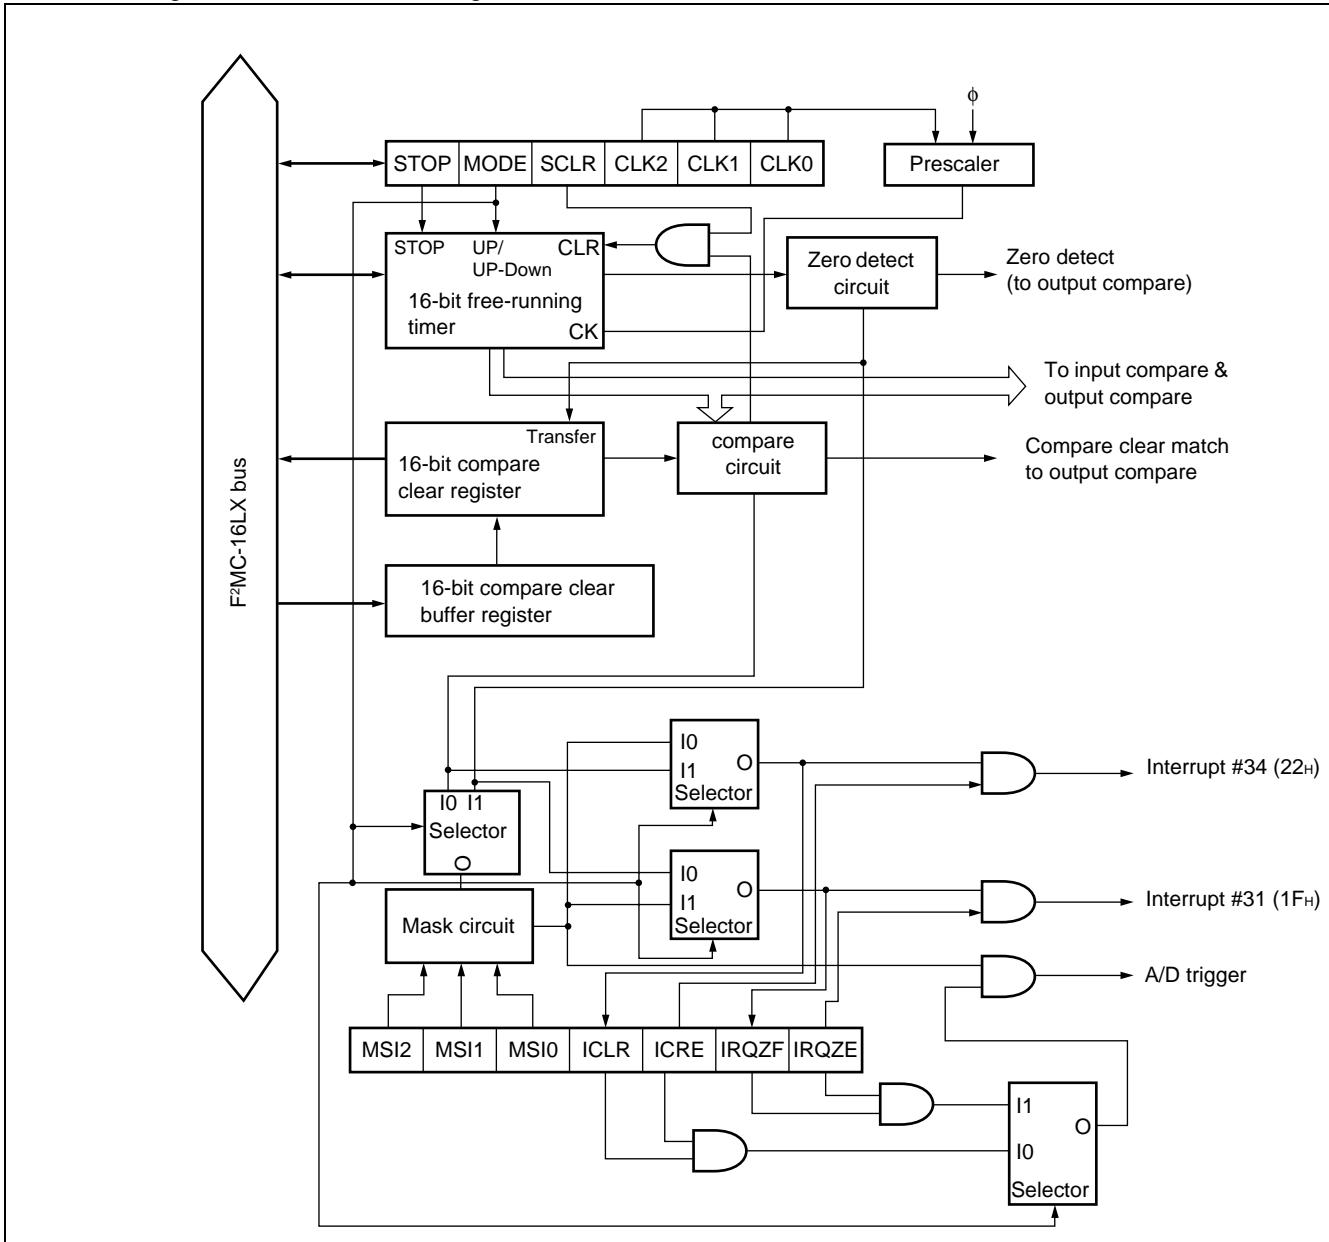

- Block diagram of 16-bit output compare

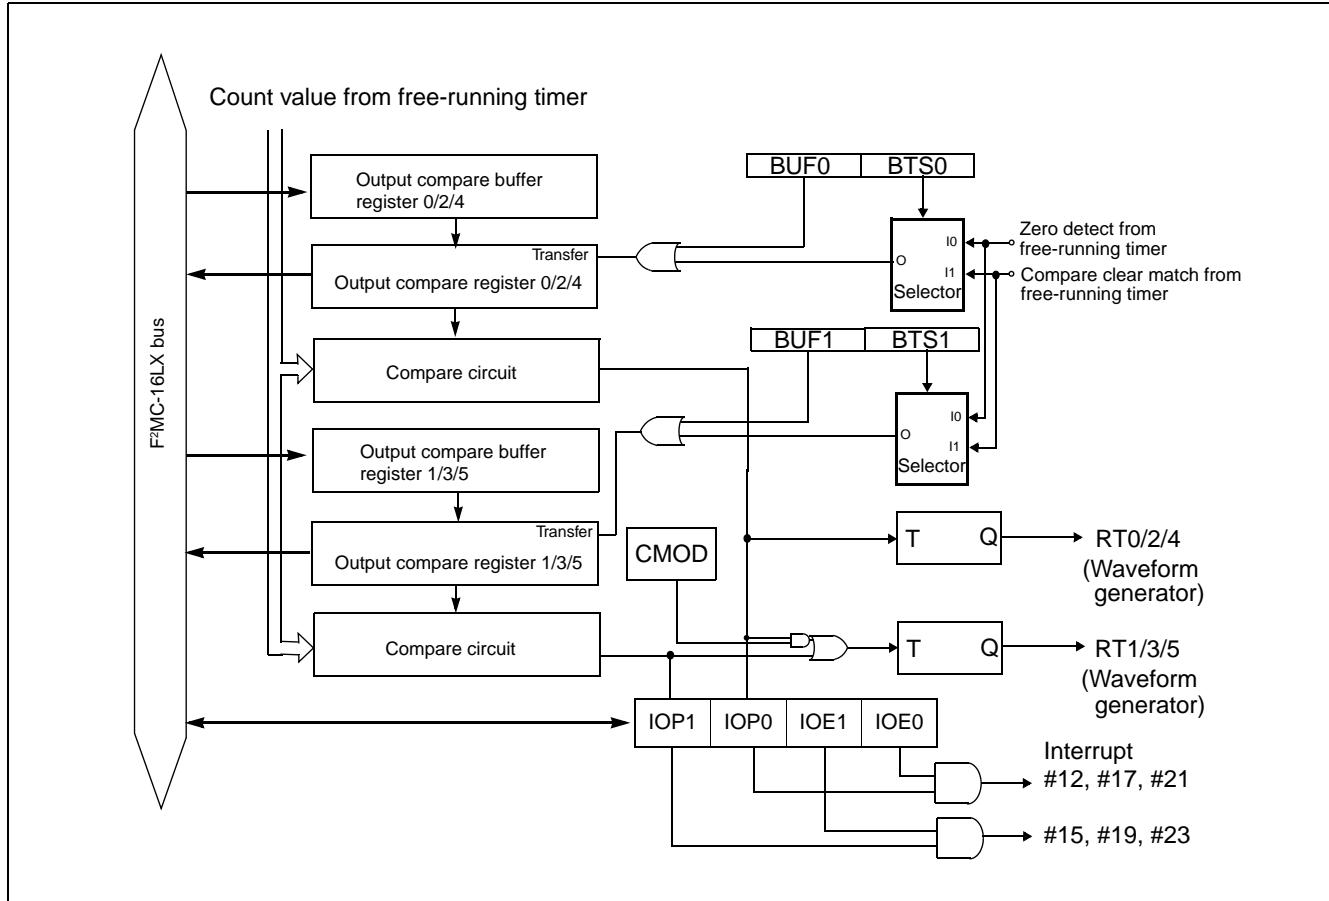


- Block diagram of 16-bit input capture

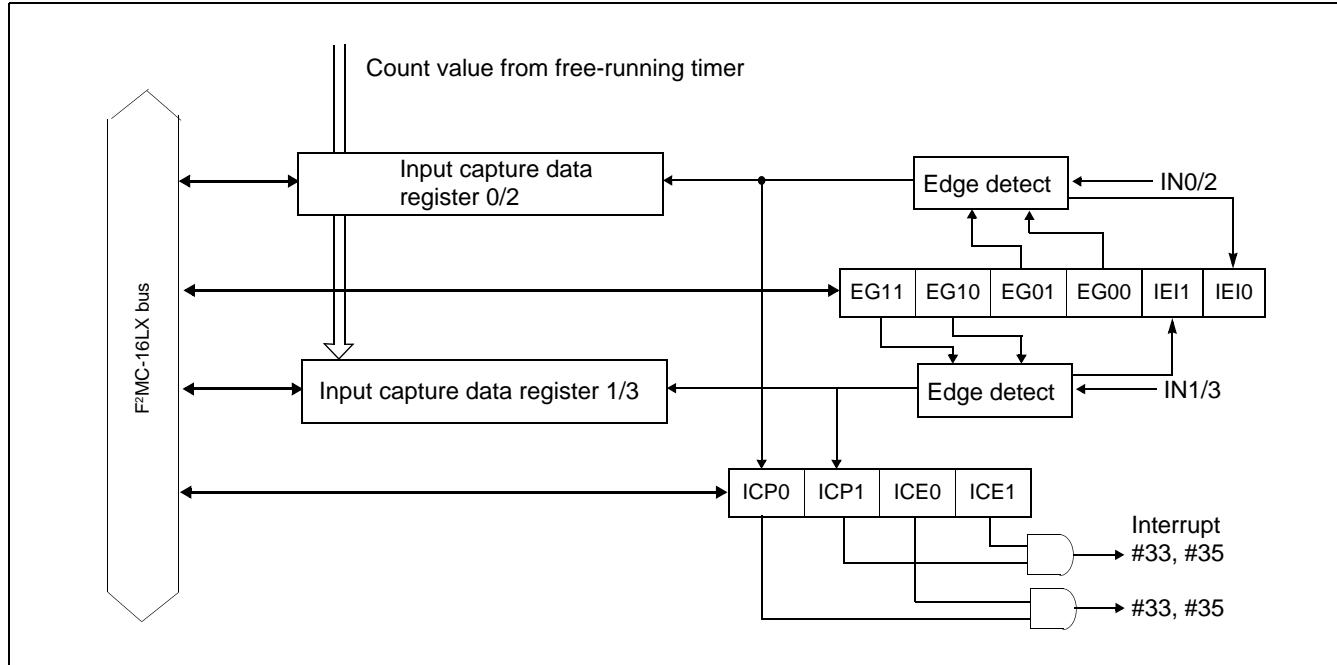

MB90820 Series

- Block diagram of waveform generator

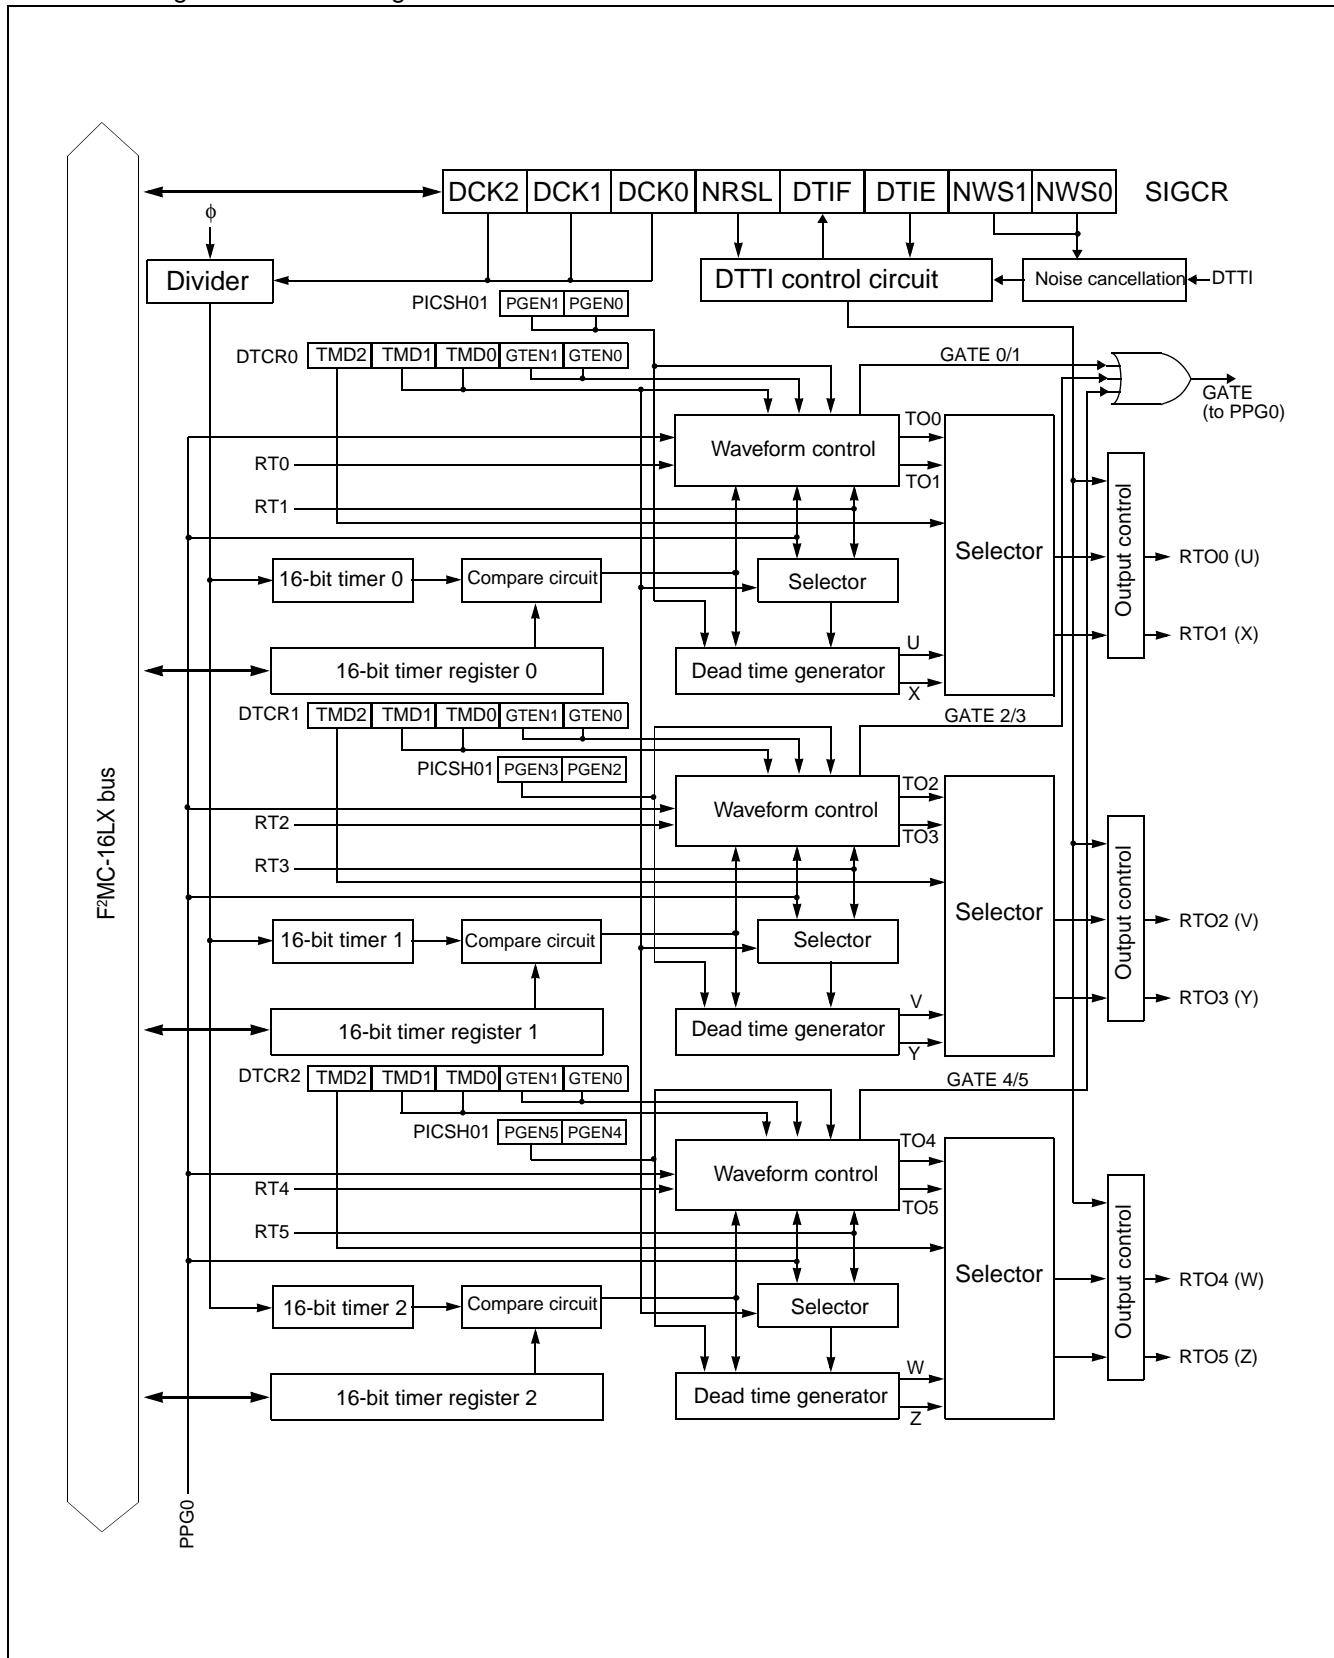

8. PWC Timer (× 2)




The PWC (pulse width count) timer is a 16-bit multi-functional up counter with reload timer functions and input signal pulse width count functions.

The PWC timer consists of a 16-bit counter, an input pulse divider, a division ratio control register, a count input pin, a pulse output pin, and a 16-bit control register.

The PWC timer has the following features:

- Interruption is generated when timer overflow or end of PWC measurement.
 - EI²OS is supported.
 - Timer functions :
 - Generates an interrupt request at set time intervals.
 - Outputs pulse signals synchronized with the timer cycle.
 - Selects the counter clock from three internal clocks.
 - Pulse-width count functions:
 - Counts the time between external pulse input events.
 - Selects the counter clock from three internal clocks.
 - Count mode:
 - H pulse width (rising edge to falling edge) / L pulse width (falling edge to rising edge)
 - Rising-edge cycle (rising edge to falling edge) / Falling-edge cycle (falling edge to rising edge)
 - Count between edges (rising or falling edge to falling or rising edge)
- Capable of counting cycles by dividing input pulses by 2^2 , 2^4 , 2^6 , 2^8 using an 8-bit input divider.
 Generates an interrupt request upon the completion of count operation.
 Selects single or consecutive count operation.

(1) Register configuration


Division Ratio Control Register								
Bit								
Address: ch0 0000C4H ch1 00002CH								DIV0, DIV1
								
Read/write ⇡ — — — — — R/W R/W Initial value ⇡ X X X X X X 0 0								
PWC Data Buffer Register (Upper)								
Bit								
Address: ch0 0000C3H ch1 00002BH								PWC0, PWC1
								
Read/write ⇡ R/W R/W R/W R/W R/W R/W R/W Initial value ⇡ X X X X X X X								
PWC Data Buffer Register (Lower)								
Bit								
Address: ch0 0000C2H ch1 00002AH								PWC0, PWC1
								
Read/write ⇡ R/W R/W R/W R/W R/W R/W R/W Initial value ⇡ X X X X X X X								

Note : Registers PWC0, PWC1 are word access only.

(Continued)


MB90820 Series

(Continued)

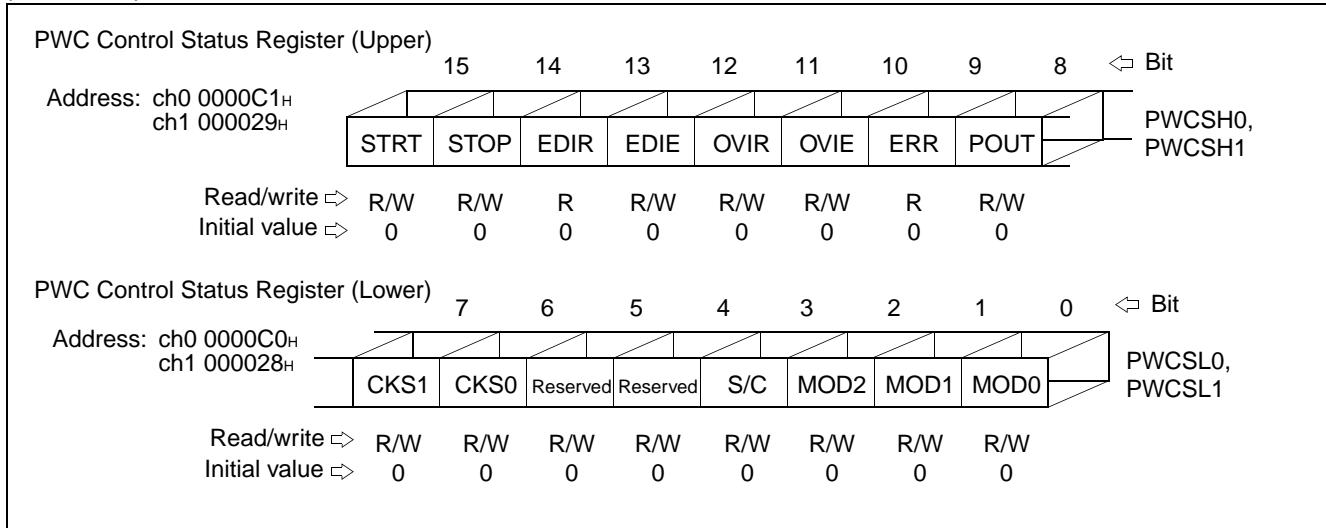

Note : Registers PWC0, PWC1 are word access only.

(2) Block diagram

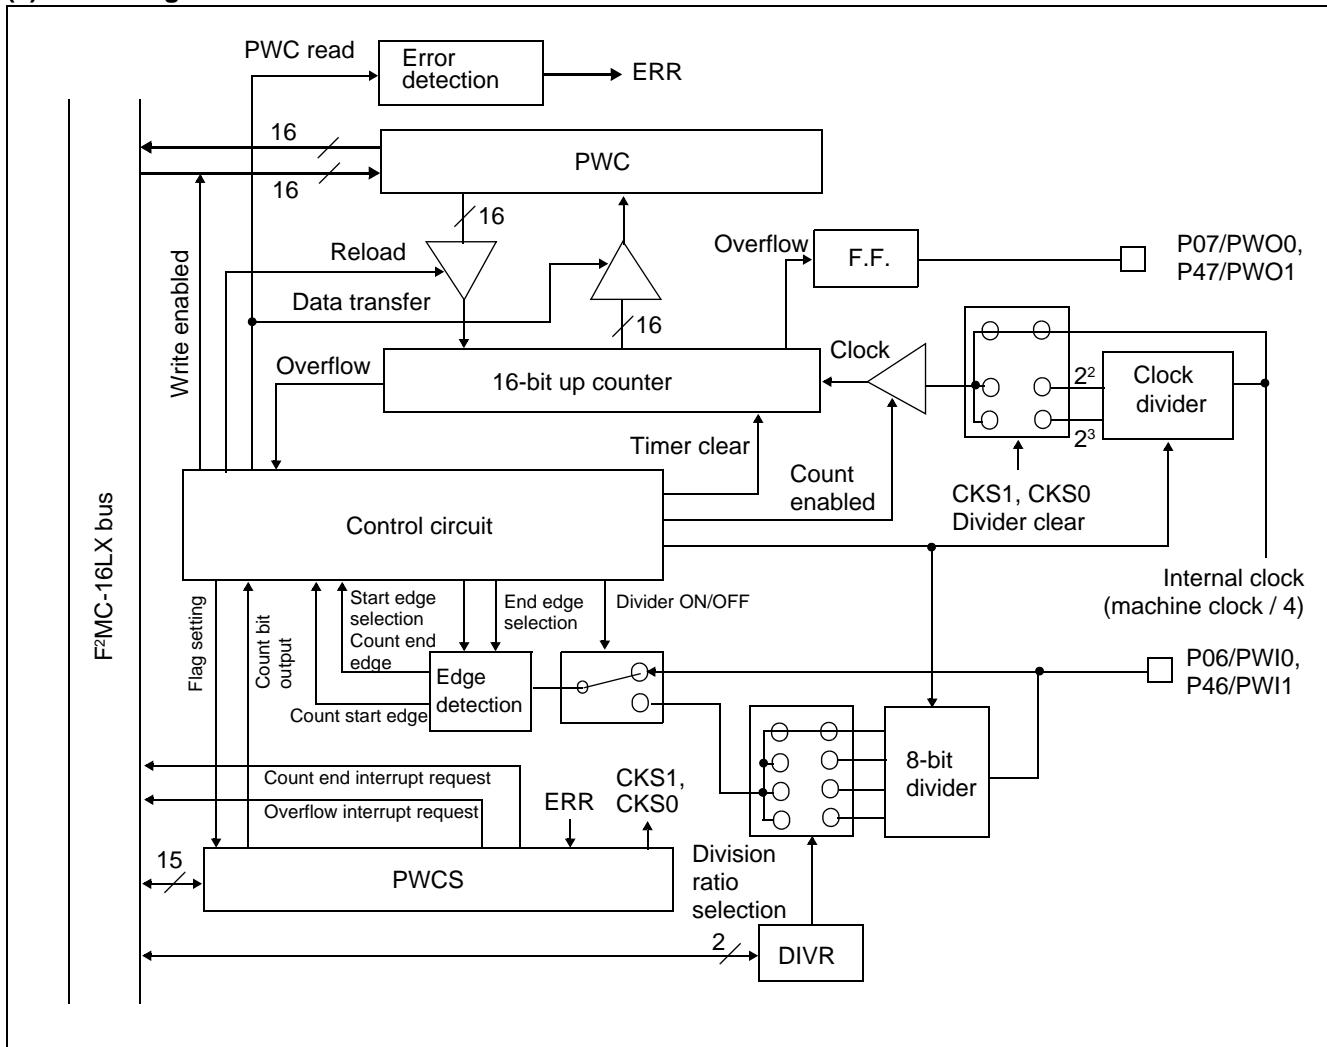

9. UART (× 2)

The UART is a serial I/O port for asynchronous (start-stop) communication or clock-synchronous communication.

The UART has the following features :

- Full-duplex double buffering
- Capable of asynchronous (start-stop bit) and CLK-synchronous communications
- Support for the multiprocessor mode
- Various method of baud rate generation :
 - External clock input possible
 - Internal clock (a clock supplied from 16-bit reload timer can be used.)
 - Embedded dedicated baud rate generator

Operation	Baud rate
Asynchronous	31250/9615/4808/2404/1202 bps
CLK synchronous	2 M/1 M/500 K/250 K/125 K/62.5K bps

Note : Assuming internal machine clock frequencies of 6 MHz, 8 MHz, 10 MHz, 12 MHz, and 16 MHz.


- Error detection functions (parity, framing, overrun)
- NRZ (Non Return to Zero) signal format
- Interrupt request :
 - Receive interrupt (receive complete, receive error detection)
 - Transmit interrupt (transmission complete)
 - Transmit / receive conforms to extended intelligent I/O service (EI²OS).

MB90820 Series

(1) Register configuration

Serial Status Register


Address: ch0 000023H
ch1 000027H

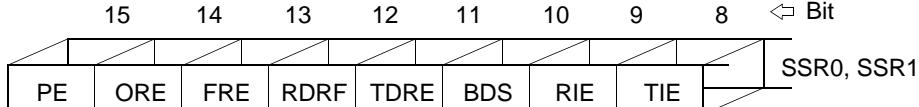

Read/write ⇡ R R R R R R/W R/W R/W
Initial value ⇡ 0 0 0 0 1 0 0 0

Serial Input Data Register / Serial Output Data Register


Address: ch0 000022H
ch1 000026H

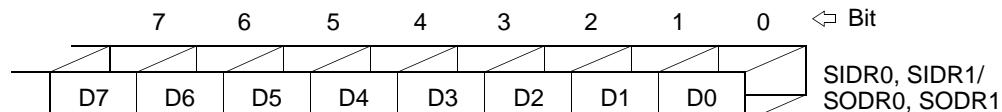

Read/write ⇡ R/W R/W R/W R/W R/W R/W R/W R/W
Initial value ⇡ X X X X X X X X

Serial Control Register


Address: ch0 000021H
ch1 000025H



Read/write ⇡ R/W R/W R/W R/W R/W W R/W R/W
Initial value ⇡ 0 0 0 0 0 1 0 0

Serial Mode Register


Address: ch0 000020H
ch1 000024H



Read/write ⇡ R/W R/W R/W R/W R/W R/W R/W R/W
Initial value ⇡ 0 0 0 0 0 0 0 0


Clock Division Control Register

Address: ch0 000035H
ch1 000037H



Read/write ⇡ R/W R/W - - - R/W R/W R/W
Initial value ⇡ 0 0 X X X 0 0 0

(2) Block diagram

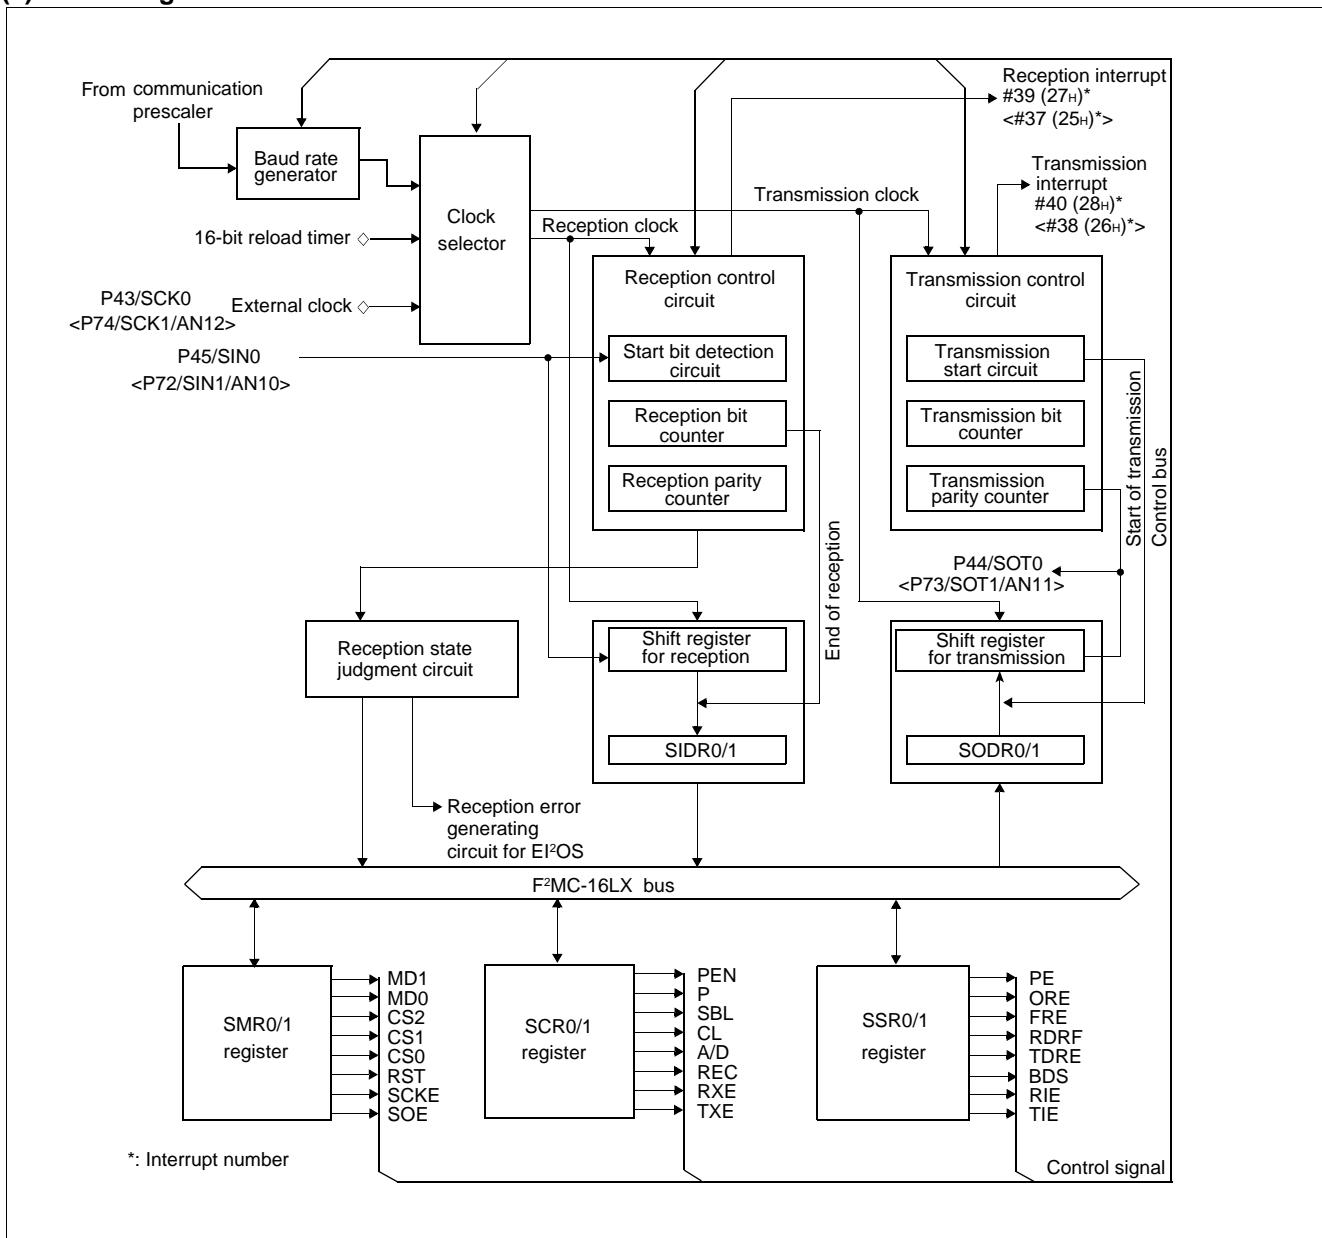

MB90820 Series

10. DTP/External Interrupts

The DTP/external interrupt circuit is activated by the signal supplied to a DTP/external interrupt pin. The CPU accepts the signal using the same procedure it uses for normal hardware interrupts and generates external interrupts or activates the extended intelligent I/O service (EI²OS).


Features of DTP/External Interrupt :

- Total 8 external interrupt channels.
- Two request levels ("H" and "L") are provided for the intelligent I/O service.
- Four request levels (rising edge, falling edge, "H" level and "L" level) are provided for external interrupt requests.

(1) Register configuration

DTP/Interrupt Source Register									Bit
15	14	13	12	11	10	9	8	Bit	
Address: 0000031H	ER7	ER6	ER5	ER4	ER3	ER2	ER1	ER0	EIRR
Read/write	R/W	Initial value							
	0	0	0	0	0	0	0	0	
DTP/Interrupt Enable Register									
7	6	5	4	3	2	1	0	Bit	
Address: 000030H	EN7	EN6	EN5	EN4	EN3	EN2	EN1	EN0	ENIR
Read/write	R/W	Initial value							
	0	0	0	0	0	0	0	0	
Request Level Setting Register (Upper)									
15	14	13	12	11	10	9	8	Bit	
Address: 0000033H	LB7	LA7	LB6	LA6	LB5	LA5	LB4	LA4	ELVRH
Read/write	R/W	Initial value							
	0	0	0	0	0	0	0	0	
Request Level Setting Register (Lower)									
7	6	5	4	3	2	1	0	Bit	
Address: 000032H	LB3	LA3	LB2	LA2	LB1	LA1	LB0	LA0	ELVRL
Read/write	R/W	Initial value							
	0	0	0	0	0	0	0	0	

(2) Block diagram

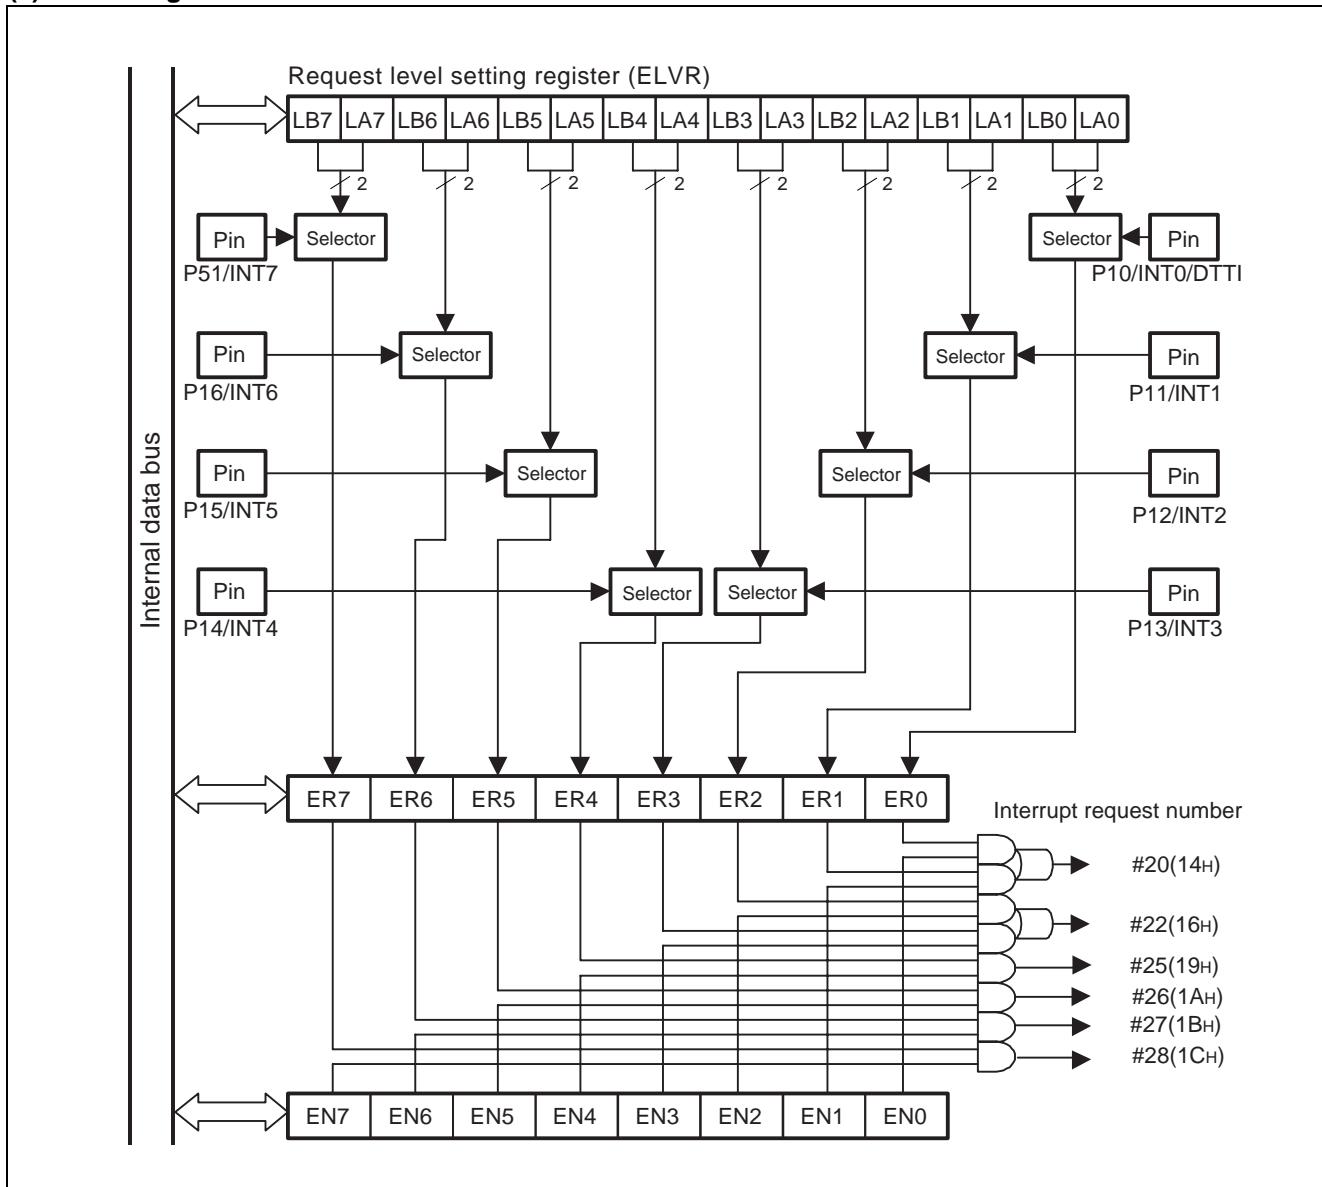

MB90820 Series

11. Delayed Interrupt Generation Module


The delayed interrupt generation module is used to generate a task switching interrupt. Interrupt requests to the F²MC-16LX CPU can be generated and cleared by software using this module.

(1) Register configuration

Delay interrupt cause/clear register

	15	14	13	12	11	10	9	8	Bit
Address: 00009F _H	—	—	—	—	—	—	—	R0	DIRR
Read/write ↡	—	—	—	—	—	—	—	—	R/W
Initial value ↡	X	X	X	X	X	X	X	0	

(2) Block diagram

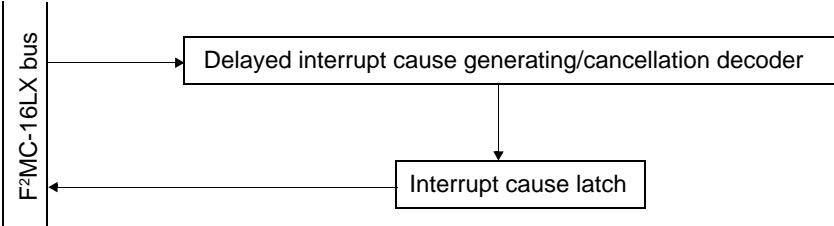

12. A/D Converter

The A/D converter converts the analog voltage input (input voltage) to an analog input pin to a digital value. It has the following features :

- The minimum conversion time is 3 μ s (for a machine clock of 24 MHz; including sampling time).
- The converter uses the RC-type successive approximation conversion method with a sample and hold circuit.
- A resolution of 10 bits or 8 bits can be set.
- Up to 16 channels for analog input pins can be selected by a program.
- Various conversion mode :
 - Single conversion mode : Selectively convert one channel.
 - Scan conversion mode : Continuously convert multiple channels. Maximum of 16 selectable channels.
 - Continuous conversion mode : Repeatedly convert specified channels.
 - Stop conversion mode : Convert one channel then halt until the next activation (enables synchronization of the conversion start timing).
- At the end of A/D conversion, an interrupt request can be generated and EI²OS can be activated.
- In the interrupt-enabled state, the conversion data protection function prevents any part of the data from being lost through continuous conversion.
- The conversion can be activated by software, 16-bit reload timer 1 (rising edge) and 16-bit free-running timer zero detection edge.

(1) Register configuration

A/D Control Status Register 1 (upper)

	15	14	13	12	11	10	9	8	Bit
Address:	00000C7H	BUSY	INT	INTE	PAUS	STS1	STS0	STRT	—
Read/write	⇒ R/W	R/W	R/W	R/W	R/W	R/W	W	—	ADCS1
Initial value	⇒ 0	0	0	0	0	0	0	X	

A/D Control Status Register 0 (lower)

	7	6	5	4	3	2	1	0	Bit
Address:	0000C6H	MD1	MD0	S10	—	—	—	—	Reserved
Read/write	⇒ R/W	R/W	R/W	—	—	—	—	—	ADCS0
Initial value	⇒ 0	0	0	X	X	X	X	0	

A/D Data Register 1 (upper)

	15	14	13	12	11	10	9	8	Bit
Address:	00000C9H	—	—	—	—	—	D9	D8	ADCR1
Read/write	⇒ —	—	—	—	—	—	R	R	
Initial value	⇒ X	X	X	X	X	X	X	X	

A/D Data Register 0 (lower)

	7	6	5	4	3	2	1	0	Bit
Address:	0000C8H	D7	D6	D5	D4	D3	D2	D1	D0
Read/write	⇒ R	R	R	R	R	R	R	R	ADCR0
Initial value	⇒ X	X	X	X	X	X	X	X	

(Continued)

MB90820 Series

(Continued)

A/D Setting Register 1 (upper)

	15	14	13	12	11	10	9	8	Bit	
Address:	00000CB _H	ST2	ST1	ST0	CT2	CT1	CT0	Reserved	ANS3	ADSR1
Read/write	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W		
Initial value	⇒ 0	⇒ 0	⇒ 0	⇒ 0	⇒ 0	⇒ 0	⇒ 0	⇒ 0		

A/D Setting Register 0 (lower)

	7	6	5	4	3	2	1	0	Bit	
Address:	0000CA _H	ANS2	ANS1	ANS0	Reserved	ANE3	ANE2	ANE1	ANE0	ADSR0
Read/write	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W		
Initial value	⇒ 0	⇒ 0	⇒ 0	⇒ 0	⇒ 0	⇒ 0	⇒ 0	⇒ 0		


A/D Input Enable Register 0

	15	14	13	12	11	10	9	8	Bit	
Address:	00000C5 _H	ADE7	ADE6	ADE5	ADE4	ADE3	ADE2	ADE1	ADE0	ADER0
Read/write	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W		
Initial value	⇒ 1	⇒ 1	⇒ 1	⇒ 1	⇒ 1	⇒ 1	⇒ 1	⇒ 1		

A/D Input Enable Register 1

	7	6	5	4	3	2	1	0	Bit	
Address:	0000D0 _H	ADE15	ADE14	ADE13	ADE12	ADE11	ADE10	ADE9	ADE8	ADER1
Read/write	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W	⇒ R/W		
Initial value	⇒ 1	⇒ 1	⇒ 1	⇒ 1	⇒ 1	⇒ 1	⇒ 1	⇒ 1		

(2) Block diagram

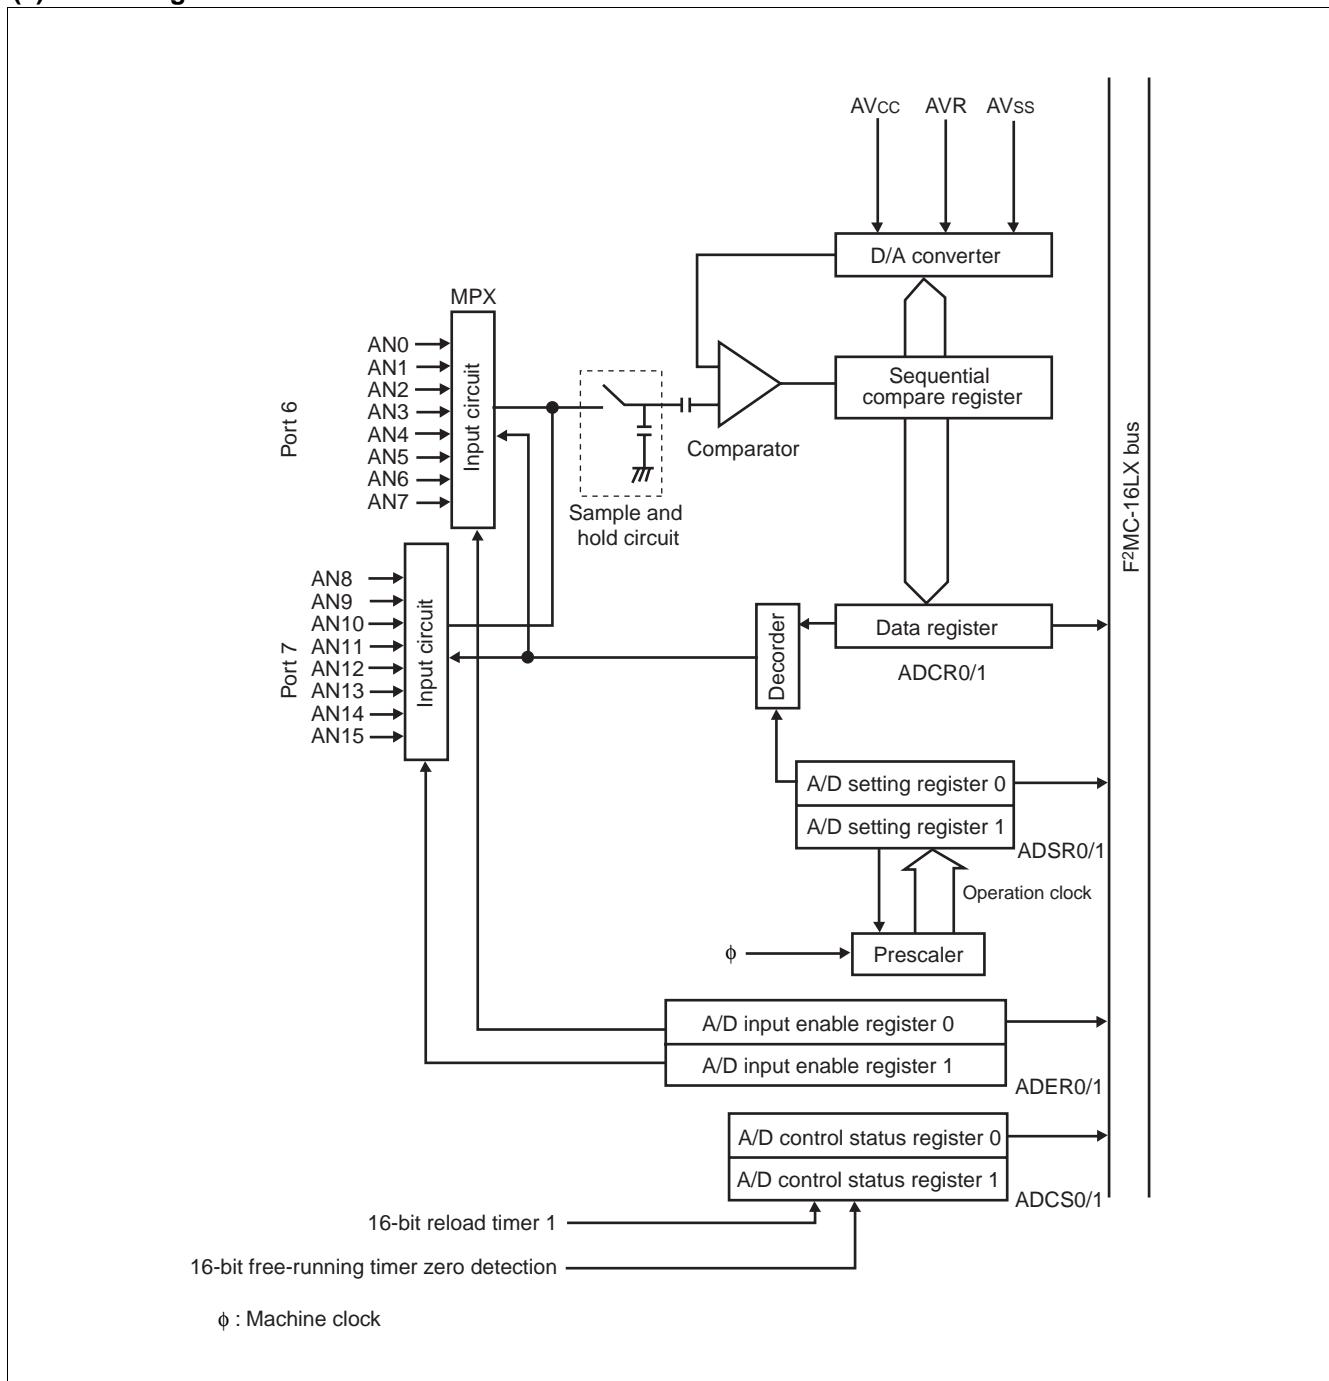

MB90820 Series

13. D/A Converter

The D/A converter is used to generate an analog output from an 8-bit digital input. By setting the enable bit in the D/A control register (DACR) to 1, it will enable the corresponding D/A output channel. Hence, setting this bit to 0 will disable that channel.

If D/A output is disabled, the analog switch inserted to the output of each D/A converter channel in series is turned off. In the D/A converter, the bit is cleared to 0 and the direct-current path is shut off. The above is also true in the stop mode.

The output voltage of the D/A converter ranges from 0 V to $255/256 \times AV_{cc}$. To change the output voltage range, adjust the AV_{cc} voltage externally.

The D/A converter output does not have the internal buffer amplifier. The analog switch ($= 100 \Omega$) is inserted to the output in series. To apply load to the output externally, estimate a sufficient stabilization time.

Table below lists the theoretical values of output voltage of the D/A converter.

Value written to DA07 to DA00 and DA17 to DA10	Theoretical value of output voltage
00 _H	$0/256 \times AV_{cc} (= 0 \text{ V})$
01 _H	$1/256 \times AV_{cc}$
02 _H	$2/256 \times AV_{cc}$
:	:
FD _H	$253/256 \times AV_{cc}$
FE _H	$254/256 \times AV_{cc}$
FF _H	$255/256 \times AV_{cc}$

(1) Register configuration

D/A data register 1

Bit	15	14	13	12	11	10	9	8	
Address:0000CDH	DA17	DA16	DA15	DA14	DA13	DA12	DA11	DA10	DAT1
Read/write →	R/W								
Initial value →	X	X	X	X	X	X	X	X	

D/A data register 0

Bit	7	6	5	4	3	2	1	0	
Address:0000CCH	DA07	DA06	DA05	DA04	DA03	DA02	DA01	DA00	DAT0
Read/write →	R/W								
Initial value →	X	X	X	X	X	X	X	X	

D/A control register 1


Bit	15	14	13	12	11	10	9	8	
Address:0000CFH	-	-	-	-	-	-	-	-	DACR1
Read/write →	-	-	-	-	-	-	-	R/W	
Initial value →	X	X	X	X	X	X	X	0	

D/A control register 0

Bit	7	6	5	4	3	2	1	0	
Address:0000CEH	-	-	-	-	-	-	-	-	DACR0
Read/write →	-	-	-	-	-	-	-	R/W	
Initial value →	X	X	X	X	X	X	X	0	

MB90820 Series

(2) Block diagram

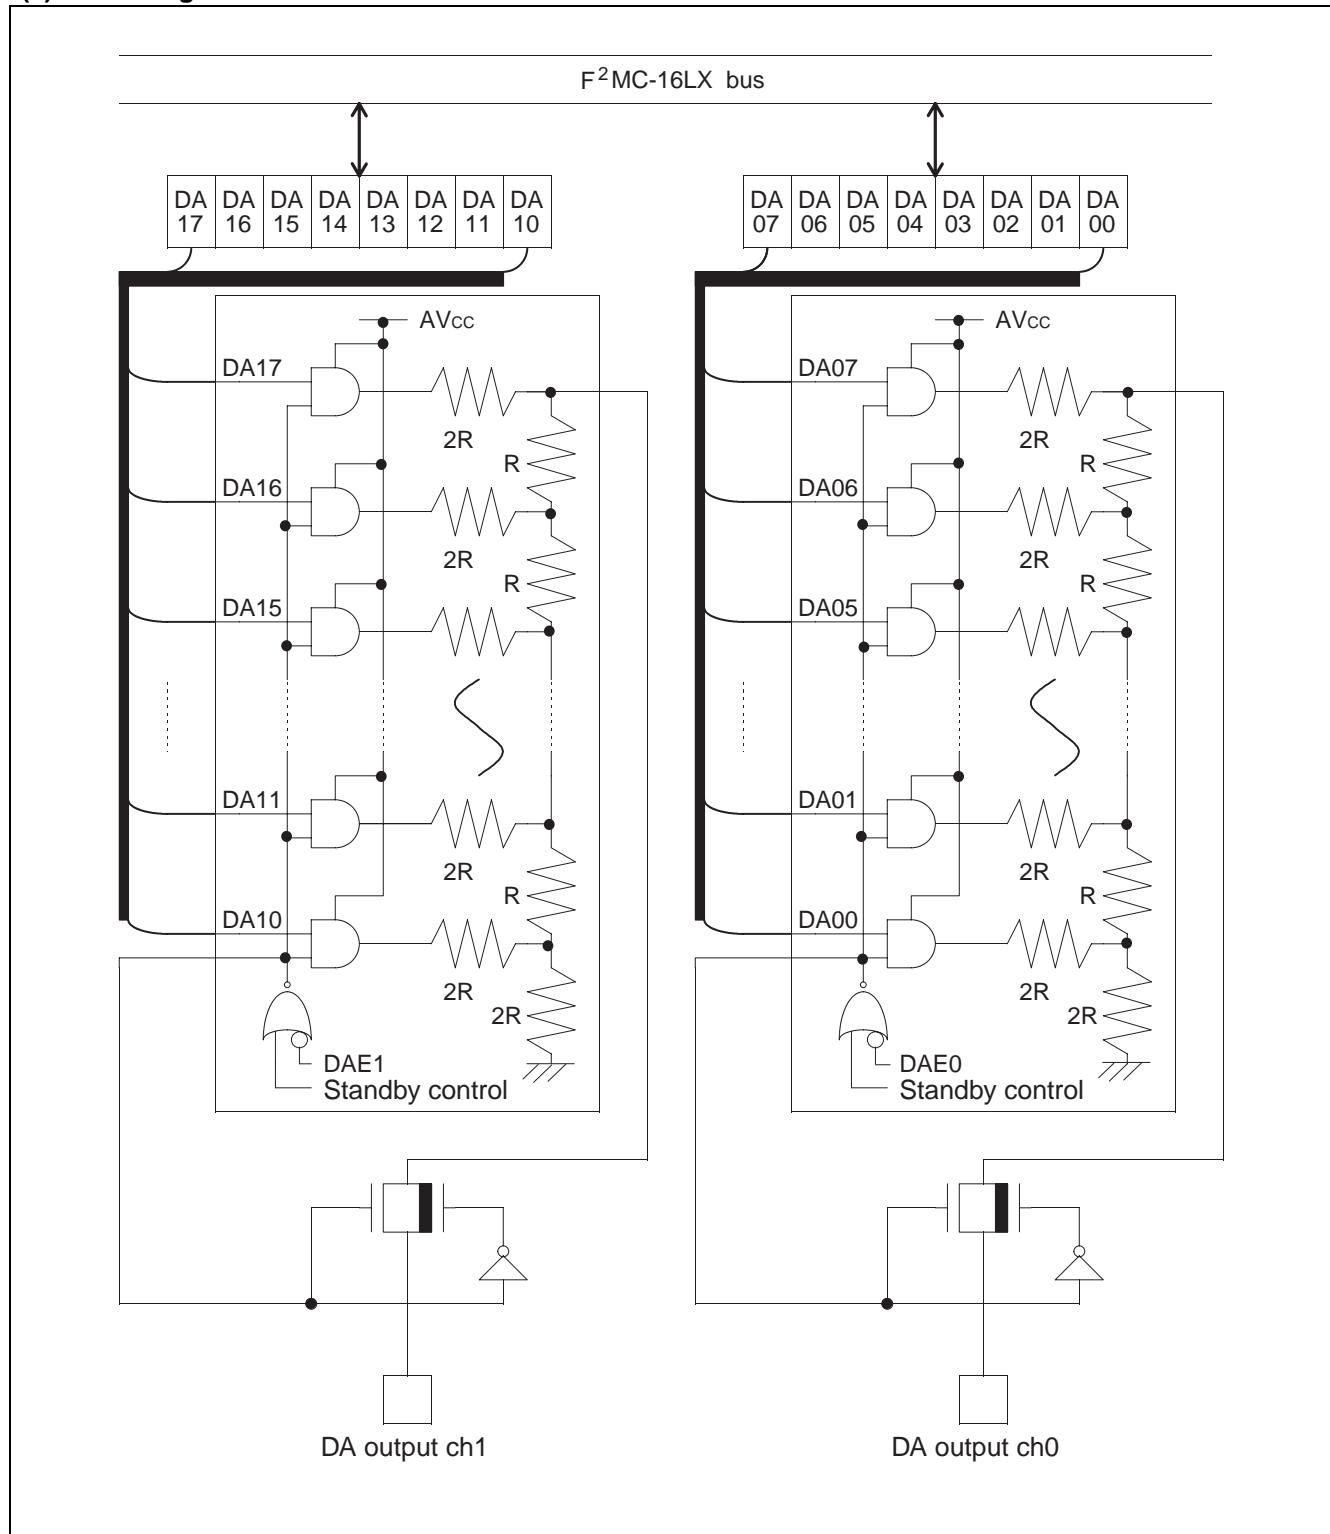

14. ROM Correction Function

When the corresponding address matches the value set in the address detection register, the instruction code to be loaded into the CPU is forced to be replaced with the INT9 instruction code (01H). When executing a set instruction, the CPU executes the INT9 instruction. The address detection function is implemented by processing using the INT9 instruction routine.

The device contains two address detection registers, each provided with a compare enable bit. When the value set in the address detection register matches an address and the interrupt enable bit is “1”, the instruction code to be loaded into the CPU is forced to be replaced with the INT9 instruction code.

(1) Register configuration

Program Address Detection Control Status Register									Bit
	7	6	5	4	3	2	1	0	Bit
Address: 00009E _H	—	—	—	—	AD1E	AD1D	AD0E	AD0D	PACSR
Read/write	—	—	—	—	R/W	R/W	R/W	R/W	
Initial value	X	X	X	X	0	0	0	0	
Program Address Detection Register 0 (Upper Byte)									Bit
	7	6	5	4	3	2	1	0	Bit
Address: 001FF2 _H									PADRHO
Read/write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
Initial value	X	X	X	X	X	X	X	X	
Program Address Detection Register 0 (Middle Byte)									Bit
	15	14	13	12	11	10	9	8	Bit
Address: 001FF1 _H									PADRM0
Read/write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
Initial value	X	X	X	X	X	X	X	X	
Program Address Detection Register 0 (Lower Byte)									Bit
	7	6	5	4	3	2	1	0	Bit
Address: 001FF0 _H									PADRL0
Read/write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
Initial value	X	X	X	X	X	X	X	X	
Program Address Detection Register 1 (Upper Byte)									Bit
	15	14	13	12	11	10	9	8	Bit
Address: 001FF5 _H									PADR1
Read/write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	
Initial value	X	X	X	X	X	X	X	X	

(Continued)

MB90820 Series

(Continued)

Program Address Detection Register 1 (Middle Byte)								
	7	6	5	4	3	2	1	0
Address: 001FF4H								
Read/write	⇒ R/W	R/W						
Initial value	⇒ X	X	X	X	X	X	X	X

Bit


PADRM1

Program Address Detection Register 1 (Lower Byte)								
	15	14	13	12	11	10	9	8
Address: 001FF3H								
Read/write	⇒ R/W	R/W						
Initial value	⇒ X	X	X	X	X	X	X	X

Bit

PADRL1

(2) Block diagram

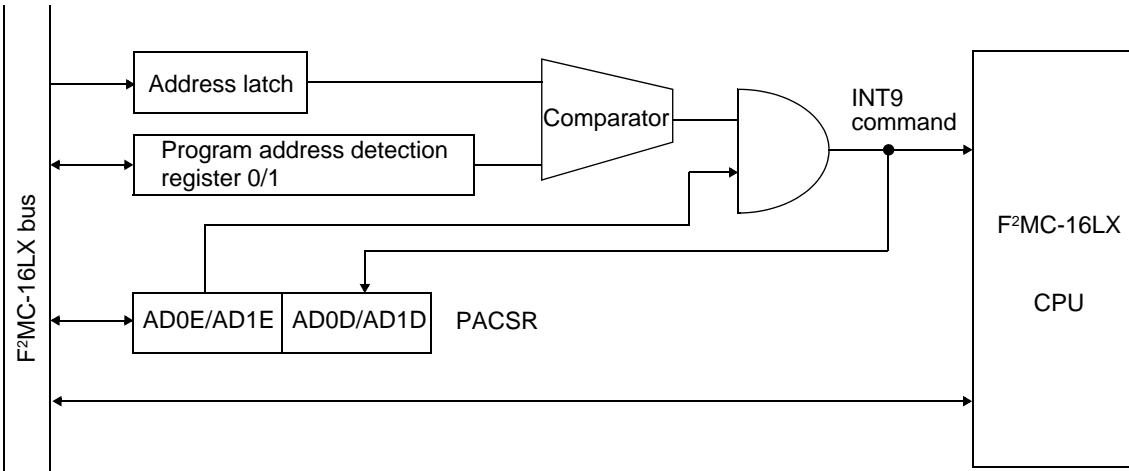


15. ROM Mirroring Function Selection Module

The ROM mirror function selection module sets the data in ROM assigned to FF bank so that the data is read by access to 00 bank.

(1) Register configuration

ROM Mirror Function Selection Register							
15	14	13	12	11	10	9	8 ⇐ Bit
Address : 00006F _H	-	-	-	-	-	-	M1
Read/write ⇌	-	-	-	-	-	-	R/W
Initial value ⇌	X	X	X	X	X	X	1

(2) Block diagram

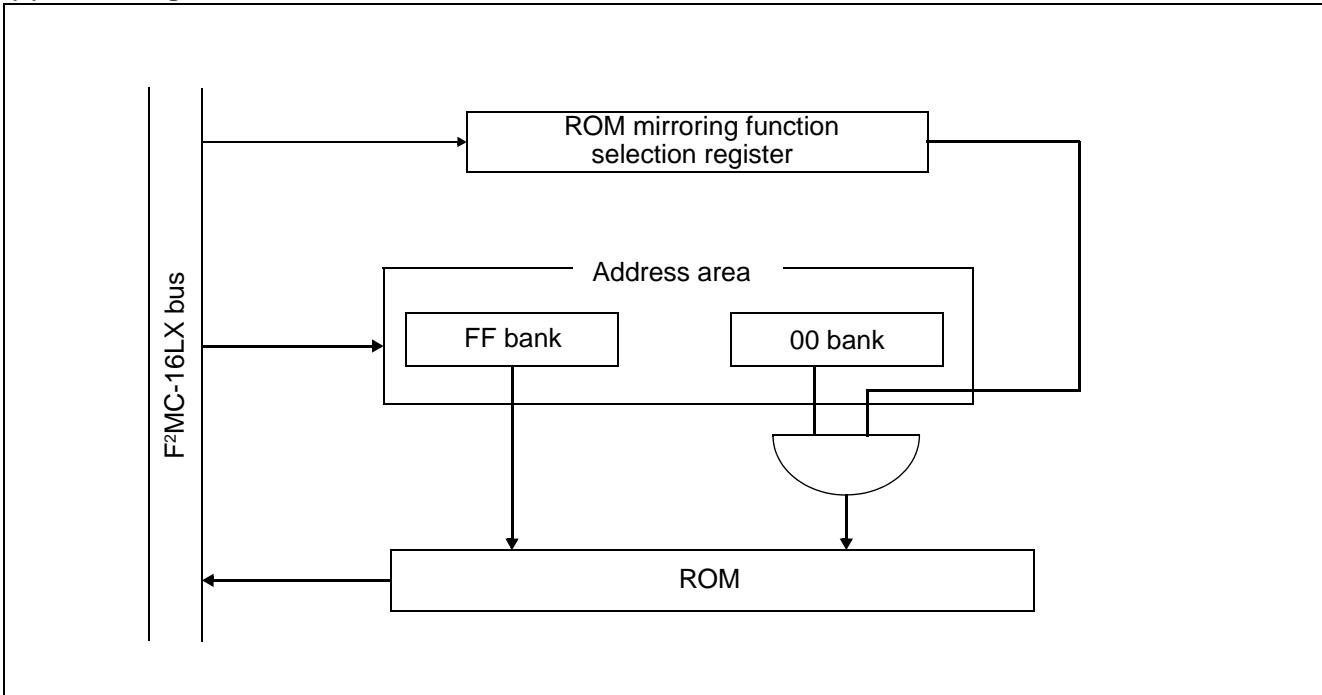

MB90820 Series

16. 512K/1024K bits Flash Memory

The 512K bits flash memory is allocated in the FF_H banks on the CPU memory map.

The 1024K bits flash memory is allocated in the FE_H and FF_H banks on the CPU memory map.

Like Mask ROM, flash memory is read-accessible and program-accessible to the CPU using the flash memory interface circuit. The flash memory can be programmed/erased by the instruction from the CPU via the flash memory interface circuit. The flash memory can therefore be reprogrammed (updated) while still on the circuit board under integrated CPU control, allowing program code and data to be improved efficiently.

Note that sector operations such as "enable sector protect" cannot be used.

Features of 512K/1024K bits flash memory

- 64K × 8 bits/32K × 16 bits (32K + 8K × 2 + 16K) sector configuration for 512K bits flash memory
- 128K × 8 bits/64K × 16 bits (64K + 32K + 8K × 2 + 16K) sector configuration for 1024K bits flash memory
- Automatic program algorithm (same as the Embedded Algorithm* : MBM29F400TA)
- Installation of the deletion temporary stop/delete/restart function
- Write/delete completion detected by the data polling or toggle bit
- Write/delete completion detected by the CPU interrupt
- Compatibility with the JEDEC standard-type command
- Each sector deletion can be executed (sectors can be freely combined)
- Flash security function
- Number of write/delete operations are guaranteed 10,000 times.

* : Embedded Algorithm is a trademark of Advanced Micro Devices, Inc.

(1) Register configuration

Flash Memory Control Status Register									Bit
Address: 0000AE _H									FMCS
Read/write ⇡	R/W	R/W	R/W	R	—	—	—	—	
Initial value ⇡	0	0	0	X	0	0	0	0	

(2) Sector configuration of flash memory

The flash memory has the sector configuration illustrated below. The addresses in the illustration are the upper and lower addresses of each sector.

When 512K bits flash memory is accessed from the CPU, SA0 to SA3 are allocated in the FF bank.

Flash memory	CPU address	*Writer address
SA3 (16K bytes)	FFFFFF _H	7FFFF _H
	FFC000 _H	7C000 _H
	FFBFFF _H	7BFFF _H
	FFA000 _H	7A000 _H
SA1 (8K bytes)	FF9FFF _H	79FFF _H
	FF8000 _H	78000 _H
SA0 (32K bytes)	FF7FFF _H	77FFF _H
	FF0000 _H	70000 _H

When 1024K bits flash memory is accessed from the CPU, SA0 to SA4 are allocated in the FE and FF bank.

Flash memory	CPU address	*Writer address
SA4 (16K bytes)	FFFFFF _H	7FFFF _H
	FFC000 _H	7C000 _H
	FFBFFF _H	7BFFF _H
	FFA000 _H	7A000 _H
SA2 (8K bytes)	FF9FFF _H	79FFF _H
	FF8000 _H	78000 _H
SA1 (32K bytes)	FF7FFF _H	77FFF _H
	FF0000 _H	70000 _H
SA0 (64K bytes)	FE7FFF _H	6FFFF _H
	FE0000 _H	60000 _H

* : The writer address is the address corresponding to the CPU address when writing data from a parallel flash memory writer. Use the writer address when programming or erasing using a general-purpose parallel writer.

MB90820 Series

■ ELECTRICAL CHARACTERISTICS

1. Absolute Maximum Ratings

Parameter	Symbol	Rating		Unit	Remarks
		Min	Max		
Power supply voltage ^{*1}	V _{CC}	V _{SS} - 0.3	V _{SS} + 6.0	V	
	AV _{CC}	V _{SS} - 0.3	V _{SS} + 6.0	V	V _{CC} = AV _{CC} ^{*2}
	AVR	V _{SS} - 0.3	V _{SS} + 6.0	V	AV _{CC} ≥ AVR, AVR ≥ AV _{SS}
Input voltage ^{*1}	V _I	V _{SS} - 0.3	V _{SS} + 6.0	V	^{*3}
Output voltage ^{*1}	V _O	V _{SS} - 0.3	V _{SS} + 6.0	V	^{*3}
Maximum clamp current	I _{CLAMP}	- 2.0	+ 2.0	mA	^{*5}
Total maximum clamp current	$\Sigma I_{CLAMP} $	—	20	mA	^{*5}
"L" level maximum output current	I _{OL}	—	15	mA	^{*4}
"L" level average output current	I _{OLAV1}	—	4	mA	Except for P00 to P07, P82 to P87
	I _{OLAV2}	—	12	mA	P00 to P07, P82 to P87
"L" level total maximum output current	ΣI_{OL}	—	100	mA	
"L" level total average output current	ΣI_{OLAV}	—	50	mA	
"H" level maximum output current	I _{OH}	—	-15	mA	^{*4}
"H" level average output current	I _{OHAV}	—	-4	mA	
"H" level total maximum output current	ΣI_{OH}	—	-100	mA	
"H" level total average output current	ΣI_{OHAV}	—	-50	mA	
Power consumption	P _D	—	430	mW	
Operating temperature	T _A	-40	+85	°C	
Storage temperature	T _{STG}	-55	+150	°C	

^{*1} : This parameter is based on V_{SS} = AV_{SS} = 0.0 V.

^{*2} : AV_{CC} must never exceed V_{CC} when the power is turned on.


^{*3} : V_I and V_O must never exceed V_{CC} + 0.3 V. However if the maximum current to/from an input is limited by some means with external components, the I_{CLAMP} rating supersedes the V_I rating.

^{*4} : The maximum output current is a peak value for a corresponding pin.

- ^{*5} :
- Applicable to pins: P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P47, P50, P51, P80 to P87.
 - Use within recommended operating conditions.
 - Use at DC voltage (current).
 - The +B signal is an input signal exceeding V_{CC} voltage. The +B signal should always be applied a limiting resistance placed between the +B signal and the microcontroller.
 - The value of the limiting resistance should be set so that when the +B signal is applied the input current to the microcontroller pin does not exceed rated values, either instantaneously or for prolonged periods.
 - Note that when the microcontroller drive current is low, such as in the power saving modes, the +B input potential may pass through the protective diode and increase the potential at the V_{CC} pin, and this may affect other devices.

- Note that if a +B signal is input when the microcontroller power supply is off (not fixed at 0 V), the power supply is provided from the pins, so that incomplete operation may result.
- Note that if the +B input is applied during power-on, the power supply is provided from the pins and the resulting supply voltage may not be sufficient to operate the power-on reset.
- Care must be taken not to leave the +B input pin open.
- Note that analog system input/output pins (LCD drive pins and comparator input pins, etc.) other than the A/D input pins cannot accept +B input.
- Sample recommended circuits:

Input/output equivalent circuits

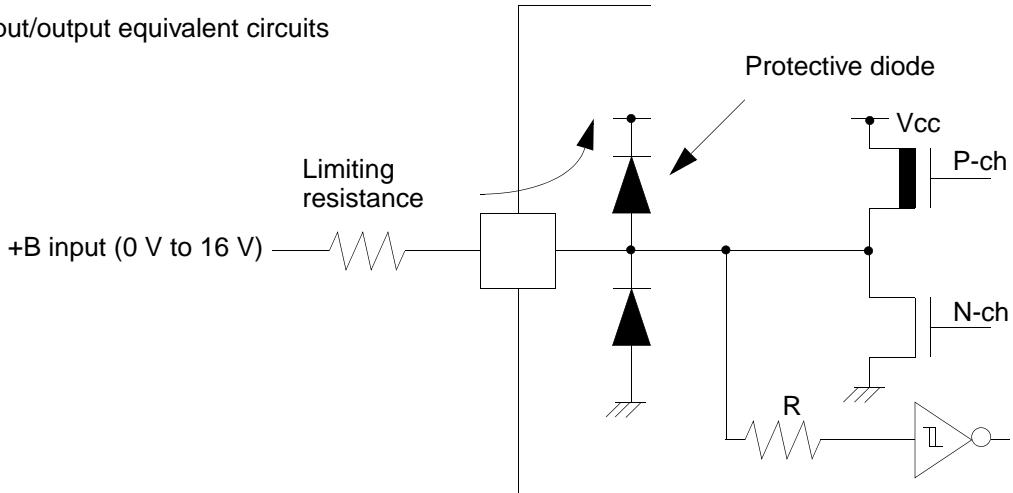

WARNING: Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

MB90820 Series

2. Recommended Operating Conditions


($V_{SS} = AV_{SS} = 0.0 \text{ V}$)

Parameter	Symbol	Pin name	Condition	Value		Unit	Remarks
				Min	Max		
Power supply voltage	V _{CC} AV _{CC}	—	—	4.5	5.5	V	At normal operation $T_A = -40 \text{ }^\circ\text{C}$ to $+85 \text{ }^\circ\text{C}$
		—	—	4.0	5.5	V	Normal operation when D/A converter is not used $T_A = -40 \text{ }^\circ\text{C}$ to $+85 \text{ }^\circ\text{C}$
		—	—	3.5	5.5	V	Normal operation when A/D converter and D/A converter are not used $T_A = -40 \text{ }^\circ\text{C}$ to $+85 \text{ }^\circ\text{C}$
		—	—	3.0	5.5	V	Maintains state in stop mode
“H” level input voltage	V _{IH}	P30 to P37, P60 to P67	V _{CC} = 5 V ± 10%	0.7 V _{CC}	V _{CC} + 0.3	V	CMOS input
	V _{IHS}	P00 to P07, P10 to P17 P20 to P27, P40 to P44, P45 ^{*1} , P46, P47, P50, P51, P70, P71, P72 ^{*1} , P73 to P77, P80 to P87, RST		0.8 V _{CC}	V _{CC} + 0.3	V	CMOS hysteresis input
	V _{IHM}	MD0, MD1, MD2		V _{CC} - 0.3	V _{CC} + 0.3	V	MD input
“L” level input voltage	V _{IL}	P30 to P37, P60 to P67		V _{SS} - 0.3	0.3 V _{CC}	V	CMOS input
	V _{ILS}	P00 to P07, P10 to P17 P20 to P27, P40 to P44, P45 ^{*1} , P46, P47, P50, P51, P70, P71, P72 ^{*1} , P73 to P77, P80 to P87 RST		V _{SS} - 0.3	0.2 V _{CC}	V	CMOS hysteresis input
	V _{ILM}	MD0, MD1, MD2		V _{SS} - 0.3	V _{SS} + 0.3	V	MD input
Smoothing capacitor	C _S	—	—	0.1	1.0	μF	*2
Reference input voltage of A/D converter	AVR	—	—	2.7	AV _{CC}	V	
Operating temperature	T _A	—	—	-40	+85	°C	

*1 : UART ch0/1 data input pins P45/SIN0, P72/SIN1/AN10 can be used as CMOS input by the communication prescaler control register (CDRR).

*2 : Use a ceramic capacitor or a capacitor with equivalent frequency characteristics. On the V_{CC} pin, connect a bypass capacitor that has a larger capacity than that of C_S. Refer to the following figure for connection of smoothing capacitor C_S.

- C pin connection circuit

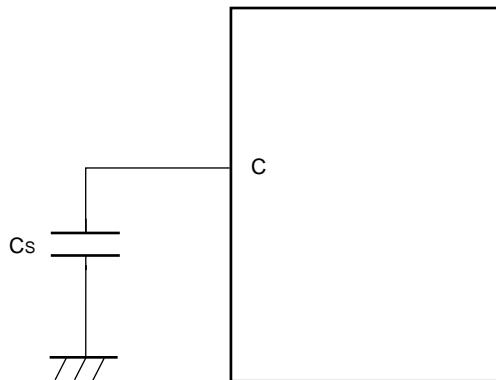

WARNING: The recommended operating conditions are required in order to ensure the normal operation of the semiconductor device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use semiconductor devices within their recommended operating condition ranges. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their FUJITSU representatives beforehand.

MB90820 Series

3. DC Characteristics

($V_{CC} = 5.0 \text{ V} \pm 10\%$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_A = -40 \text{ }^{\circ}\text{C}$ to $+85 \text{ }^{\circ}\text{C}$)

Parameter	Symbol	Pin name	Condition	Value			Unit	Remarks
				Min	Typ	Max		
"H" level output voltage	V_{OH}	All output pins	$V_{CC} = 4.5 \text{ V}$, $I_{OH} = -4.0 \text{ mA}$	$V_{CC} - 0.5$	—	—	V	
"L" level output voltage	V_{OL1}	All pins except P00 to P07 P82 to P87	$V_{CC} = 4.5 \text{ V}$, $I_{OL1} = 4.0 \text{ mA}$	—	—	0.4	V	
	V_{OL2}	P00 to P07 P82 to P87	$V_{CC} = 4.5 \text{ V}$, $I_{OL2} = 12.0 \text{ mA}$	—	—	0.4	V	
Input leakage current	I_{IL}	All input pins	$V_{CC} = 5.5 \text{ V}$, $V_{SS} < V_i < V_{CC}$	-5	—	5	μA	At pull-up disabled
Pull-up resistance	R_{UP}	P00 to P07 P10 to P17 P20 to P27 P30 to P37 \overline{RST}	—	25	50	100	$\text{k}\Omega$	
Pull-down resistance	R_{DOWN}	MD2	—	25	50	100	$\text{k}\Omega$	Mask ROM product

(Continued)

MB90820 Series

(Continued)

($V_{CC} = 5.0 \text{ V} \pm 10\%$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_A = -40 \text{ }^\circ\text{C}$ to $+85 \text{ }^\circ\text{C}$)

Parameter	Symbol	Pin name	Condition	Value			Unit	Remarks	
				Min	Typ	Max			
Power supply current*	I _{CC}	V _{CC}	V _{CC} = 5.0 V, Internal frequency: 24 MHz, At normal operation	—	35	50	mA	Mask ROM product	
			V _{CC} = 5.0 V, Internal frequency: 24 MHz, At writing in flash memory	—	45	60	mA	Flash memory prod- uct	
			V _{CC} = 5.0 V, Internal frequency: 24 MHz, At erasing memory	—	60	75	mA	Flash memory prod- uct	
	I _{CCS}		V _{CC} = 5.0 V, Internal frequency: 24 MHz, At sleep mode	—	15	25	mA	Mask ROM product	
			V _{CC} = 5.0 V, Internal frequency: 24 MHz, At sleep mode	—			mA	Flash memory prod- uct	
	I _{CTS}		V _{CC} = 5.0 V, Internal frequency: 2 MHz, At main timer mode	—	0.3	0.8	mA	Mask ROM product	
			V _{CC} = 5.0 V, Internal frequency: 2 MHz, At main timer mode	—			mA	Flash memory prod- uct	
	I _{CCT}		V _{CC} = 5.0 V, Internal frequency: 8 MHz, At timer mode, $T_A = +25 \text{ }^\circ\text{C}$	—	3	7	mA	Mask ROM product	
			V _{CC} = 5.0 V, Internal frequency: 8 MHz, At timer mode, $T_A = +25 \text{ }^\circ\text{C}$	—			μA	Flash memory prod- uct	
	I _{CCH}		In stop mode, $T_A = +25 \text{ }^\circ\text{C}$	—	5	20	mA	Mask ROM product	
			In stop mode, $T_A = +25 \text{ }^\circ\text{C}$	—			μA	Flash memory prod- uct	
Input capacitance	C _{IN}	Except AV _{CC} , AV _{SS} , AVR, C, V _{CC} and V _{SS}	—	—	5	15	pF		

* : The power supply current is regulated with an external clock.


MB90820 Series

4. AC Characteristics


(1) Clock Timings

($V_{CC} = 5.0 \text{ V} \pm 10\%$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$)


Parameter	Symbol	Pin name	Value			Unit	Remarks
			Min	Typ	Max		
Clock frequency	F_c	X0, X1	3	—	16	MHz	When using oscillation circuit
			3	—	24		When using external clock
			4	—	24		1 multiplied PLL
			4	—	12		2 multiplied PLL
			4	—	8		3 multiplied PLL
			4	—	6		4 multiplied PLL
			4	—	4		6 multiplied PLL
Clock cycle time	t_{HCYL}	X0, X1	62.5	—	333	ns	When using oscillation circuit
			41.67	—	333	ns	When using external clock
Input clock pulse width	P_{WH} P_{WL}	X0	10	—	—	ns	When using external clock, duty ratio is about 30% to 70%.
Input clock rise/fall time	t_{CR} t_{CF}	X0	—	—	5	ns	When using external clock
Internal operating clock frequency	f_{CP}	—	1.5	—	24	MHz	
Internal operating clock cycle time	t_{CP}	—	41.67	—	666	ns	

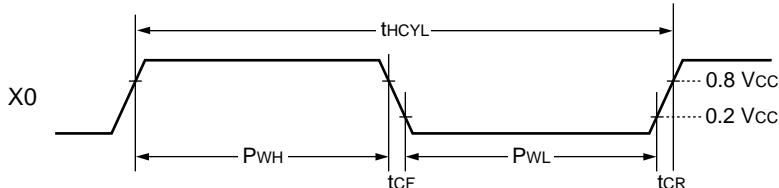

Relationship between internal operating clock frequency and power supply voltage

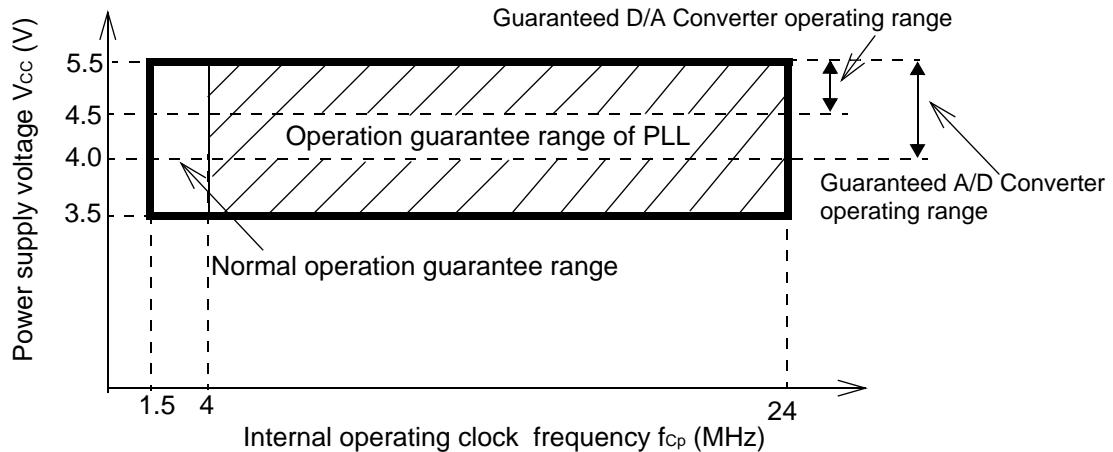


Relationship between clock frequency and internal operating clock frequency

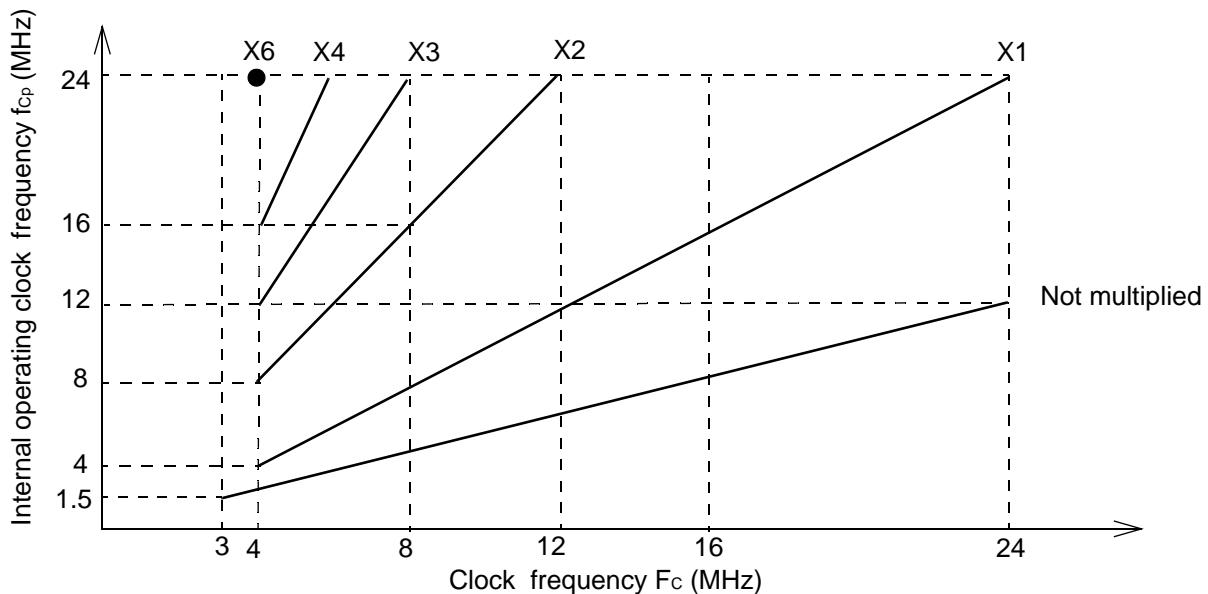

The AC ratings are measured for the following measurement reference voltages


- Input signal waveform

Hysteresis input pin




- Output signal waveform

Output pin



Pins other than hysteresis input/MD input



MB90820 Series


(2) External Reset

($V_{CC} = 5.0 \text{ V} \pm 10\%$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$)


Parameter	Symbol	Pin name	Value		Unit	Remarks
			Min	Max		
Reset input time	t_{RSTL}	$\overline{\text{RST}}$	500	—	ns	In normal operation
			Oscillation time of oscillator* + 100	—	μs	In stop mode
			100	—	μs	In timebase timer mode

* : Oscillation time of oscillator is the time to reach to 90% of the oscillation amplitude from stand still. In the crystal oscillator, the oscillation time is between several ms to tens of ms. In FAR/ceramic oscillator, the oscillation time is between hundreds of μs to several ms. In the external clock, the oscillation time is 0 ms.

- In normal operation mode

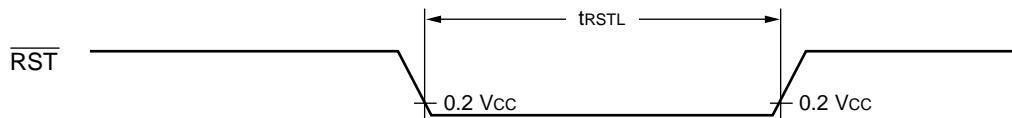


- In stop mode, at power on

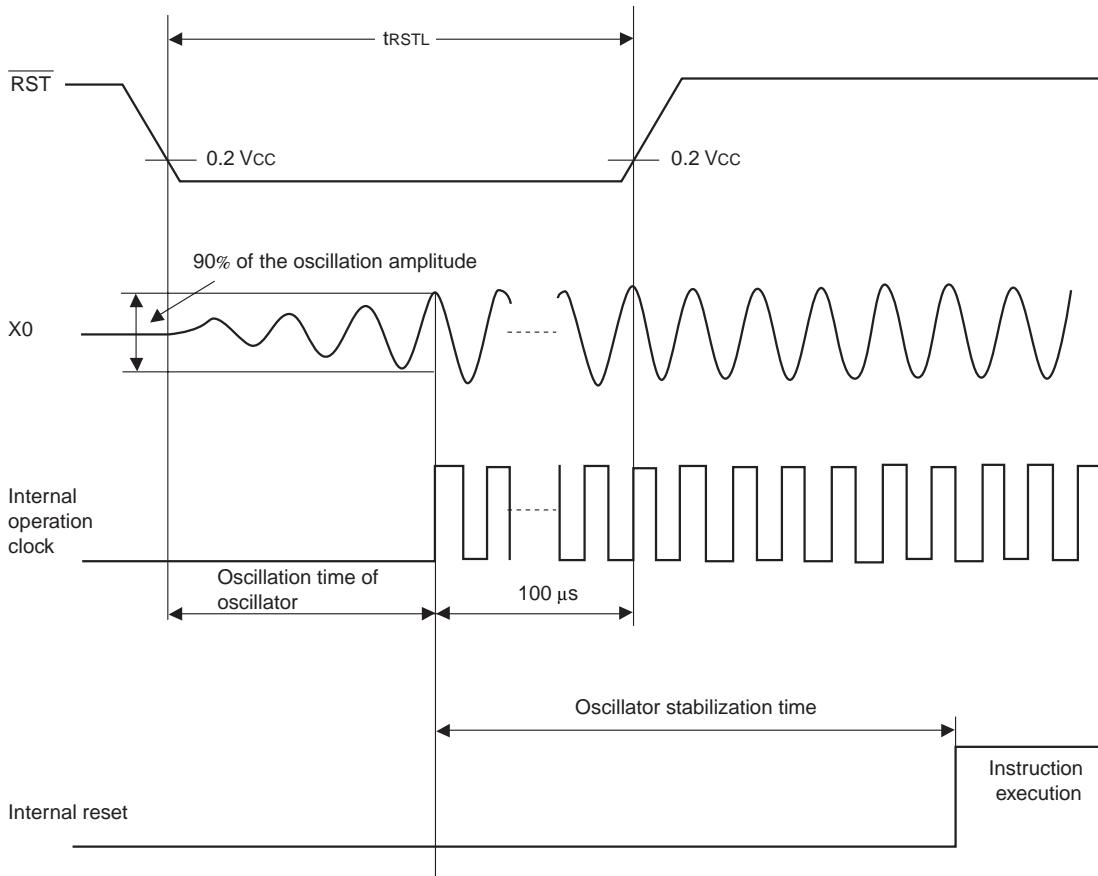

(3) Power-on Reset


($V_{CC} = 5.0 \text{ V} \pm 10\%$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$)

Parameter	Symbol	Pin name	Condition	Value		Unit	Remarks
				Min	Max		
Power supply rising time	t_R	V_{CC}	—	0.05	30	ms	
Power supply cut-off time	t_{OFF}	V_{CC}	—	1	—	ms	Waiting time for power supply on

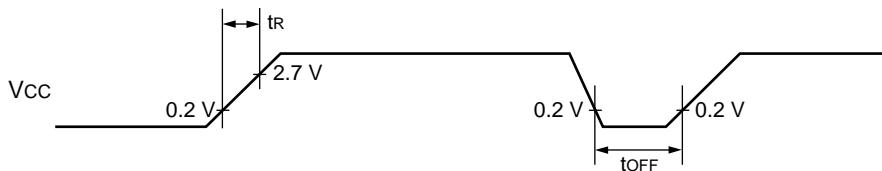

Note : Sudden changes in the power supply voltage may cause a power-on reset.

To change the power supply voltage while the device is in operation, be sure to set the slope of rising within 50 mV/ms or less as shown below.

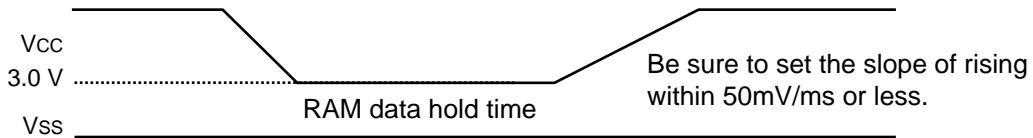

MB90820 Series


(4) UART0 and UART1

($V_{CC} = 5.0 \text{ V} \pm 10\%$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_A = -40 \text{ }^{\circ}\text{C}$ to $+85 \text{ }^{\circ}\text{C}$)


Parameter	Symbol	Pin name	Condition	Value		Unit	Remarks
				Min	Max		
Serial clock cycle time	tscyc	SCK0 to SCK1	$C_L = 80 \text{ pF} + 1 \text{ TTL}$ for an output pin of internal shift clock mode	8 t_{CP}	—	ns	
SCK ↓ → SOT delay time	tslov	SCK0 to SCK1 SOT0 to SOT1		-80	+ 80	ns	
Valid SIN → SCK ↑	tivsh	SCK0 to SCK1 SIN0 to SIN1		100	—	ns	
SCK ↑ → valid SIN hold time	tshix	SCK0 to SCK1 SIN0 to SIN1		60	—	ns	
Serial clock "H" pulse width	tschl	SCK0 to SCK1	$C_L = 80 \text{ pF} + 1 \text{ TTL}$ for an output pin of external shift clock mode	4 t_{CP}	—	ns	
Serial clock "L" pulse width	tslsh	SCK0 to SCK1		4 t_{CP}	—	ns	
SCK ↓ → SOT delay time	tslov	SCK0 to SCK1 SOT0 to SOT1		—	150	ns	
Valid SIN → SCK ↑	tivsh	SCK0 to SCK1 SIN0 to SIN1		60	—	ns	
SCK ↑ → valid SIN hold time	tshix	SCK0 to SCK1 SIN0 to SIN1		60	—	ns	

- Notes : • These are AC ratings in the CLK synchronous mode.
 • CL is the load capacitance value connected to pins while testing.
 • t_{CP} is machine cycle time (unit : ns).

- Internal shift clock mode

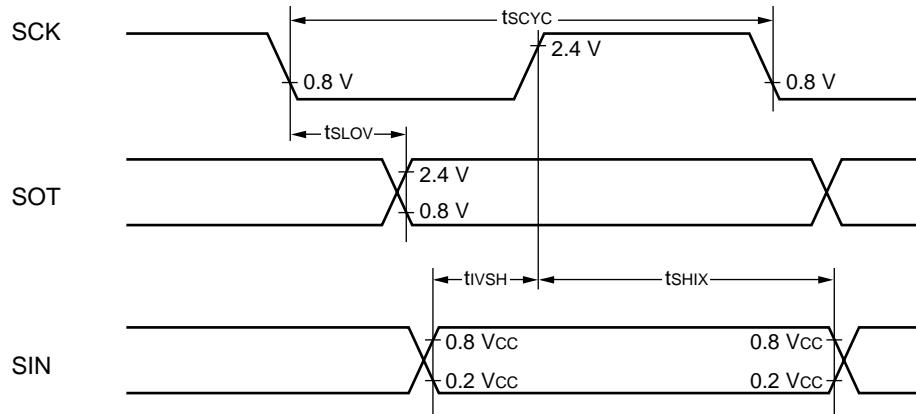

- External shift clock mode

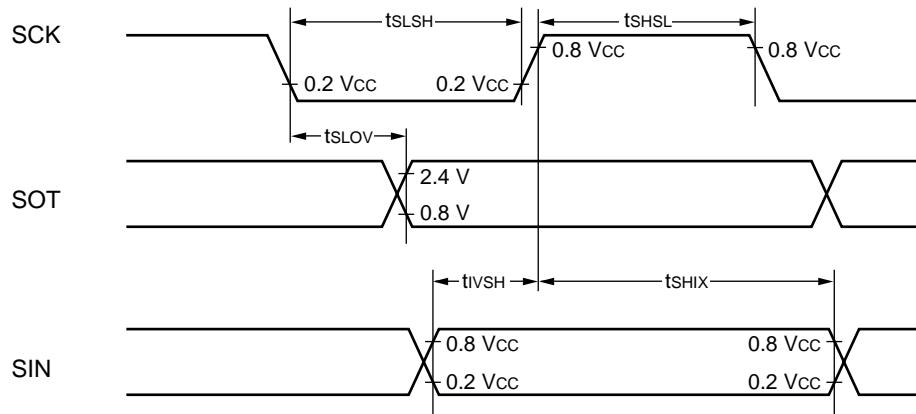


MB90820 Series

(5) Resources Input Timing

($V_{CC} = 5.0 \text{ V} \pm 10\%$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$)


Parameter	Symbol	Pin name	Condition	Value		Unit	Remarks
				Min	Max		
Input pulse width	t_{TIWH} t_{TIWL}	IN0 to IN3, TIN0 to TIN1, PWI0 to PWI1, DTTI	—	4 t_{CP}	—	ns	

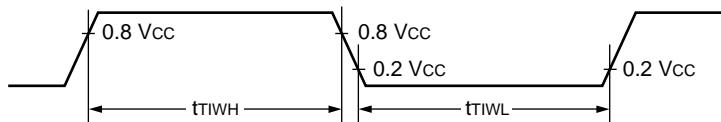

(6) Trigger Input Timing

($V_{CC} = 5.0 \text{ V} \pm 10\%$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$)

Parameter	Symbol	Pin name	Condition	Value		Unit	Remarks
				Min	Max		
Input pulse width	t_{TRGH} t_{TRGL}	INT0 to INT7	—	5 t_{CP}	—	ns	

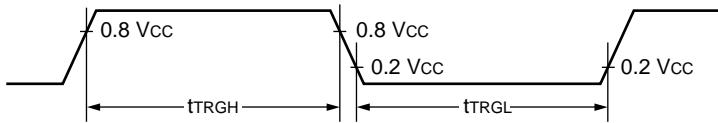

5. A/D Converter Electrical Characteristics

($3.0 \text{ V} \leq \text{AVR} - \text{AV}_{\text{ss}}, \text{V}_{\text{cc}} = \text{AV}_{\text{cc}} = 5.0 \text{ V} \pm 10\%, \text{V}_{\text{ss}} = \text{AV}_{\text{ss}} = 0.0 \text{ V}, T_{\text{A}} = -40 \text{ }^{\circ}\text{C} \text{ to } +85 \text{ }^{\circ}\text{C}$)

Parameter	Symbol	Pin name	Value			Unit	Remarks
			Min	Typ	Max		
Resolution	—	—	—	10	—	bit	
Total error	—	—	—	—	± 3.0	LSB	
Non-linearity error	—	—	—	—	± 2.5	LSB	
Differential linearity error	—	—	—	—	± 1.9	LSB	
Zero transition voltage	V_{OT}	AN0 to AN15	$\text{AV}_{\text{ss}} - 1.5 \text{ LSB}$	$\text{AV}_{\text{ss}} + 0.5 \text{ LSB}$	$\text{AV}_{\text{ss}} + 2.5 \text{ LSB}$	mV	
Full-scale transition voltage	V_{FST}	AN0 to AN15	$\text{AVR} - 3.5 \text{ LSB}$	$\text{AVR} - 1.5 \text{ LSB}$	$\text{AVR} + 0.5 \text{ LSB}$	mV	
Compare time	—	—	1.0	—	—	μs	$4.5 \text{ V} \leq \text{AV}_{\text{cc}} \leq 5.5 \text{ V}$
			2.0	—	—	μs	$4.0 \text{ V} \leq \text{AV}_{\text{cc}} < 4.5 \text{ V}$
Sampling time	—	—	0.5	—	—	μs	$4.5 \text{ V} \leq \text{AV}_{\text{cc}} \leq 5.5 \text{ V}$
			1.2	—	—	μs	$4.0 \text{ V} \leq \text{AV}_{\text{cc}} < 4.5 \text{ V}$
Analog port input current	I_{AIN}	AN0 to AN15	- 0.3	—	+ 0.3	μA	
Analog input voltage	V_{AIN}	AN0 to AN15	AV_{ss}	—	AVR	V	
Reference voltage	—	AVR	$\text{AV}_{\text{ss}} + 2.7$	—	AV_{cc}	V	
Power supply current	I_{A}	AV_{cc}	—	2.4	4.7	mA	
	I_{AH}		—	—	5	μA	*
Reference voltage supply current	I_{R}	AVR	—	600	900	μA	
	I_{RH}		—	—	5	μA	*
Offset between channels	—	AN0 to AN15	—	—	4	LSB	


* : The current when the A/D converter is not operating or the CPU is in stop mode (for $\text{V}_{\text{cc}} = \text{AV}_{\text{cc}} = \text{AVR} = 5.0 \text{ V}$)

Note : The error increases proportionally as $|\text{AVR} - \text{AV}_{\text{ss}}|$ decreases.

MB90820 Series

6. A/D Converter Glossary

- Resolution : Analog variation that is recognized by an A/D converter.
- Non linearity error : Deviation between a line across zero-transition line ("00 0000 0000"↔"00 0000 0001") and full-scale transition line ("11 1111 1110"↔"11 1111 1111") and actual conversion characteristics.
- Differential linearity error : Deviation of input voltage, which is required for changing output code by 1 LSB, from an ideal value
- Total error : Difference between an actual value and an ideal value. A total error includes zero transition error, full-scale transition error, and linear error.

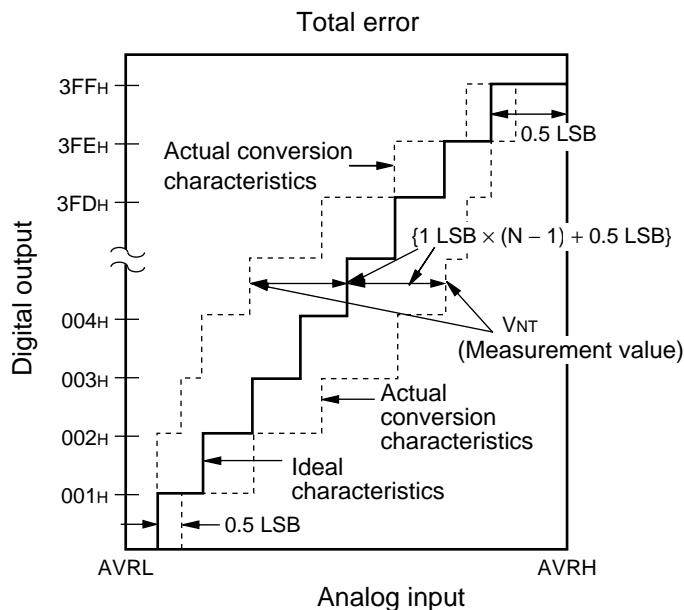

$$\text{Total error for digital output } N = \frac{V_{NT} - \{1 \text{ LSB} \times (N - 1) + 0.5 \text{ LSB}\}}{1 \text{ LSB}} \text{ [LSB]}$$
$$1 \text{ LSB} = (\text{Ideal value}) \frac{\text{AVR} - \text{AVss}}{1024} \text{ [V]}$$

N : A/D converter digital output value


$$V_{OT}(\text{Ideal value}) = \text{AVss} + 0.5 \text{ LSB} \text{ [V]}$$

$$V_{FST}(\text{Ideal value}) = \text{AVR} - 1.5 \text{ LSB} \text{ [V]}$$

V_{NT} : Voltage at which of digital output transitions from (N - 1) to N.

(Continued)

(Continued)

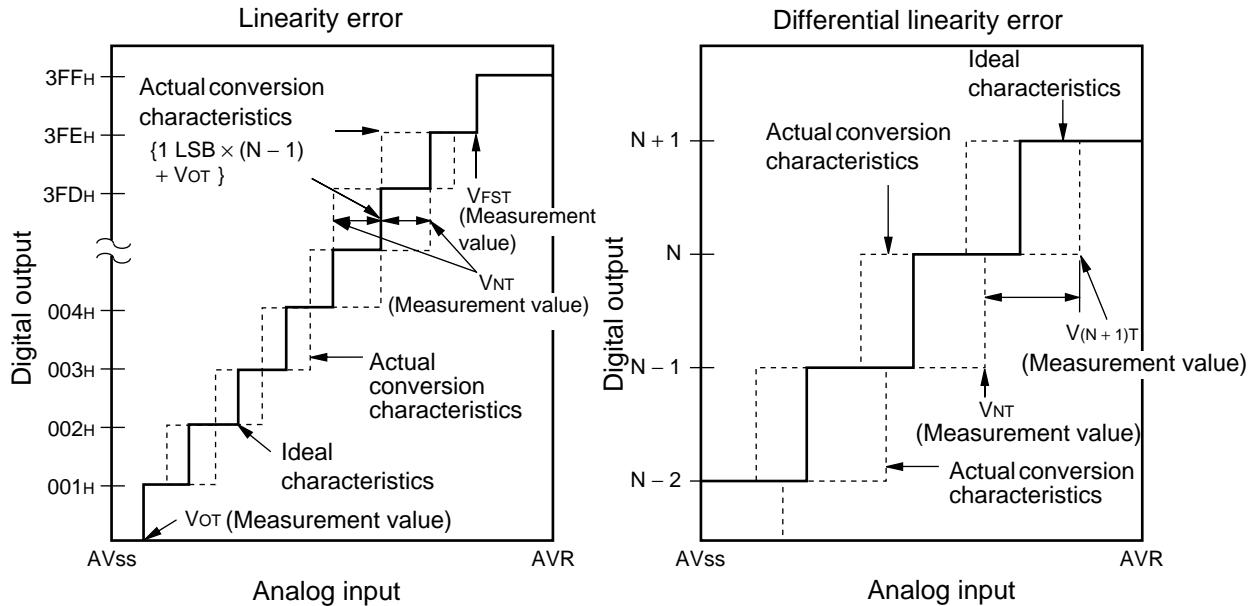

$$\text{Linearity error of digital output } N = \frac{V_{NT} - \{1 \text{ LSB} \times (N - 1) + V_{OT}\}}{1 \text{ LSB}} \text{ [LSB]}$$

$$\text{Differential linearity error of digital output } N = \frac{V_{(N+1)T} - V_{NT}}{1 \text{ LSB}} - 1 \text{ [LSB]}$$

$$1 \text{ LSB} = \frac{V_{FST} - V_{OT}}{1022} \text{ [V]}$$

N : A/D converter digital output value

V_{OT} : Voltage at which of digital output transmissions from "000_H" to "001_H".

V_{FST} : Voltage at which of digital output transmissions from "3FE_H" to "3FF_H".


MB90820 Series

7. Notes on Using A/D Converter

• About the external impedance of the analog input and its sampling time

- A/D converter with sample and hold circuit. If the external impedance is too high to keep sufficient sampling time, the analog voltage charged to the internal sample and hold capacitor is insufficient, adversely affecting A/D conversion precision. Therefore, to satisfy the A/D conversion precision standard, consider the relationship between the external impedance and minimum sampling time and either adjust the resistor value and operating frequency or decrease the external impedance so that the sampling time is longer than the minimum value. And if the sampling time cannot be sufficient, connect a capacitor of about 0.1 mF to the analog input pin.

- Analog input circuit model

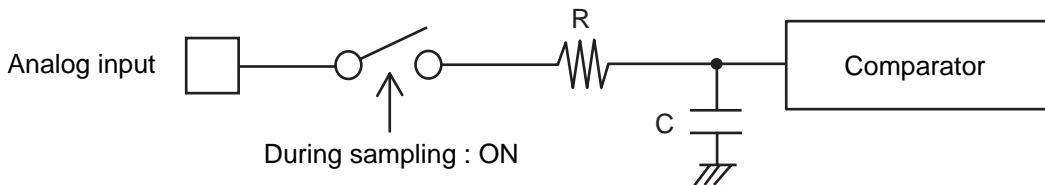


	R	C
MB90822/823	2.0 kΩ (Max)	14.4 pF (Max)
MB90F822A/F823A	2.0 kΩ (Max)	16.0 pF (Max)


Note : The values are reference values.

- The relationship between the external impedance and minimum sampling time

(External impedance = 0 kΩ to 100 kΩ)

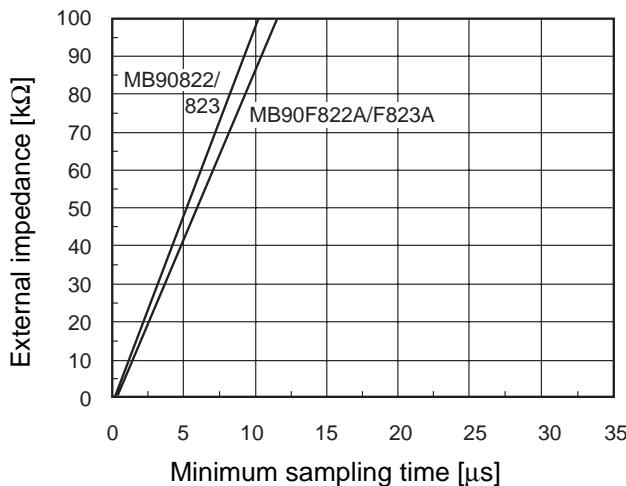

(External impedance = 0 kΩ to 20 kΩ)

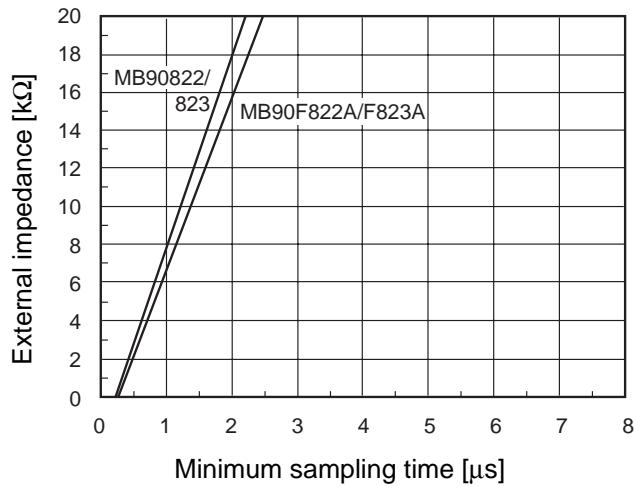

- About the error

The accuracy gets worse as $|AVR - AV_{SS}|$ becomes smaller.

8. Electrical Characteristics of D/A convertor

($V_{CC} = AV_{CC} = 4.5$ V to 5.5 V, $V_{SS} = AV_{SS} = 0.0$ V, $T_A = -40$ °C to +85 °C)

Parameter	Symbol	Pin name	Condition	Value			Unit	Remarks
				Min	Typ	Max		
Resolution	—	—	—	—	8	—	bit	
Differential linearity error	—	—	—	—	—	±0.5	LSB	
Conversion time	—	—	—	—	0.45	—	μs	*
Analog output impedance	—	—	—	—	2.9	3.8	kΩ	
Power supply current	I_{DVR}	AV_{CC}	—	—	160	920	μA	
	I_{DVRS}			—	0.1	—	μA	D/A stops

* : With load capacitance 20 pF.

MB90820 Series

9. Flash Memory Program/Erase Characteristics

Parameter	Condition	Value			Unit	Remarks
		Min	Typ	Max		
Sector erase time	$T_A = +25^\circ\text{C}$ $V_{CC} = 5.0\text{ V}$	—	1	15	s	Excludes programming prior to erasure
Chip erase time		—	9	—	s	Excludes programming prior to erasure
Word (16 bit width) programing time		—	16	3,600	μs	Except for the overhead time of the system
Program/Erase cycle	—	10,000	—	—	cycle	
Flash data retention time	Average $T_A = +85^\circ\text{C}$	20	—	—	year	*

* : This value comes from the technology qualification (using Arrhenius equation to translate high temperature measurements into normalized value at $+85^\circ\text{C}$) .

■ ORDERING INFORMATION

Part number	Package	Remarks
MB90F823APFV MB90F822APFV MB90822PFV MB90823PFV	80-pin Plastic LQFP (FPT-80P-M05)	
MB90F823APFM MB90F822APFM MB90822PFM MB90823PFM	80-pin Plastic LQFP (FPT-80P-M11)	
MB90F823APF MB90F822APF MB90822PF MB90823PF	80-pin Plastic QFP (FPT-80P-M06)	


■ PACKAGE DIMENSIONS

80-pin plastic QFP
(FPT-80P-M06)

Note 1) * : These dimensions do not include resin protrusion.

Note 2) Pins width and pins thickness include plating thickness.

Note 3) Pins width do not include tie bar cutting remainder.

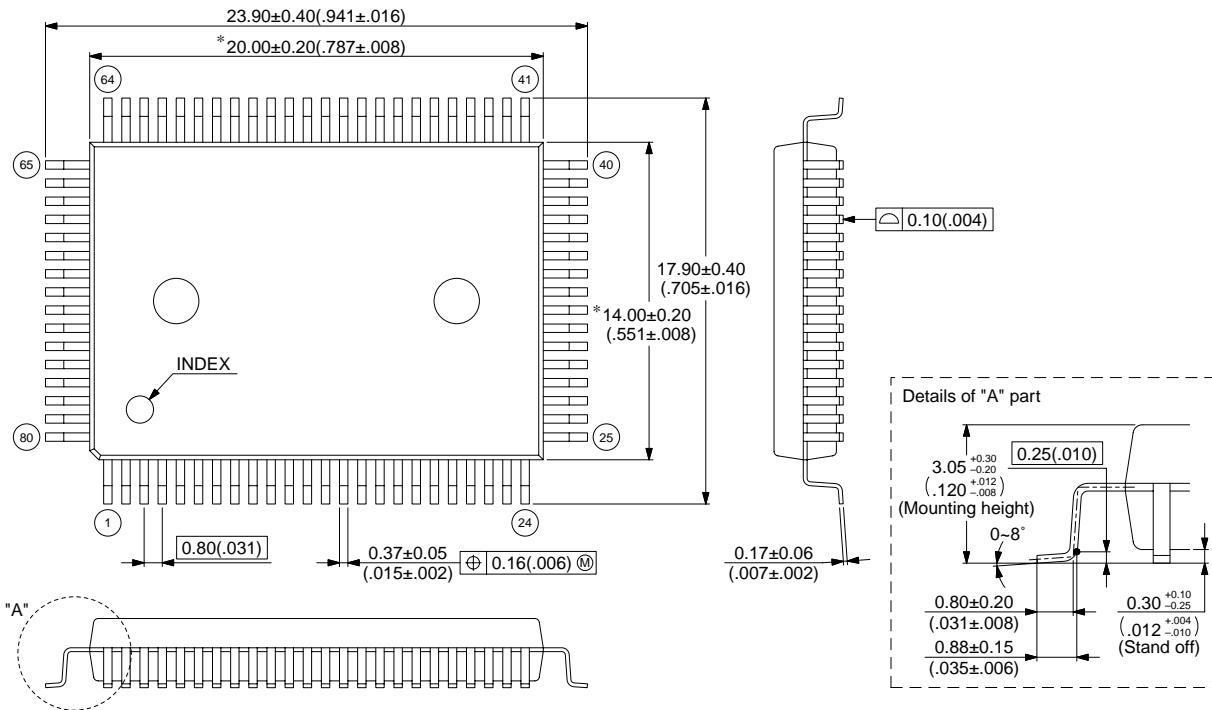

© 2002 FUJITSU LIMITED F80010S-c-5

Dimensions in mm (inches)


Note : The values in parentheses are reference values.

(Continued)

MB90820 Series

80-pin plastic LQFP
(FPT-80P-M11)

Note 1) * : These dimensions do not include resin protrusion.
Note 2) Pins width and pins thickness include plating thickness.
Note 3) Pins width do not include tie bar cutting remainder.

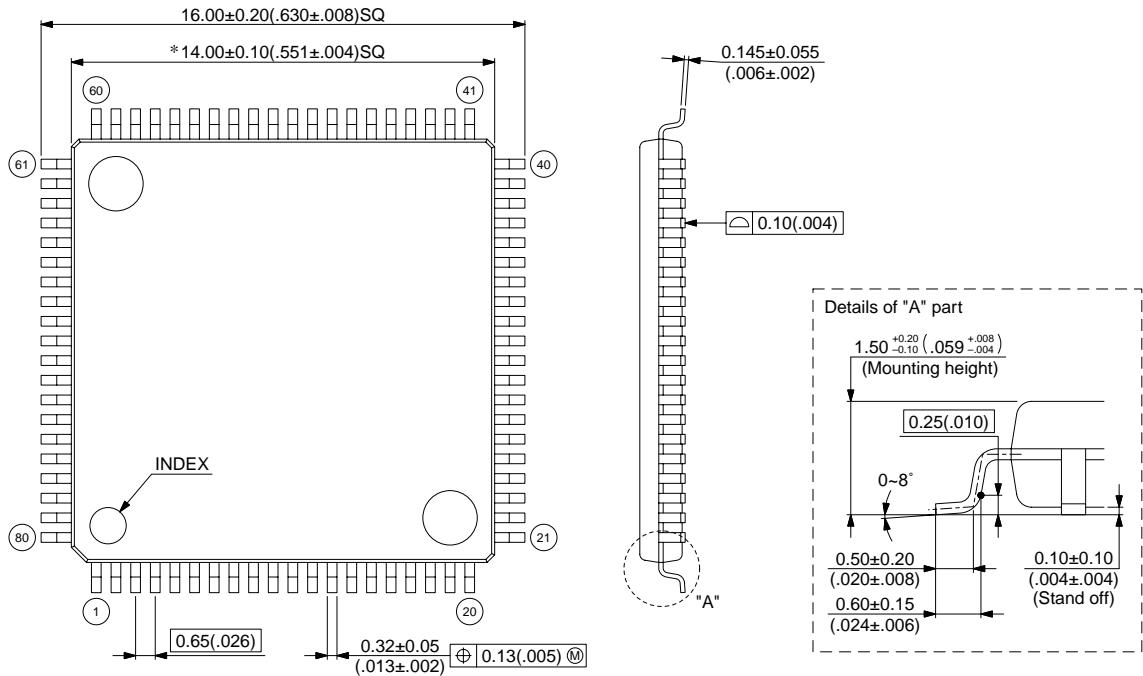

© 2003 FUJITSU LIMITED F80016S-c3-6

Dimensions in mm (inches)


Note : The values in parentheses are reference values.

(Continued)

(Continued)

80-pin plastic LQFP
(FPT-80P-M05)

- Note 1) * : These dimensions do not include resin protrusion.
- Note 2) Pins width and pins thickness include plating thickness.
- Note 3) Pins width do not include tie bar cutting remainder.

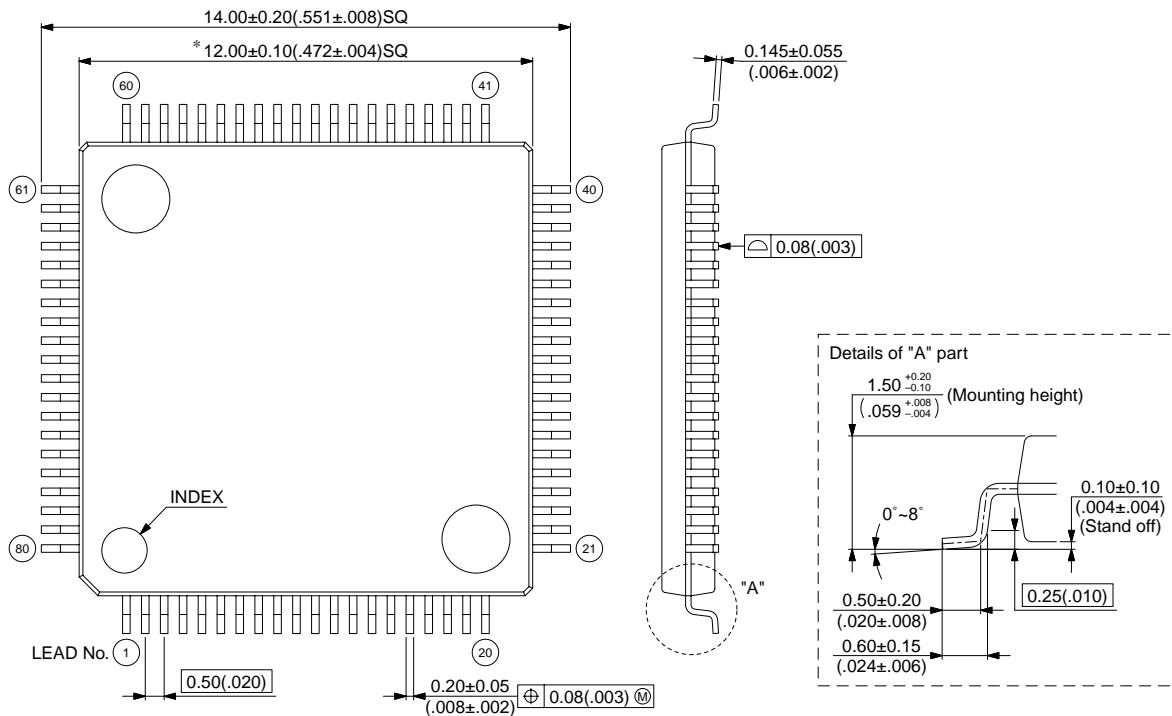

© 2003 FUJITSU LIMITED F80008S-c4-8

Dimensions in mm (inches)

Note : The values in parentheses are reference values.

MB90820 Series

The information for microcontroller supports is shown in the following homepage.
<http://www.fujitsu.com/global/services/microelectronics/product/micom/support/index.html>

FUJITSU LIMITED

All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU sales representatives before ordering.

The information, such as descriptions of function and application circuit examples, in this document are presented solely for the purpose of reference to show examples of operations and uses of Fujitsu semiconductor device; Fujitsu does not warrant proper operation of the device with respect to use based on such information. When you develop equipment incorporating the device based on such information, you must assume any responsibility arising out of such use of the information. Fujitsu assumes no liability for any damages whatsoever arising out of the use of the information.

Any information in this document, including descriptions of function and schematic diagrams, shall not be construed as license of the use or exercise of any intellectual property right, such as patent right or copyright, or any other right of Fujitsu or any third party or does Fujitsu warrant non-infringement of any third-party's intellectual property right or other right by using such information. Fujitsu assumes no liability for any infringement of the intellectual property rights or other rights of third parties which would result from the use of information contained herein.

The products described in this document are designed, developed and manufactured as contemplated for general use, including without limitation, ordinary industrial use, general office use, personal use, and household use, but are not designed, developed and manufactured as contemplated (1) for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could have a serious effect to the public, and could lead directly to death, personal injury, severe physical damage or other loss (i.e., nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system), or (2) for use requiring extremely high reliability (i.e., submersible repeater and artificial satellite).

Please note that Fujitsu will not be liable against you and/or any third party for any claims or damages arising in connection with above-mentioned uses of the products.

Any semiconductor devices have an inherent chance of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Law of Japan, the prior authorization by Japanese government will be required for export of those products from Japan.