



**POWER MATE
TECHNOLOGY CO.,LTD.**

DOS10-05T Non-isolated
DOH10-05T Point of load DC/DC converters

Model Name	ON/OFF Logic	Package	Input Voltage	Output Voltage	Output Current		Efficiency (%) 5.0Vin, 3.3Vdc@10A
					Min. Load	Max. Load	
DOS10-05T	Negative	SMD	2.4 ~ 5.5Vdc Vin(min.)=Vo(set)+0.5V	0.75 ~ 3.3Vdc	0A	10A	95%
DOH10-05T-P	Positive						
DOH10-05T	Negative						
DOH10-05T-P	Positive						
DOH10-05TA	Negative						
DOH10-05TA-P	Positive						

Note

1. BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment).
2. External with $C_{out} = 1\mu F$ ceramic//10 μF tantalum capacitors.
3. External with $C_{out} = 2 \times 150\mu F$ polymer capacitors.
4. Output voltage programmable from 0.75V to 3.3V by connecting a single resistor (shown as Rtrim in Table 1) between the TRIM and GND pins of the module. To calculate the value of the resistor **Rtrim** for a particular output voltage **Vo**, use the following equation:

$$R_{trim} = \left[\frac{21070}{V_o - 0.7525} - 5110 \right] \Omega$$

5. It's necessary to equip the external input capacitors at the input of the module. The capacitors should connect as close as possible to the input terminals that ensuring module stability. The external C_{in} is $3 \times 150\mu F$ low-ESR polymer capacitors // $2 \times 47\mu F$ ceramic capacitors at least.
6. Device code with suffix "-P" – Positive logic(On/Off is open collector/drain logic input; Signal referenced to GND)
Device code with no suffix – Negative logic (On/Off pin is open collector/drain logic input with external pull –up resistor; signal referenced to GND)
7. Case 1 :On/Off input is set to logic low (module on) and then input power is applied (delay from instant at which Vin=Vin(min) until Vo=10% of Vo(set))
8. Case 2 :Input power is applied for at least one second and then the On/Off input is set to logic low (delay form instant at which Von/off=0.3V until Vo=10% of Vo(set))

CAUTION: This power module is not internally fused. An input line fuse must always be used.

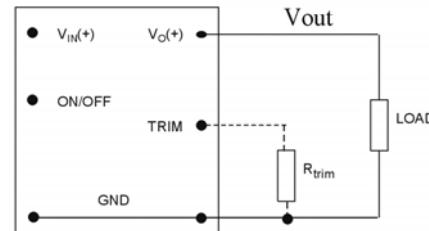
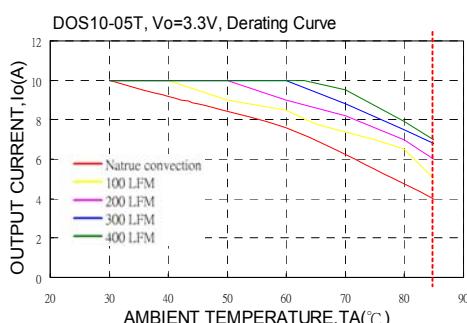


Fig. 1


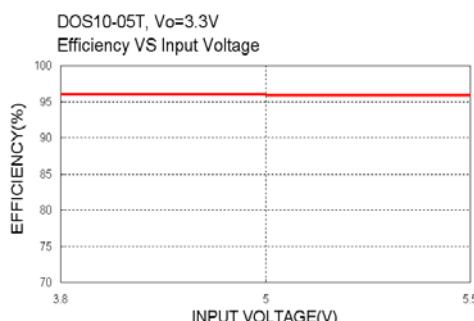


Table 1	
Vo(set) (V)	Rtrim (KΩ)
0.7525	Open
1.2	41.973
1.5	23.077
1.8	15.004
2.5	6.974
3.3	3.160



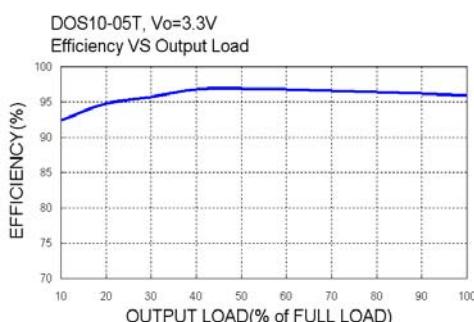


**POWER MATE
TECHNOLOGY CO.,LTD.**


DOS10-05T Non-isolated
DOH10-05T Point of load DC/DC converters

3 / 3


DOH10-05T

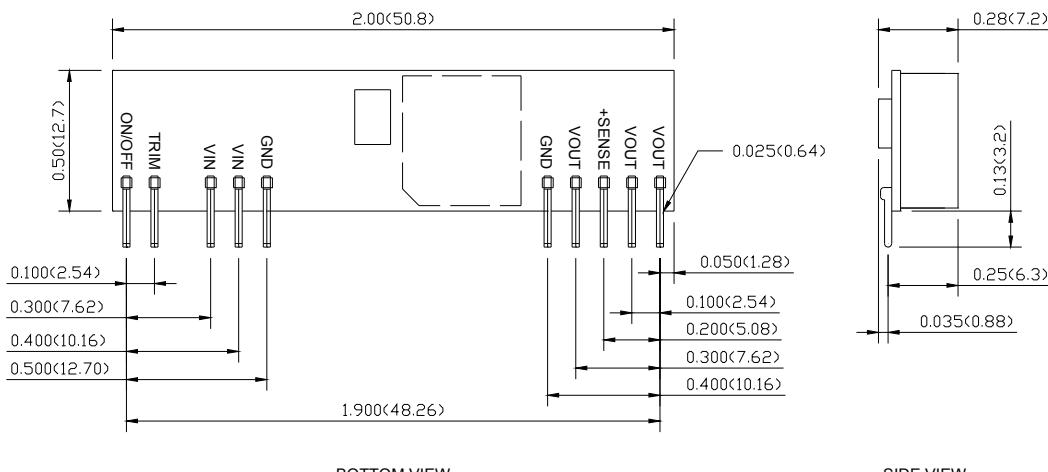

DOH10-05TA

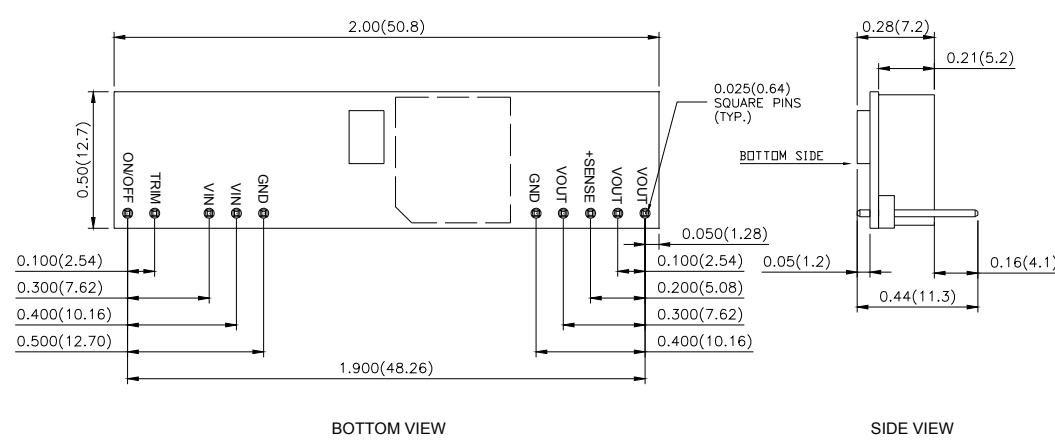

DOS10-05T

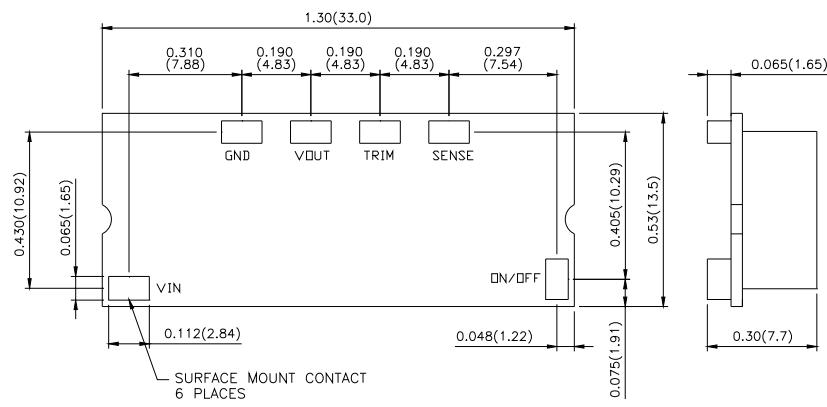

- All dimensions in Inches (mm)
Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
- Pin pitch tolerance ±0.01(0.25)
- Pin dimension tolerance ±0.004 (0.1)