

## Features:

- Leading Edge Power Density, 27W/in<sup>3</sup> in 1U Form Factor
- I<sup>2</sup>C Serial Bus and PMBus Interface
- Full Features Status & Control (Current, Voltage, AC OK, DC OK & Temperature OK),
- Active Current Sharing (Single Wire)
- Remote On/Off, Remote Sense, Voltage Program Circuits
- Microprocessor Based Design Allows for Automatic Fan Speed Control
- Optional Universal / 4-Bay 19" Rack Delivers 10kW of Power



| FEATURES                                       | BENEFITS  |
|--|---|
| High Power Density 27W/in <sup>3</sup>         | More system space for application circuits and hardware |
| Load Sharing & Fault Tolerant                  | Excellent reliability in N+1 operation                  |
| Automatic Fan Speed Control                    | Reduces audible noise and increases reliability         |
| System Scalability up to 10,000 Watts          | Allows flexibility with minimum investment              |
| Universal Input & International Certifications | Reduces logistical costs                                |

| KEY MARKET SEGMENTS & APPLICATIONS |                 |
|------------------------------------|-----------------|
| ■ Distributed Power                | ■ RF Amplifiers |
| ■ High End Servers                 | ■ ATE Equipment |
| ■ High End Routers and Switchgear  |                 |
| ■ Semiconductor Burn-in Equipment  |                 |

| SPECIFICATIONS              | 2500 Watt +48V Front End Power Supply   |
|-----------------------------|---|
| Input Voltage Range         | 90-264 VAC, 47-63 Hz  |
| Input Current Maximum       | 16A @ 180VAC, Full Load (max)   |
| Inrush Current              | 50A max. cold start (per ETS 300 132-1 and Bellcore specifications)   |
| Input Protection            | Dual Fused (Line & Neutral) 20 Amp / 250 VAC Type 3AB Axial   |
| Power Factor                | 0.99 typical complies with IEC555, EN60555-2, EN61000-3-2   |
| Efficiency                  | 92% typical at 230 VAC Full Load Operation (including OR'ing Mosfets)   |
| Output Power                | 2500W at High Line Operation (180-264 VAC), 1200W at Low Line Operation (90-132 VAC)  |
| Output Voltage Range        | +48 VDC (±10% with remote programming)  |
| Output Current              | 52A @48V  |
| Standby Bias Voltage        | 5VSB@1A, reference to Vout Return   |
| Voltage Regulation          | ±2% of Vnom for any combination of line, load and temperature   |
| Output Ripple & Noise       | Complies with ETS300 132-2, 32dBnrc. Bandwidth: 25Hz - 20kHz. 2mVrms pk-pk with 0.1µF ceramic and 10µF electrolytics caps at the output                             |
| Transient Response          | 5% max deviation Recovery time 300µs @ 50% load step and di/dt < 1A/µs  |
| Switching Frequency         | 200kHz (input) / 400kHz (output)  |
| Hold-Up Time                | 16.8msec (230 VAC full load)  |
| Remote On/Off               | ON if >3V or open; OFF if <1V (max. sink 1mA) Open collector type   |
| Current Limit Protection    | 110-130% of Iout nominal  |
| Short Circuit Protection    | Self protected with auto recovery   |
| Over Voltage Protection     | -60 VDC max, latched. Reset condition by recycling AC input or toggling remote on/off   |
| Operating Temperature       | -10°C to +70°C. power derating above 50°C at 2.5% per °C  |
| Over Temperature Protection | Non latching; protection active at 110°C internal temperature, restart at 95°C (typical)  |
| EMI                         | FCC-B & EN55022-B with specified filter or at rack level, GR-1089-CORE  |
| LED Indicators              | Green = AC OK & DC OK, Red = Fault  |
| Analog Status & Control     | Voltage Programming (V Prog), Load sharing (I Share), Remote On/Off, Current Monitor (I Monitor), Over temperature (Temp Warning), Fault, PS Present, Module Enable |
| Digital Status & Control    | I <sup>2</sup> C Option and PMBus Option, see detailed specification for details  |
| Shock & Vibration           | IEC68-2-27, MIL-STD-810E, Telcordia GR-63-CORE  |
| Dimensions                  | 14.25 x 4.00 x 1.65" / 362 x 102 x 41.9mm   |
| Weight                      | 4.73lbs / 2.15kg  |
| Safety Approvals            | IEC/UL/CSA/EN60950-1, CE Mark (LVD), TUV  |
| Options                     | I <sup>2</sup> C Interface, PMBus, Bezel, 5VSB Output   |

rev 100506

[www.lineagepower.com/om](http://www.lineagepower.com/om)

### Lineage Power

3000 Skyline Dr.  
Mesquite, TX 75149  
Phone: (972) 284-2000


### Lineage Power

2841 Dow Avenue  
Tustin, CA 92780 USA  
Phone: (714) 544-6665

### Lineage Power (China)


1353 Chenqiao Road, Shanghai Sengpu Industrial Park  
Shanghai, 201401 China  
Phone: 021 6710 8910

## OUTLINE DRAWING

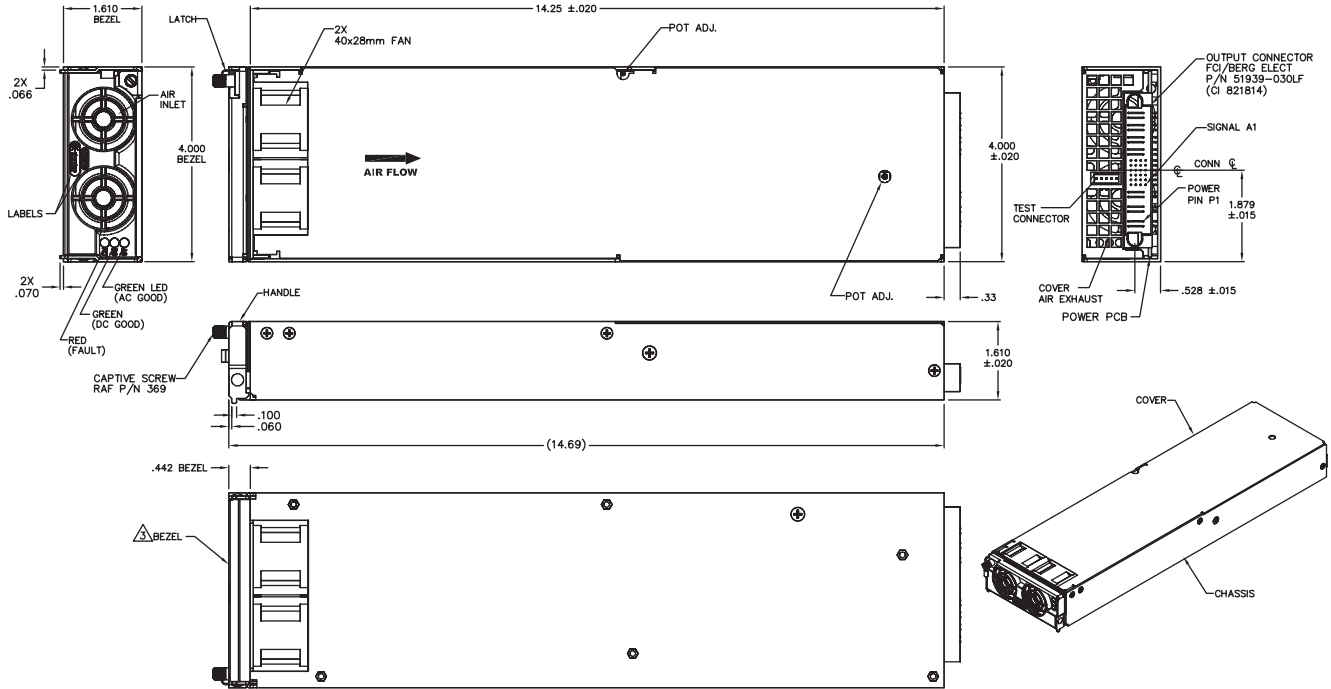

All Dimensions in Inches (mm)  
Tolerance: .XX = ± .02 in (.50 mm)  
.XXX = ± .010 in (.254 mm)

## PART NUMBER DEFINITION GUIDE:

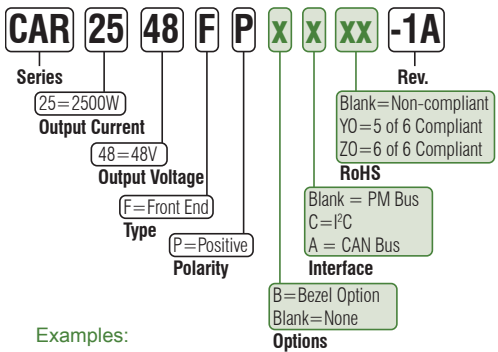


Examples:

CAR2548FPBCZO-1A  
2500W/48V Front End, Bezel, I<sup>2</sup>C, 6 of 6 RoHS

CAR2548FPBAZO-1A  
2500W/48V Front End, Bezel, CAN Bus 6 of 6 RoHS compliance

## CONNECTOR DRAWING:

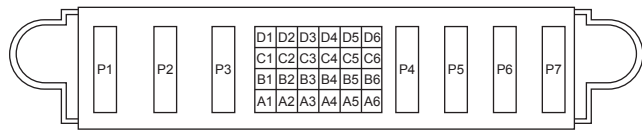

Connector FCI Berg P/N 51939-030  
Mating connector FCI Berg P/N 51915-051

## PIN OUT INFORMATION

|    |                  |    |                   |    |                |    |             |
|----|------------------|----|-------------------|----|----------------|----|-------------|
| A1 | VSB 3.3V         | B4 | Module Enable     | D1 | V Prog         | P4 | Vout        |
| A2 | VSB 3.3V Return  | B5 | Serial Data Line  | D2 | OVP Test Point | P5 | Vout        |
| A3 | Signal RTN       | B6 | Serial Data Clock | D3 | Remote On/Off  | P6 | Vout Return |
| A4 | Write Protect    | C1 | I Share           | D4 | DC OK          | P7 | Vout Return |
| A5 | Remote Sense (+) | C2 | Protocol Select   | D5 | AC OK          |    |             |
| A6 | Remote Sense (-) | C3 | Temp Warning      | D6 | Interrupt      |    |             |
| B1 | Fault            | C4 | I2C Address (A0)  | P1 | Line           |    |             |
| B2 | I Monitor        | C5 | I2C Address (A1)  | P2 | Neutral        |    |             |
| B3 | PS Present       | C6 | I2C Address (A2)  | P3 | Chassis        |    |             |