

March 1993

Description

NEC's Analog Master families (CHS, V-CHS, M-CHS Series) are bipolar linear arrays for developing analog circuits operating up to radio frequencies (RF). Analog Masters allow integrating numerous analog functions onto a single chip. This is accomplished by means of connecting up, in series or parallel, arrays of NPN/PNP transistors, on-chip resistors and MOS capacitors to form useful analog functions. These ASIC circuits are ideal for applications in multimedia, telecommunications or test and measurement where low power, compact and high speed circuits are desired.

Analog Master products are fully supported by NEC's advanced ASIC design technology. Various dedicated design and development tools and services available for designing these circuits. The CHS, V-CHS, M-CHS libraries provide various and commonly used analog functions at various power and drive levels.


Features

- ☐ Analog signal processing up to RF frequencies
- ☐ High frequency operations:
 - f_T up to 7 GHz for NPN transistors;
 - f_T up to 1 GHz for PNP transistors (V-CHS)
- ☐ Excellent h_{FE} characteristics
- ☐ High frequency bipolar process technology
- ☐ On-chip polysilicon resistors and low parasitic capacitances
- ☐ Powerful block library of analog functions
- ☐ High voltage operation up to 44V (M-CHS)
- ☐ DIP, S-DIP, SOP and QFP packages available
- ☐ Hardware simulation using TEG (Test Element Group) basic blocks

Publications

This data sheet contains preliminary specifications, package information, and operational data for the CHS, V-CHS and M-CHS Analog Master families. Additional design information is available in the CHS Block Library (TBD) and Design Manual (Doc. No. 70162); V-CHS Design Manual (Doc. No. 70135); and M-CHS Block Library (TBD) and Design Manual (Doc. No. 70164). Contact your local NEC Design Center or the NEC Literature Center for further Analog Master design information; see the back of this data sheet for locations and phone numbers.

Figure 1. Typical Analog Master Die

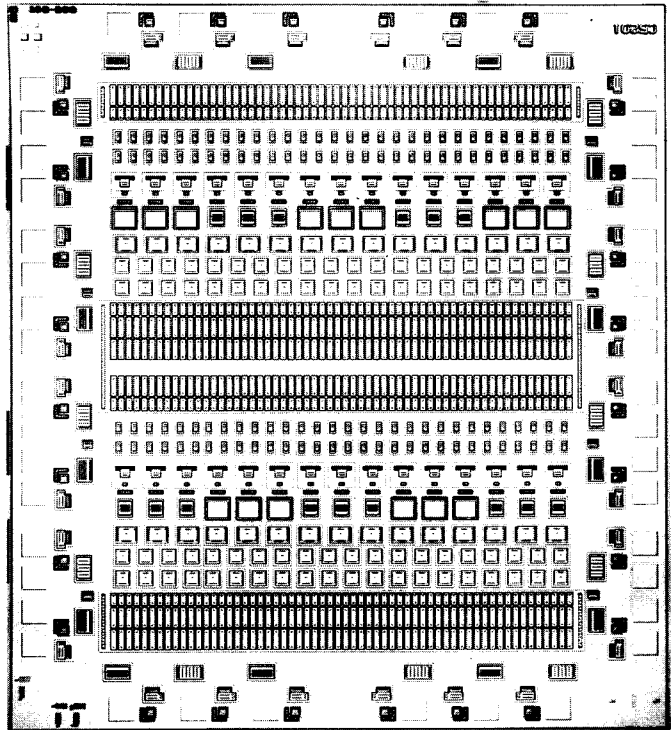

Analog Master Sizes

Device (μ PC)	Total Elements	Maximum Available*			I/O Pads (Max.)
		Transistors	Resistors	Capacitors	
CHS Devices					
5020	1628	484	1116	28	28
5021	2328	688	1600	40	32
5022	3042	892	2098	52	50
5023	727	245	468	14	22
5024	6152	1508	4560	84	80
V-CHS Devices					
5102	1367	251	1090	26	24
M-CHS Devices					
5200	658	189	456	9	24
5201	1038	303	712	15	28
5202	1799	535	1225	27	40
5203	3104	932	2108	48	52
5204	4578	1382	3108	72	62


*An Analog Master circuit should be designed so that no more than 70% of the elements are used. Even with 70% usage, routing may not be able to be completed, depending on the layout of the chip and the number of pin-pairs used.

Circuit Architecture

Analog Master products are built with NEC's high frequency, precision bipolar process technology. As shown in figure 2, bipolar array master chips are divided into pad and internal areas. The pad area contains pads and protection circuits that isolate the internal elements from high-energy external signals. The internal area is

an array of pre-diffused basic elements, NPN transistors, PNP transistors, resistors and capacitors. The circuit is configured by connecting desired elements together with automated CAD tools, using a design flow similar to gate arrays.

Figure 2. Analog Master Chip with Major Elements Defined

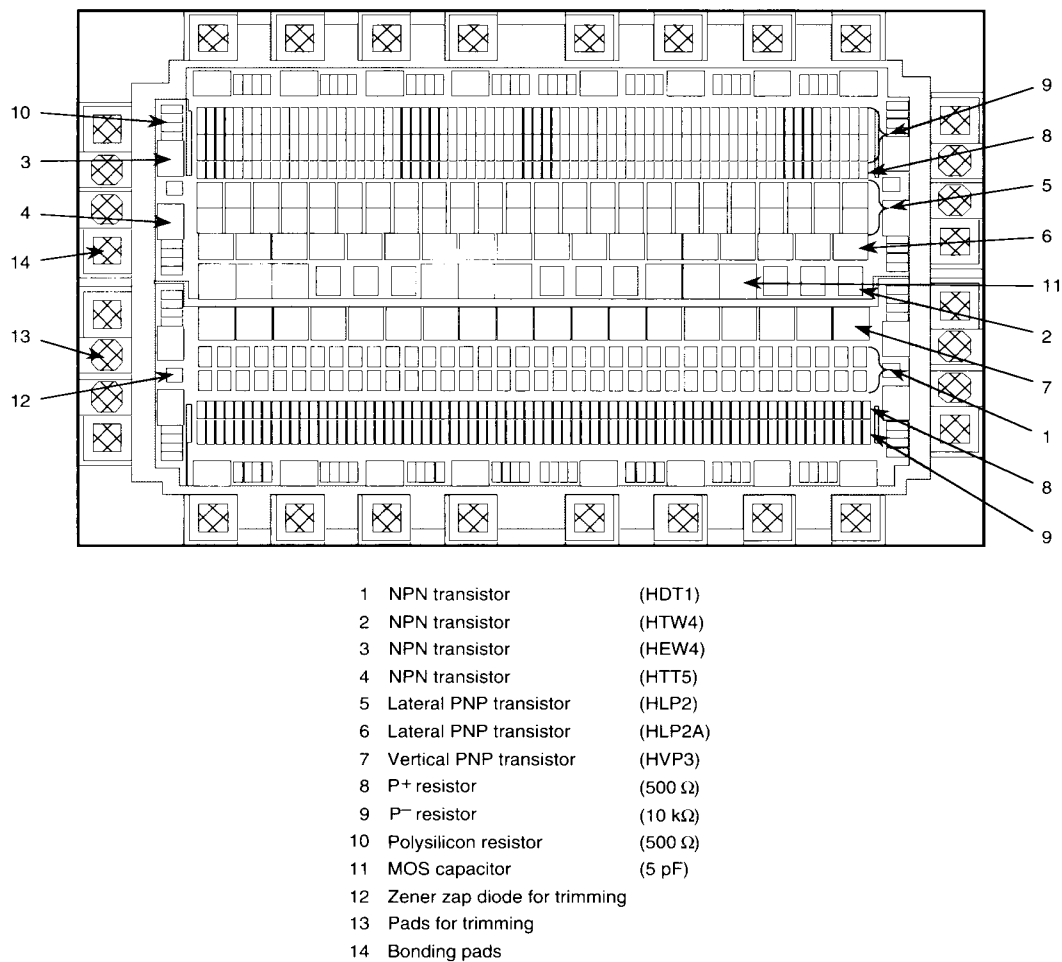

83FM-9321B

Absolute Maximum Ratings

Parameters	Symbol	Ratings	Unit	Family
Supply voltage	V_{CC}	14	V	CHS
		44	V	M-CHS
		11	V	V-CHS
Operating temperature	T_{OPT}	-30 to +85	°C	
Storage temperature	T_{STG}	-55 to +125	°C	

Capacitor Characteristics

Family	Unit Capacitor	Absolute Accuracy	Relative* Accuracy
CHS	5 pF	±15%	±2%
V-CHS	5 pF	±15%	±2%
M-CHS	5 pF	±15%	±2%

*In close juxtaposition

Resistor Characteristics

Family	Unit Resistor	Resistor Type	Absolute Accuracy	Relative* Accuracy
CHS	500	ion-injected	±15%	±2%
	5K	ion-injected	±15%	±2%
	2.5k	ion-injected	±20%	±3%
	3k	ion-injected	±20%	±3%
V-CHS	500	ion-injected	±15%	±2%
	5k	ion-injected	±15%	±2%
	200	ion-injected	±20%	±3%
	1k	ion-injected	±20%	±3%
M-CHS	500	ion-injected	±15%	±2%
	10k	ion-injected	±15%	±2%
	500	ion-injected	±20%	±3%

*In close juxtaposition

Analog Master CHS Family

Table 1 Product Outline

CHS Master Slice			μPC5020	μPC5021	μPC5022	μPC5023	μPC5024	Conditions
Process			High Frequency Bipolar					CHS-process
Max Supply Voltage			14V					
Number of Pads			28	32	50	22	80	
Total Number of Elements			1628	2328	3042	727	6125	
	Transistor Elements		484	688	892	245	1508	
	NPN Type	CHT1	224	320	416	112	672	I _C max. = 2 mA*
		CTW4	28	40	52	13	84	I _C max. = 18 mA
		CEW4	8	8	8	4	80	I _C max. = 18 mA
	PNP Type	CLP1	168	240	312	84	504	I _C max. = 0.05 mA, lateral
		CVP1	56	80	104	32	168	I _C max. = 0.5 mA, vertical
	Number of Resistors		1116	1600	2098	468	4560	
	Ohmic value	500 ohms	544	784	1024	224	1664	Ion-injected resistor (P ⁺)
		5k ohms	544	784	1024	200	2496	Ion-injected resistor (P ⁻)
		2.5k ohms	28	32	50	—	—	Polysilicon resistor
		3k ohms	—	—	—	44	400	Polysilicon resistor
	Capacitors (5 pF)		28	40	52	14	84	MOS Capacitor

* $I_{C\text{ MAX}}$: Collector current value at which the DC amplification factor (h_{FE}) drops 30% from the peak

Table 2 Typical CHS Transistor Electrical Characteristics

Parameter		Symbol	NPN Transistors			PNP Transistors		Conditions
			CHT1	CTW4	CEW4	CLP1	CVP1	
Absolute Maximum Ratings	Collector-Base Voltage	V_{CBO}	25 V	25 V	25 V	-25 V	-25 V	$T_A = 25^\circ\text{C}$
	Collector-Emitter Voltage	V_{CEO}	14 V	14 V	14 V	-14 V	-14 V	
	Emitter-Base Voltage	V_{EBO}	3 V	2 V	2 V	-25 V	-6 V	
	Collector Current	I_C	4 mA	18 mA	18 mA	-4 mA	-1 mA	
Electrical Charac- teristics	DC Amplification Factor	h_{FE}	100	100	100	250	75	NPN: $I_C = 500\text{ }\mu\text{A}$ PNP: $I_C = 10\text{ }\mu\text{A}$
	Collector Current	$I_{C\text{ MAX}}$	2 mA	18 mA	18 mA	-50 μA	-0.5 mA	h_{FE} is 30 % down
	Gain Bandwidth Product	f_T	4.5 GHz	6 GHz	6 GHz	7 MHz	280 MHz	$V_{CE} = 3.0\text{ V}$
	DC Emitter-Base Voltage	V_{BE}	0.81 V	0.75 V	0.71 V	-0.66 V	-0.69 V	NPN: $I_C = 500\text{ }\mu\text{A}$ PNP: $I_C = 10\text{ }\mu\text{A}$
	Input Voltage Noise ($\text{nV} / \sqrt{\text{Hz}}$)	e_N	3.1	1.9	2.4	5.5	6.0	NPN: $I_C = 100\text{ }\mu\text{A}$ PNP: $I_C = 10\text{ }\mu\text{A}$
			2.8	0.95	2.4	3.1	3.2	NPN: $I_C = 1\text{ mA}$ PNP: $I_C = 50\text{ }\mu\text{A}$
	Input Current Noise ($\text{pA} / \sqrt{\text{Hz}}$)	i_N	0.67	0.63	0.45	0.2	0.26	NPN: $I_C = 100\text{ }\mu\text{A}$ PNP: $I_C = 10\text{ }\mu\text{A}$
			2.8	2.0	2.0	0.9	1.0	NPN: $I_C = 1\text{ mA}$ PNP: $I_C = 50\text{ }\mu\text{A}$

Analog Master V-CHS Family

Table 3 Product Outline

V-CHS Master Slice			μ PC5102				Conditions
Process			High Frequency Bipolar				V-CHS
Max Supply Voltage			11V				
Number of Pads			24				
Configuration			Total	Blocks			
				High Freq.	Power	Other Types	
Elements			1367	218 x 5	251	26	
Transistors			251	38 x 5	61		
NPN	FDT2	115	17 X 5	30			I_C max. = 1.6 mA ^{Note 1}
	FDT4	30	6 X 5	0			I_C max. = 3.2 mA
	FTT4	37	6 X 5	7			I_C max. = 6.4 mA
	FEW5	4	0	4			I_C max. = 18 mA ^{Note 2}
PNP	FLP1	20	0	20			I_C max. = 32 μ A, lateral
	FVP1	45	9 X 5	0			I_C max. = 1.0 mA, vertical
Resistors			1090	180 X 5	190		
	500 ohms	200	28 X 5	60			Ion-injected resistor (P ⁺)
	5 k ohms	330	42 X 5	120			Ion-injected resistor (P ⁻)
	200 ohms	360	70 X 5	10			Polysilicon resistor
	1 k ohms	200	40 x 5	0			Polysilicon resistor
Capacitors (5 pF)			26	0	0	26	MOS Capacitor

Notes: 1. $I_{C\text{MAX}}$: Collector current value at which the DC amplification factor (h_{FE}) drops 30% from the peak

2. In addition to these transistors, two diodes are also connected near each bonding pad for absorbing static electricity

Table 4 Typical V-CHS Transistor Electrical Characteristics

Parameter		Symbol	NPN Transistors				PNP Transistors		Conditions
			FDT2	FDT4	FTT4	FEW5	FLP1	FVP1	$T_A = 25^\circ\text{C}$
Absolute Maximum Ratings	Collector-Base Voltage	V_{CBO}	20 V	20 V	20 V	20 V	-20 V	-20 V	
	Collector-Emitter Voltage	V_{CEO}	11 V	11 V	11 V	11 V	-11 V	-11 V	
	Emitter-Base Voltage	V_{EBO}	2.5 V	2.5 V	2 V	2 V	-22 V	-8 V	
	Collector Current	I_C	3.2mA	3.2mA	6.4mA	18mA	-3.2mA	-1.5mA	
Electrical Characteristics	DC Amplification Factor	h_{FE}	100	100	100	100	100	50	NPN: $I_C = 500 \mu\text{A}$ PNP: $I_C = 1 \mu\text{A}$ (FLP1) $I_C = 10 \mu\text{A}$ (FVP1)
	Collector Current	$I_{C\text{MAX}}$	1.6mA	3.2mA	6.4mA	18mA	-32mA	-1.0mA	h_{FE} is 30 % down
	Gain Bandwidth Product	f_T	6 GHz	7 GHz	6.5 GHz	6.5 GHz	7 MHz	1 GHz	$V_{CE} = 3.0 \text{ V}$
	DC Emitter-Base Voltage	V_{BE}	0.82 V	0.78 V	0.76 V	0.76 V	-0.67 V	-0.68 V	NPN: $I_C = 500 \mu\text{A}$ PNP: $I_C = 10 \mu\text{A}$
	Input Voltage Noise (nV / $\sqrt{\text{Hz}}$)	e_N	2.0	1.8	1.6	2.1	5.0	5.0	NPN: $I_C = 100 \mu\text{A}$ PNP: $I_C = 10 \mu\text{A}$
			1.8	0.95	0.8	1.7	3.3	3.0	NPN: $I_C = 1 \text{ mA}$ PNP: $I_C = 50 \mu\text{A}$
	Input Current Noise (pA / $\sqrt{\text{Hz}}$)	i_N	0.55	0.55	0.55	0.55	0.21	0.33	NPN: $I_C = 100 \mu\text{A}$ PNP: $I_C = 10 \mu\text{A}$
			2.5	2.5	2.5	2.5	0.8	1.2	NPN: $I_C = 1 \text{ mA}$ PNP: $I_C = 50 \mu\text{A}$

Analog Master M-CHS Family
Table 5 Product Outline

M-CHS Master Slice			μPC5200	μPC5201	μPC5202	μPC5203	μPC5204	Conditions
Process			High Frequency, High Breakdown Bipolar					M-CHS-process
Max Supply Voltage			44V					
Number of Pads			24	28	40	52	62	
Total Number of Elements			658	1038	1799	3104	4578	
	Transistor Elements		189	303	535	932	1382	
	NPN Type	HDT1	72	120	216	384	576	I _C max. = 1 mA*
		HTW4	9	15	27	48	72	I _C max. = 10 mA
		HEW4	12	14	20	26	31	I _C max. = 10 mA
		HTT5	12	14	20	26	31	I _C max. = 18 mA
	PNP Type	HLP2	48	80	144	256	384	I _C max. = 0.12 mA
		HLP2A	18	30	54	96	144	I _C max. = 0.12 mA
		HVP3	18	30	54	96	144	I _C max. = 0.12 mA
	Number of Resistors		456	712	1225	2108	3108	
	Ohmic value	500 ohms	144	240	426	760	1144	Ion-injected resistor (P ⁺)
		10k ohms	216	360	639	1140	1716	Ion-injected resistor (P ⁻)
		500 ohms	91	112	160	208	248	Polysilicon resistor
	Capacitors (5 pF)		9	15	27	48	72	MOS Capacitor
Trimming (Zap) diodes		4	8	12	16	16	Zener diodes	

* $I_{C\text{MAX}}$: Collector current value at which the DC amplification factor (h_{FE}) drops 30% from the peak

Table 6 Typical M-CHS Transistor Electrical Characteristics

Parameter		Symbol	NPN Transistors				PNP Transistors			Conditions
			HDT1	HDW4	HEW4	HTT5	HLP2	HLP2A	HVP3	$T_A = 25^\circ\text{C}$
Absolute Maximum Ratings	Collector-Base Voltage	V_{CBO}	44 V	44 V	44 V	44 V	-44 V	-44 V	-44 V	
	Collector-Emitter Voltage	V_{CEO}	44 V	44 V	44 V	44 V	-44 V	-44 V	-44 V	
	Emitter-Base Voltage	V_{EBO}	5 V	5 V	5 V	5 V	-16.5 V	-16.5 V	-16.5 V	
	Collector Current	I_C	4 mA	18 mA	18 mA	18 mA	-1 mA	-1 mA	-1 mA	
Electrical Charac- teristics	DC Amplification Factor	$h_{FE(MIN)}$	50	50	50	50	50	50	50	NPN: $I_C = 500 \mu\text{A}$ PNP: $I_C = 10 \mu\text{A}$
		$h_{F(TYP)}$	100	100	100	100	100	100	100	
		$h_{FE(MAX)}$	200	200	200	200	200	200	200	
	Collector Current	$I_{C\text{MAX}}$	1 mA	10 mA	10 mA	18 mA	-0.12mA	-0.12mA	-1mA	h_{FE} is 30 % down
	Gain Bandwidth Product	f_T	2 GHz	2 GHz	2 GHz	2 GHz	2 MHz	2 MHz	50 MHz	$V_{CE} = 3.0 \text{ V}$
	DC Emitter-Base Voltage	V_{BE}	0.74 V	0.67 V	0.67 V	0.65 V	0.67 V	0.67 V	0.64 V	NPN: $I_C = 100 \mu\text{A}$ PNP: $I_C = 10 \mu\text{A}$
		V_{BE}	0.76 V	0.69 V	0.69 V	0.67 V	0.69 V	0.69 V	0.66 V	
		V_{BE}	0.78 V	0.71 V	0.71 V	0.69 V	0.71 V	0.71 V	0.68 V	
	Input Voltage Noise (nV / $\sqrt{\text{Hz}}$)	e_N	3.8	1.6	2.2	1.5	5	5	5	NPN: $I_C = 100 \mu\text{A}$ PNP: $I_C = 10 \mu\text{A}$
			3.8	1.2	2.0	1.0	3.4	2.2	2.7	NPN: $I_C = 1 \text{ mA}$ PNP: $I_C = 50 \mu\text{A}$
	Input Current Noise (pA / $\sqrt{\text{Hz}}$)	i_N	0.7	0.5	0.6	0.5	0.26	0.26	0.3	NPN: $I_C = 100 \mu\text{A}$ PNP: $I_C = 10 \mu\text{A}$
			3.8	1.8	2.0	2.3	0.7	0.7	0.7	NPN: $I_C = 1 \text{ mA}$ PNP: $I_C = 50 \mu\text{A}$

Package Plan

Analog Master Family μPCxxxx		CHS					V-CHS		M-CHS				
		-5020	-5021	-5022	-5023	-5024	-5102		-5200	-5201	-5202	-5203	-5204
Dual in Line (DIP)													
8-pin	(300 mil)	A	A	—	A	—	A		A	—	—	—	—
14-pin	(300 mil)	—	—	—	A	—	A		A	—	—	—	—
16-pin	(300 mil)	—	—	—	A	—	A		A	—	—	—	—
18-pin	(300 mil)	—	—	—	A	—	A		A	—	—	—	—
22-pin	(400 mil)	—	—	A	—	—	—		A	A	A	—	—
24-pin	(600 mil)	—	—	—	—	—	—		—	A	—	A	—
28-pin	(600 mil)	—	—	—	—	—	—		—	—	A	—	—
42-pin	(600 mil)	—	—	—	—	—	—		—	A	—	A	A
Dual in Line (S-DIP)													
14-pin	(300 mil)	A	A	—	—	—	—		A	—	—	—	—
18-pin	(300 mil)	A	A	—	A	—	—		—	—	—	—	—
20-pin	(300 mil)	—	—	—	A	—	A		A	—	—	—	—
22-pin	(300 mil)	—	A	—	A	—	A		—	—	—	—	—
24-pin	(300 mil)	A	A	—	—	—	—		—	—	—	—	—
24-pin	(400 mil)	—	—	—	—	—	—		A	A	—	—	—
28-pin	(400 mil)	—	A	A	—	—	—		—	—	A	A	—
30-pin	(400 mil)	—	A	A	—	—	—		—	—	A	—	—
42-pin	(600 mil)	—	—	A	—	—	—		—	A	A	—	A
48-pin	(600 mil)	—	—	—	—	A	—		—	—	—	A	A
Small Outline Package (SOP)													
8-pin	(225 mil)	—	—	—	A	—	—		—	—	—	—	—
8-pin	(300 mil)	—	—	—	—	—	A		—	—	—	—	—
14-pin	(225 mil)	—	—	—	A	—	—		—	—	—	—	—
16-pin	(225 mil)	—	—	—	A	—	—		—	—	—	—	—
16-pin	(300 mil)	A	—	—	—	—	A		A	—	—	—	—
16-pin	(375 mil)	—	A	—	—	—	—		—	—	—	—	—
20-pin	(300 mil)	A	A	—	A	—	A		A	—	—	—	—
24-pin	(300 mil)	A	A	—	A	—	A		A	A	—	—	—
24-pin	(375 mil)	—	—	A	—	—	—		—	—	A	—	—
28-pin	(375 mil)	A	A	A	—	—	—		—	A	A	—	—
Small Outline Package (S-SOP)													
14-pin	(225 mil)	—	—	—	A	—	A		—	—	—	—	—
16-pin	(225 mil)	—	—	—	A	—	A		—	—	—	—	—
20-pin	(300 mil)	A	—	—	—	—	A		A	E	—	—	—
24-pin	(300 mil)	—	—	—	—	—	—		E	E	—	—	—
36-pin	(300 mil)	A	—	—	—	—	A		A	—	—	—	—
Quad Flat Pack													
48-pin	(7 x 7)	—	A	A	—	—	—		—	A	—	—	—
48-pin	(10 x 14)	—	—	A	—	A	—		A	—	—	A	—
48-pin	(10 x 10)	—	—	A	—	—	—		—	—	A	—	—
64-pin	(14 x 20)	—	—	—	—	—	—		—	—	—	A	—
68-pin	(10 x 14)	—	—	—	—	A	—		—	—	—	—	—
80-pin	(14 x 20)	—	—	—	—	A	—		—	—	—	—	—
80-pin	(14 x 14)	—	—	—	—	—	—		—	—	—	—	A

A = Available; "—" = Unavailable; E = under consideration or evaluation

NOTE: NEC reserves the right to alter the package plan based on the results of qualification.
For current package availability, please contact your local NEC Design Center.

NEC's Analog Master Design System

Analog Master bipolar arrays are fully supported by NEC's network of ASIC Design Centers, listed on the back of this data sheet.

Design flow for CHS, V-CHS, and M-CHS ASIC products is shown in figure 4. Users can enlist Design Center support at any step in the design flow before actual manufacturing. The first step is to create the block diagram of a circuit. Next, each block at the element level is designed. A package then must be selected at this stage.

Other considerations in the design are DC, AC transient analysis, analysis of element characteristics for temperature and variation of supply voltage, and dealing with static electric destruction. This is followed by determining the pinouts on the chip and the package selected.

NEC supports its ASIC products with a comprehensive CAD system, described below in Table 8, that significantly reduces the time and expense usually associated with the development of semi-custom analog devices. The system supports schematic entry, simulation, and advanced place-and-route algorithms. These advanced CAD tools ensure accurate designs.

Sample design kits are available at no charge to qualified users: contact an NEC ASIC Design Center for more information. (Software licensing required—NEC reserves the right to prioritize support based on user requirements.)

Figure 4. Analog Workbench Design Flow

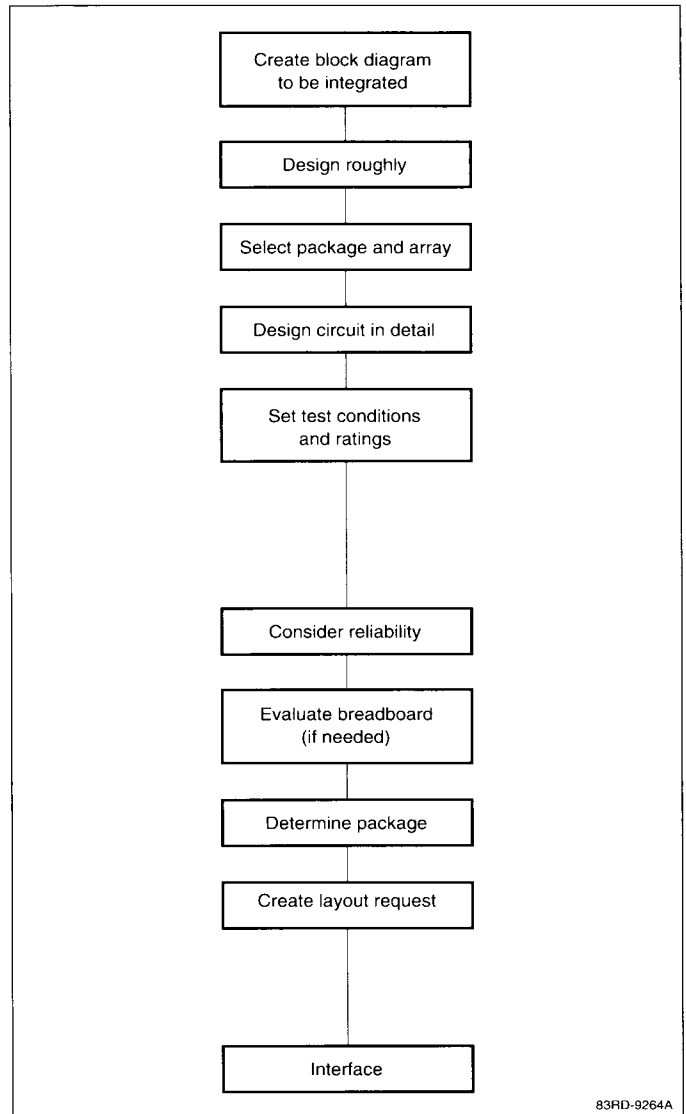


Table 8 Analog Master Design Tools

		Vendor	Cadence	Zuken	Viewlogic	Micro Sim.	OrCAD	Mentor	Media		
Hardware		Software	AWBllc	CR-3000/ AWS*	Workview	PSPICE	OrCAD/* SDT III	IDEA Station (MSPICE)	1/4 in. Cartridge	3.5 in. FD	5 in. FD
NEC	EWS4800		—	√	—	—	—	—	—	√	—
	PC9801		—	—	√	√	—	—	—	√	—
SUN	SUN3/SUN4		√	—	—	—	—	—	√	√	—
Microsystems	SPARC		√	√	—	—	—	—	√	√	—
IBM	PC/XT or /AT		—	—	√	—	—	—	—	√	√
HP	HP9000 300/400		√	√	—	—	—	—	√	—	—
	DN3000/4000		—	—	—	—	—	√	√	—	√
	HP-Apollo-400		—	—	—	—	—	√	√	—	—

*This is to be used with the software entitled Analog Master Developing Support Software.

Block Library List

The Analog Master families offer a variety of analog macros, such as operational amplifiers, comparators, voltage regulators and switches to build analog functions.

Macro Library (CHS)

Block List

Macro Name	Description
------------	-------------

Operational Amplifiers

OA01A	General Purpose operational amplifier
OA02	Single supply operational amplifier
OA03A	Micro-power operational amplifier
OA04A	High impedance input Op Amp
OA05	High speed, wide bandwidth, Op Amp
OA06A/-06B	Single supply operational amplifier
OA07A/-07B	High speed operational amplifier

Comparators

CP01	Single supply comparator
CP02	High speed comparator

Regulators

RG01A	Voltage regulator (1.3 - 9V)
RG02A	Voltage regulator (2.5 - 9.5V)

Switches

SW01A	Bi-directional switch (Active- high)
SW01B	Bi-directional switch (Active-low)

ECL

EL01	ECL OR
EL02	ECL NOR

Filters

FL01 – 04	Audio filter (400 Hz f_c 200 kHz)
FL05 – 08	Video filter (200 kHz f_c 5 MHz)

Macro Library (M-CHS)

Block List

Macro Name	Description
------------	-------------

Operational Amplifiers

OA201	General Purpose operational amplifier
OA202	Single supply operational amplifier
OA203	Micro-power operational amplifier
OA206	Low noise operational amplifier

Comparators

CP201	Single supply comparator
CP202	High speed comparator

Regulators

RG201	Voltage regulator (1.3 - 36V)
RG202	High accuracy voltage regulator (5V $\pm$ 2.5%)

Switches

SW201A	Bi-directional switch (H-active)
SW201B	Bi-directional switch (L-active)

Trademark Notes:

Analog Master, EWS4800 series, and PC-98 series are trademarks of NEC Corporation.
 SUN series is a trademark of Sun Microsystems Corporation.
 SPARC Station is a trademark of SPARC International Inc.
 HP9000 is a trademark of Hewlett Packard Company.
 PC/XT, PC/AT is a trademark of International Business Machines Corporation.
 DN series is a trademark of Hewlett Packard Company.
 CR-3000/AWS is a trademark of Zuken Incorporated.
 Workview is a trademark of Viewlogic Systems Corporation.
 PSPICE is a trademark of Microsim Corporation.
 OrCAD is a trademark of OrCAD International Corporation.
 IDEA Station, MSPICE is a trademark of Mentor Graphics Corporation.

ANALOG MASTER

NEC ASIC DESIGN CENTERS

WEST

- 401 Ellis Street
P.O. Box 7241
Mountain View, CA 94039
TEL 415-965-6533
FAX 415-965-6788
- One Embassy Centre
9020 S.W. Washington Square Road,
Suite 400
Tigard, OR 97223
TEL 503-671-0177
FAX 503-643-5911
- 200 E. Sandpointe, Bldg. 8, Suite 150
Santa Ana, CA 92707
TEL 714-546-0501
FAX 714-432-8793

SOUTH CENTRAL/SOUTHEAST

- 16475 Dallas Parkway, Suite 380
Dallas, TX 75248
TEL 214-250-4522
FAX 214-931-8680
- Research Triangle Park
2000 Regency Parkway, Suite 455
Cary, NC 27511
TEL 919-460-1890
FAX 919-469-5926

NORTH CENTRAL/NORTHEAST

- One Natick Executive Park
Natick, MA 01760
TEL 508-655-8833
FAX 508-653-2915
- Greenspoint Tower
2800 W. Higgins Road, Suite 765
Hoffman Estates, IL 60195
TEL 708-519-3945
FAX 708-882-7564

THIRD-PARTY DESIGN CENTERS

SOUTH CENTRAL/SOUTHEAST

- Koos Technical Services, Inc.
385 Commerce Way, Suite 101
Longwood, FL 32750
TEL 407-260-8727
FAX 407-260-6227
- Integrated Silicon Systems Inc.
2222 Chapel Hill Nelson Highway
Durham, NC 27713
TEL 919-361-5814
FAX 919-361-2019

NEC

NEC Electronics Inc.

CORPORATE HEADQUARTERS

475 Ellis Street
P.O. Box 7241
Mountain View, CA 94039
TEL 415-960-6000

For literature, call toll-free 7 a.m. to 6 p.m. Pacific time:

1-800-366-9782

or FAX your request to: **1-800-729-9288**

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Electronics (NECEL). The information in this document is subject to change without notice. Devices sold by NECEL are covered by the warranty and patent indemnification provisions appearing in NECEL Terms and Conditions of Sale only. NECEL makes no warranty, express, statutory, implied, or by description, regarding the information set forth herein or regarding the freedom of the described devices from patent infringement. NECEL makes no warranty of merchantability or fitness for any purpose. NECEL assumes no responsibility for any errors that may appear in this document. NECEL makes no commitment to update or to keep current information contained in this document. The devices listed in this document are not suitable for use in aircraft, aerospace equipment, submarine cables, nuclear reactor control systems and life support systems. If customers intend to use NEC devices for above applications or they intend to use "standard" quality grade NEC devices for applications not intended by NEC, please contact our sales people in advance.

036791 