

NPN 8 GHz wideband transistor

BFG67; BFG67/X; BFG67R; BFG67/XR

FEATURES

- High power gain
- Low noise figure
- High transition frequency
- Gold metallization ensures excellent reliability.



DESCRIPTION

The BFG67 is a silicon npn transistor in a 4-pin, dual-emitter plastic SOT143 envelope. It is available as in-line emitter pinning (BFG67) and cross emitter pinning (BFG67/X). Versions with reverse pinning (BFG67R and BFG67/XR) are available upon request.

This transistor is designed for wideband applications in the GHz range, such as satellite TV tuners and portable RF communications equipment.

PINNING

PIN	DESCRIPTION
BFG67 (Fig.1) Code: V3.	
1	collector
2	base
3	emitter
4	emitter
BFG67/X (Fig.1) Code: V12	
1	collector
2	emitter
3	base
4	emitter
BFG67R (Fig.2) Code: V27	
1	collector
2	base
3	emitter
4	emitter
BFG67/XR (Fig.2) Code: V26	
1	collector
2	emitter
3	base
4	emitter

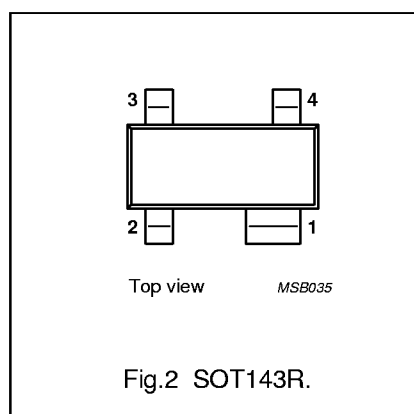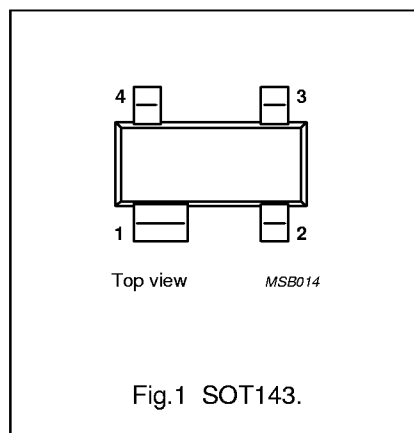

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_{CE0}	collector-emitter voltage	open base	—	—	10	V
I_C	DC collector current		—	—	50	mA
P_{tot}	total power dissipation	up to $T_s = 65\text{ °C}$ (note 1)	—	—	300	mW
C_{re}	feedback capacitance	$I_C = i_c = 0$; $V_{CB} = 8\text{ V}$; $f = 1\text{ MHz}$	—	0.5	—	pF
f_T	transition frequency	$I_C = 15\text{ mA}$; $V_{CE} = 8\text{ V}$; $f = 500\text{ MHz}$	—	8	—	GHz
G_{UM}	maximum unilateral power gain	$I_C = 15\text{ mA}$; $V_{CE} = 8\text{ V}$; $T_{amb} = 25\text{ °C}$; $f = 1\text{ GHz}$	—	17	—	dB
F	noise figure	$\Gamma_s = \Gamma_{opt}$; $I_C = 5\text{ mA}$; $V_{CE} = 8\text{ V}$; $T_{amb} = 25\text{ °C}$; $f = 1\text{ GHz}$	—	1.3	—	dB
		$\Gamma_s = \Gamma_{opt}$; $I_C = 5\text{ mA}$; $V_{CE} = 8\text{ V}$; $T_{amb} = 25\text{ °C}$; $f = 2\text{ GHz}$	—	2.2	—	dB

Note

1. T_s is the temperature at the soldering point of the collector tab.

NPN 8 GHz wideband transistor

BFG67; BFG67/X;
BFG67R; BFG67/XR**LIMITING VALUES**

In accordance with the Absolute Maximum System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	20	V
V_{CEO}	collector-emitter voltage	open base	–	10	V
V_{EBO}	emitter-base voltage	open collector	–	2.5	V
I_C	DC collector current		–	50	mA
P_{tot}	total power dissipation	up to $T_s = 65\text{ °C}$ (note 1)	–	380	mW
T_{stg}	storage temperature range		–65	150	°C
T_j	junction temperature		–	175	°C

THERMAL RESISTANCE

SYMBOL	PARAMETER	THERMAL RESISTANCE
$R_{th\ j-s}$	from junction to soldering point (note 1)	290 K/W

Note

1. T_s is the temperature at the soldering point of the collector tab.

NPN 8 GHz wideband transistor

BFG67; BFG67/X;
BFG67R; BFG67/XR

CHARACTERISTICS

 $T_j = 25\text{ °C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{CBO}	collector cut-off current	open emitter; $I_E = 0$; $V_{CB} = 5\text{ V}$	—	—	50	nA
h_{FE}	DC current gain	$I_C = 15\text{ mA}$; $V_{CE} = 5\text{ V}$	60	100	—	
f_T	transition frequency	$I_C = 15\text{ mA}$; $V_{CE} = 8\text{ V}$; $f = 500\text{ MHz}$	—	8	—	GHz
C_c	collector capacitance	$I_E = I_E = 0$; $V_{CB} = 8\text{ V}$; $f = 1\text{ MHz}$	—	0.7	—	pF
C_e	emitter capacitance	$I_C = I_C = 0$; $V_{EB} = 0.5\text{ V}$; $f = 1\text{ MHz}$	—	1.3	—	pF
C_{re}	feedback capacitance	$I_C = I_C = 0$; $V_{CB} = 8\text{ V}$; $f = 1\text{ MHz}$	—	0.5	—	pF
G_{UM}	maximum unilateral power gain (note 1)	$I_C = 15\text{ mA}$; $V_{CE} = 8\text{ V}$; $T_{amb} = 25\text{ °C}$; $f = 1\text{ GHz}$	—	17	—	dB
		$I_C = 15\text{ mA}$; $V_{CE} = 8\text{ V}$; $T_{amb} = 25\text{ °C}$; $f = 2\text{ GHz}$	—	10	—	dB
F	noise figure	$\Gamma_s = \Gamma_{opt}$; $I_C = 5\text{ mA}$; $V_{CE} = 8\text{ V}$; $T_{amb} = 25\text{ °C}$; $f = 1\text{ GHz}$	—	1.3	—	dB
		$\Gamma_s = \Gamma_{opt}$; $I_C = 15\text{ mA}$; $V_{CE} = 8\text{ V}$; $T_{amb} = 25\text{ °C}$; $f = 1\text{ GHz}$	—	1.7	—	dB
		$I_C = 5\text{ mA}$; $V_{CE} = 8\text{ V}$; $T_{amb} = 25\text{ °C}$; $f = 2\text{ GHz}$; $Z_S = 60\text{ }\Omega$	—	2.5	—	dB
		$I_C = 15\text{ mA}$; $V_{CE} = 8\text{ V}$; $T_{amb} = 25\text{ °C}$; $f = 2\text{ GHz}$; $Z_S = 60\text{ }\Omega$	—	3	—	dB

Note

1. G_{UM} is the maximum unilateral power gain, assuming S_{12} is zero and $G_{UM} = 10 \log \frac{|s_{21}|^2}{(1 - |s_{11}|^2)(1 - |s_{22}|^2)} \text{ dB}$.

NPN 8 GHz wideband transistor

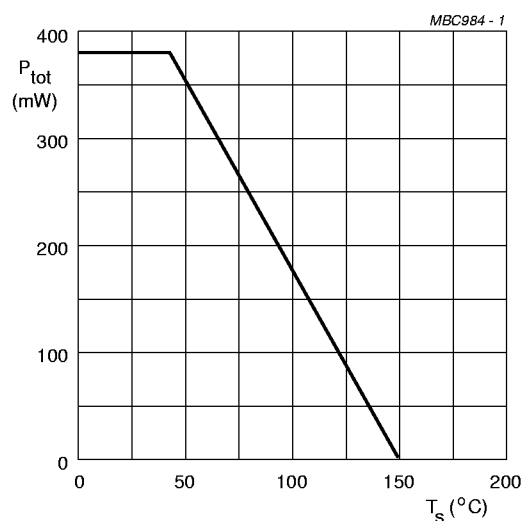
BFG67; BFG67/X;
BFG67R; BFG67/XR

Fig.3 Power derating curve.

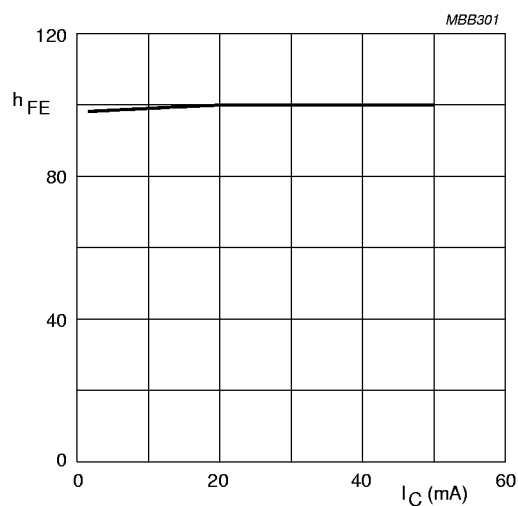
 $V_{CE} = 5$ V.

Fig.4 DC current gain as a function of collector current.

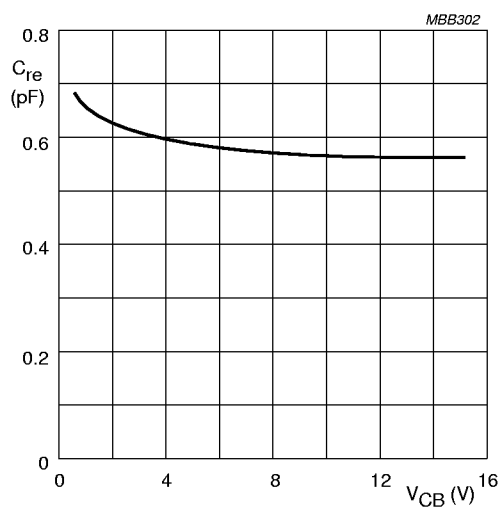
 $I_C = I_b = 0$; $f = 1$ MHz.

Fig.5 Feedback capacitance as a function of collector-base voltage.






 $V_{CE} = 8$ V; $T_{amb} = 25$ °C; $f = 2$ GHz.

Fig.6 Transition frequency as a function of collector current.

NPN 8 GHz wideband transistor



BFG67; BFG67/X;
BFG67R; BFG67/XR

In Figs 7 to 10, G_{UM} = maximum unilateral power gain; MSG = maximum stable gain; G_{max} = maximum available gain.

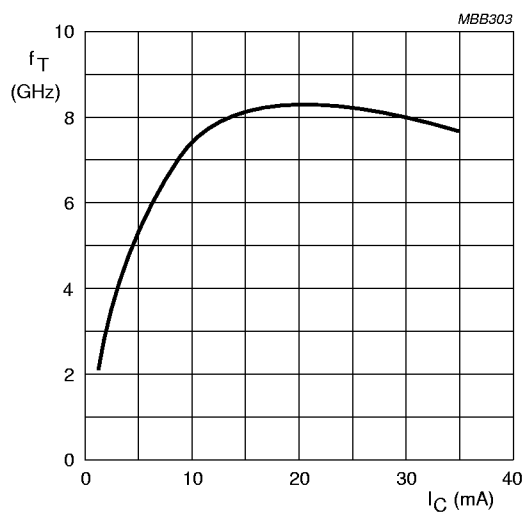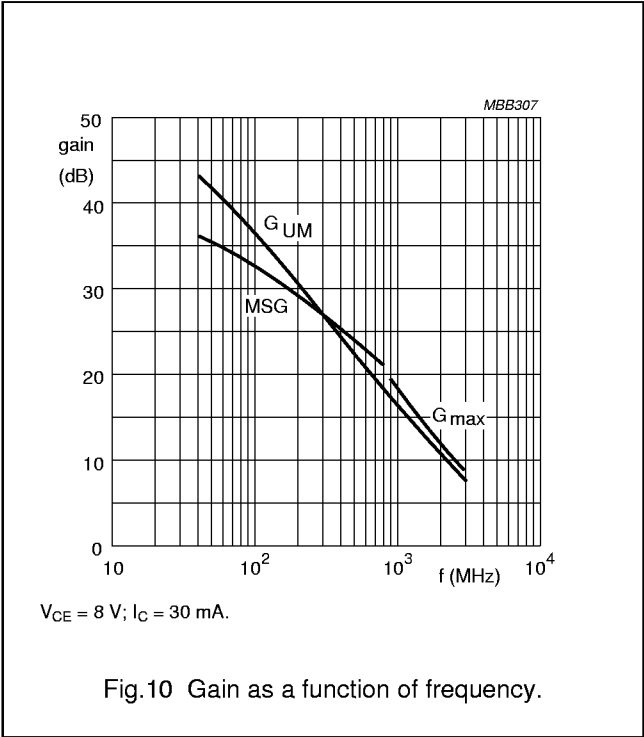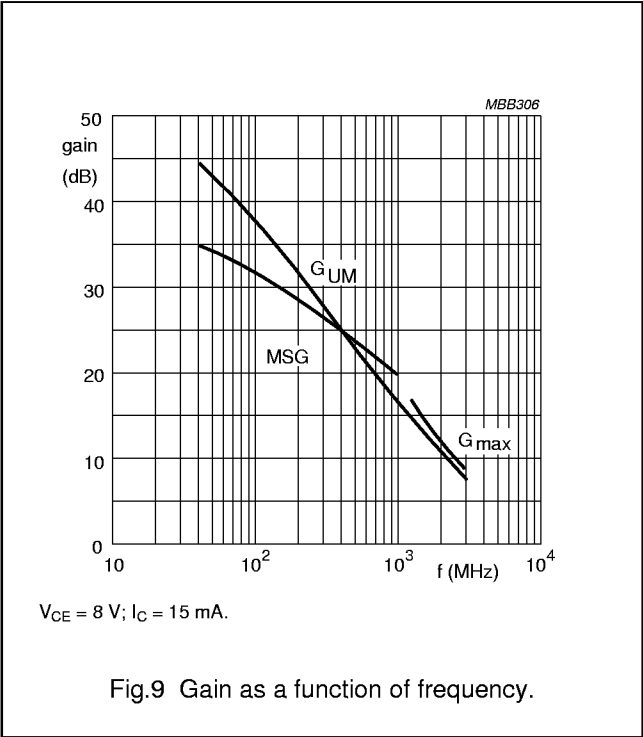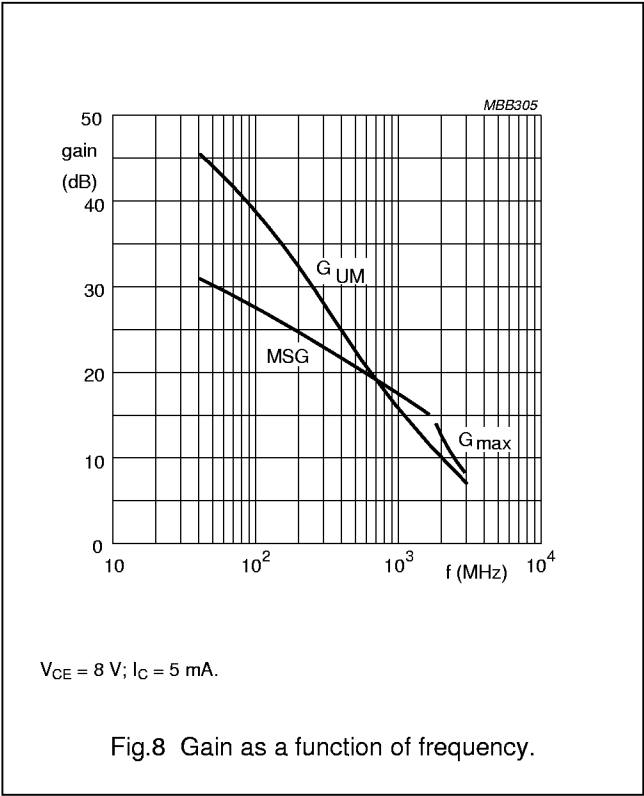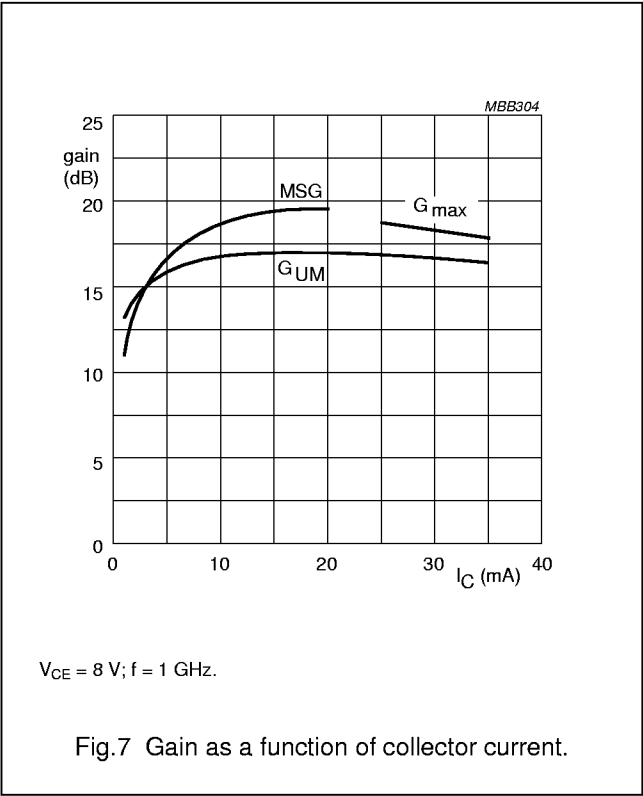

NPN 8 GHz wideband transistor

BFG67; BFG67/X;
BFG67R; BFG67/XR

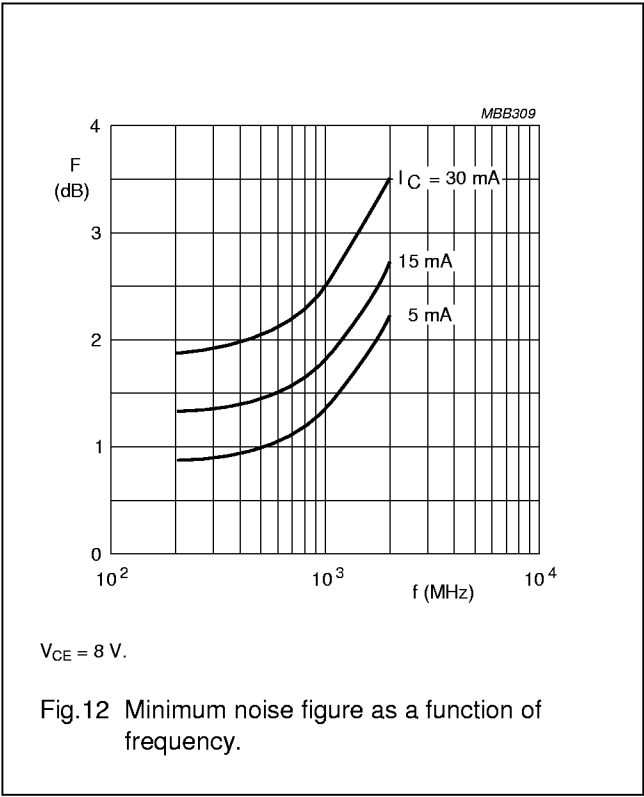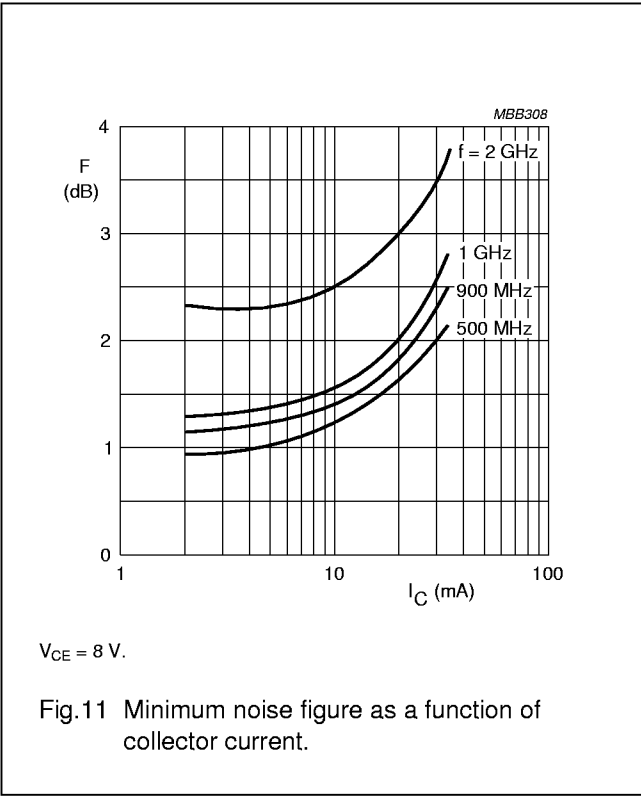


BFG67/X

f (MHz)	V_{CE} (V)	I_C (mA)
500	8	5

Noise Parameters

F_{min} (dB)	Gamma (opt)		$R_n/50$
	(mag)	(ang)	
0.95	0.455	33.8	0.288

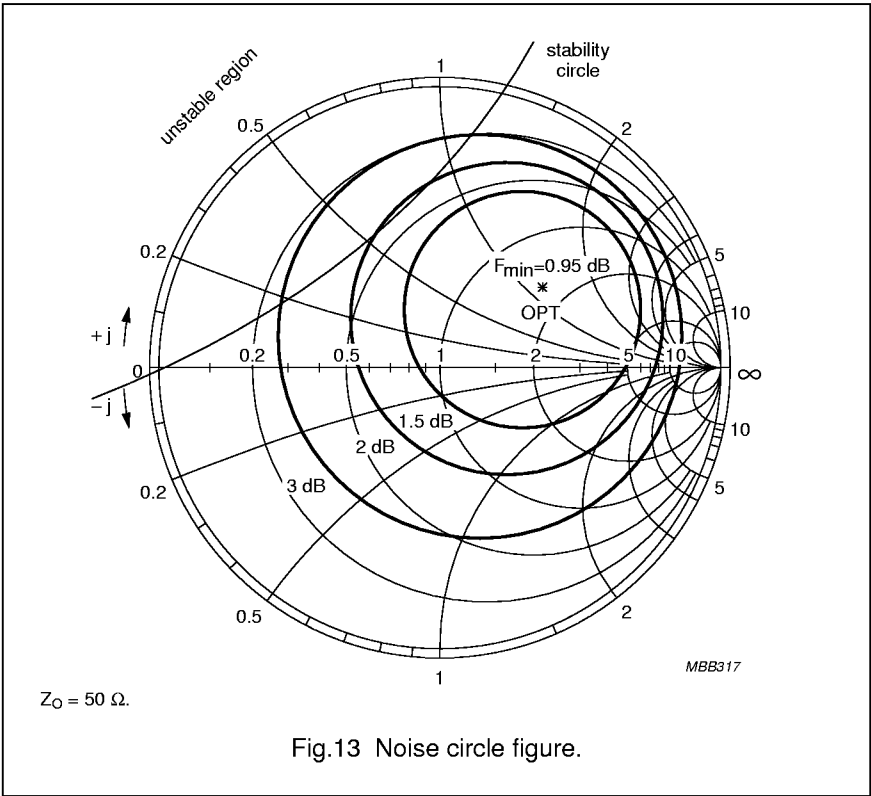

NPN 8 GHz wideband transistor


BFG67; BFG67/X;
BFG67R; BFG67/XR

BFG67/X

f (MHz)	V _{CE} (V)	I _C (mA)
1000	8	5

Noise Parameters

F _{min} (dB)	Gamma (opt)		R _n /50
	(mag)	(ang)	
1.3	0.375	65.9	0.304

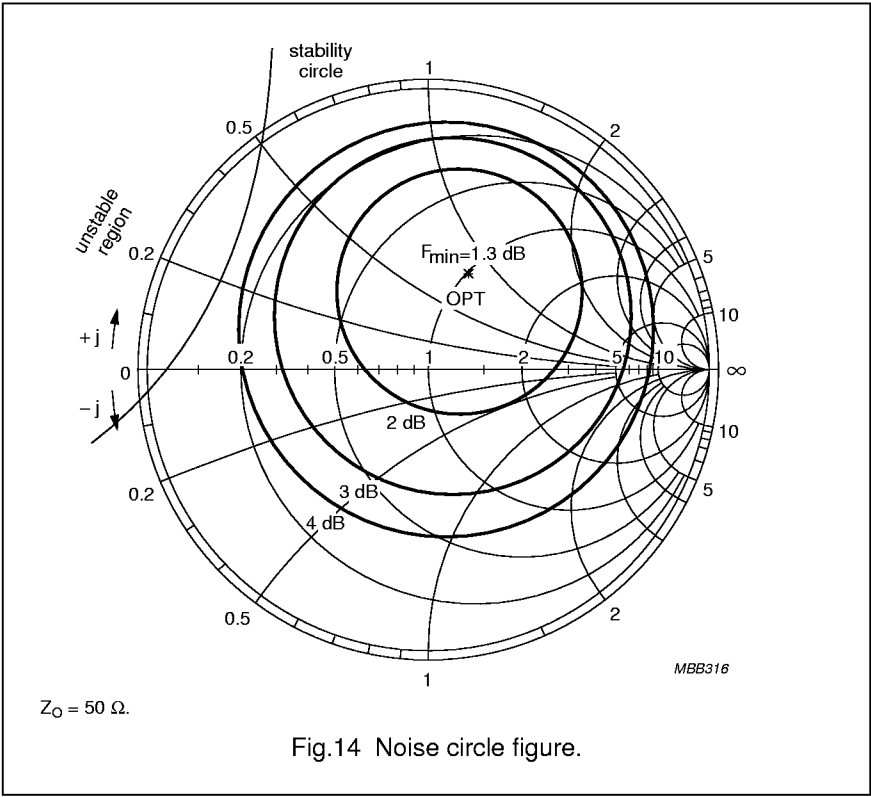

BFG67/X


f (MHz)	V _{CE} (V)	I _C (mA)
2000	8	5

Noise Parameters



F _{min} (dB)	Gamma (opt)		R _n /50
	(mag)	(ang)	
2.2	0.391	136.5	0.184

Average Gain Parameters



G _{MAX} (dB)	Gamma (max)	
	(mag)	(ang)
12	0.839	-170

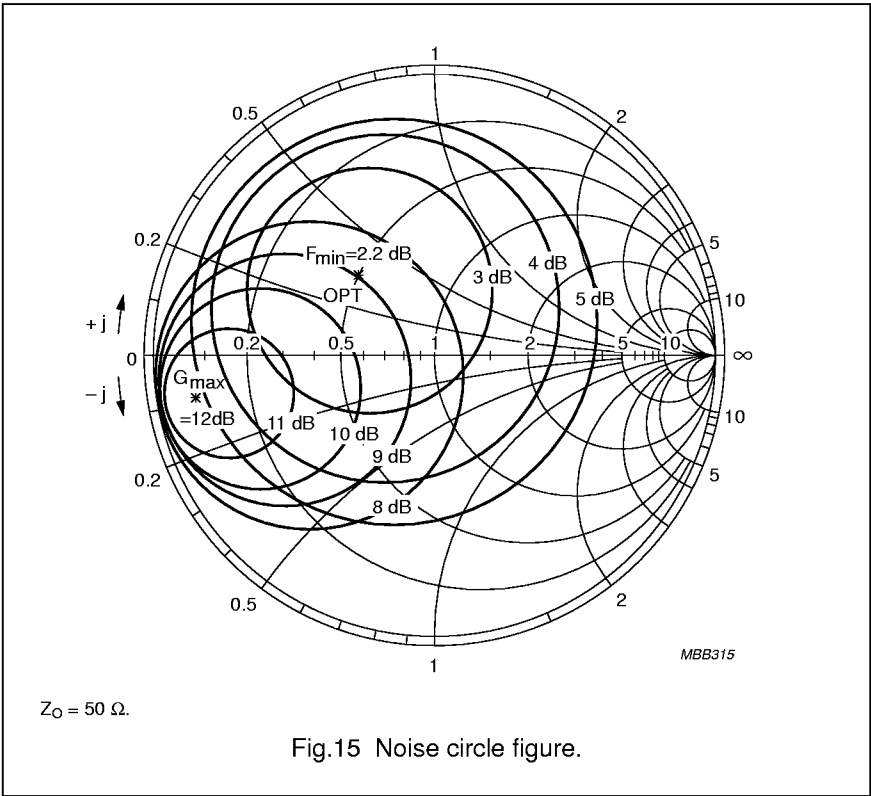

NPN 8 GHz wideband transistor

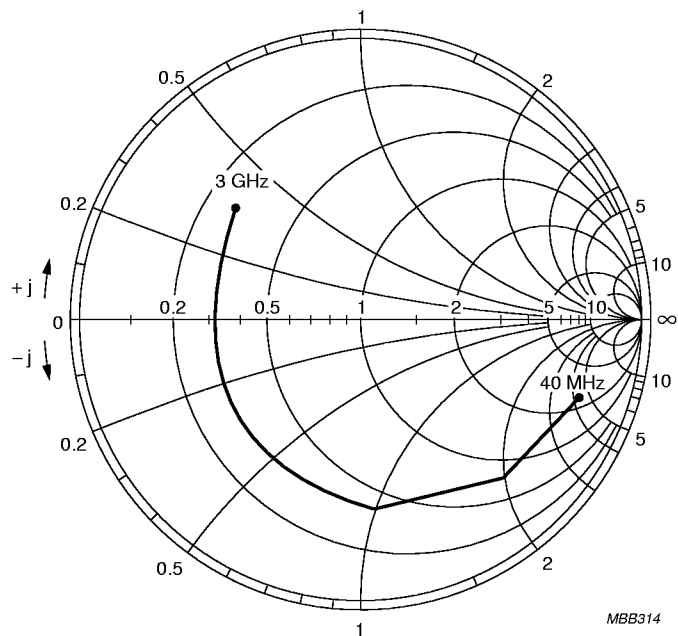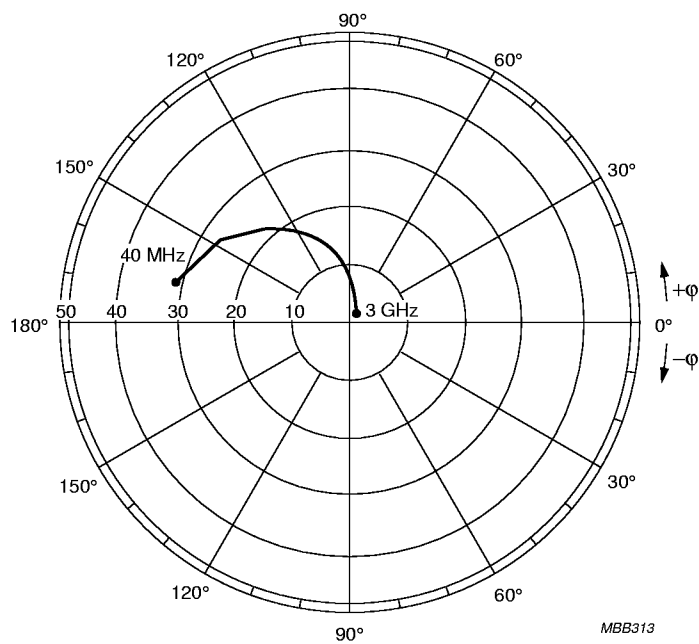BFG67; BFG67/X;
BFG67R; BFG67/XR $V_{CE} = 8\text{ V}; I_C = 15\text{ mA}; Z_O = 50\ \Omega.$ Fig.16 Common emitter input reflection coefficient (S_{11}). $V_{CE} = 8\text{ V}; I_C = 15\text{ mA}; Z_O = 50\ \Omega.$ Fig.17 Common emitter forward transmission coefficient (S_{21}).

NPN 8 GHz wideband transistor

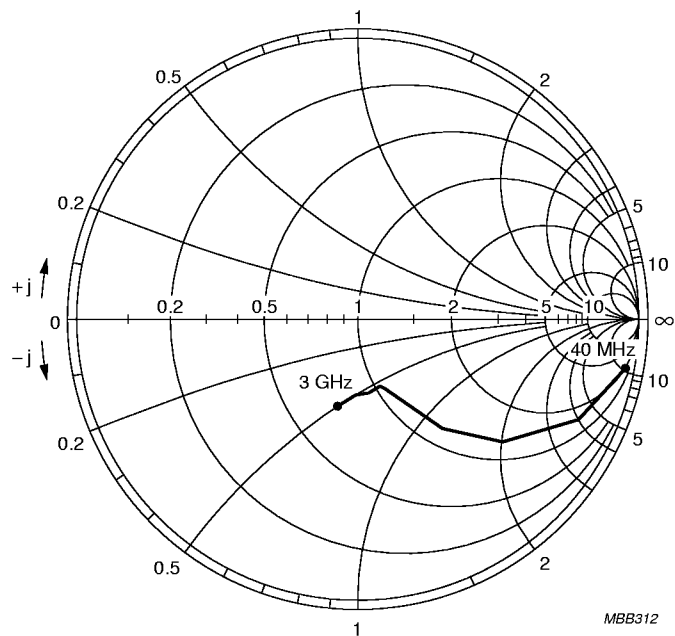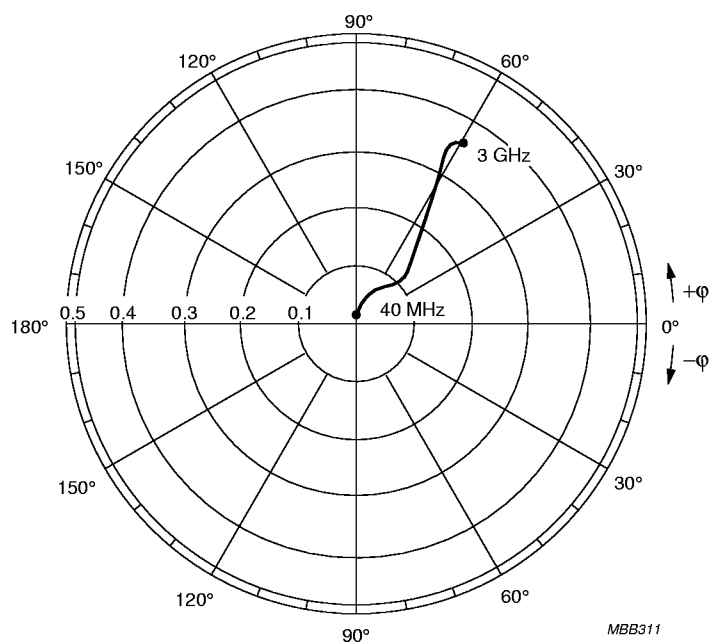BFG67; BFG67/X;
BFG67R; BFG67/XR $V_{CE} = 8\text{ V}; I_C = 15\text{ mA}.$ Fig.18 Common emitter reverse transmission coefficient (S_{12}). $V_{CE} = 8\text{ V}; I_C = 15\text{ mA}.$ Fig.19 Common emitter output reflection coefficient (S_{22}).


NPN 8 GHz wideband transistor

BFG67; BFG67/X;
BFG67R; BFG67/XR

PACKAGE OUTLINES

Plastic surface mounted package; 4 leads

SOT143B

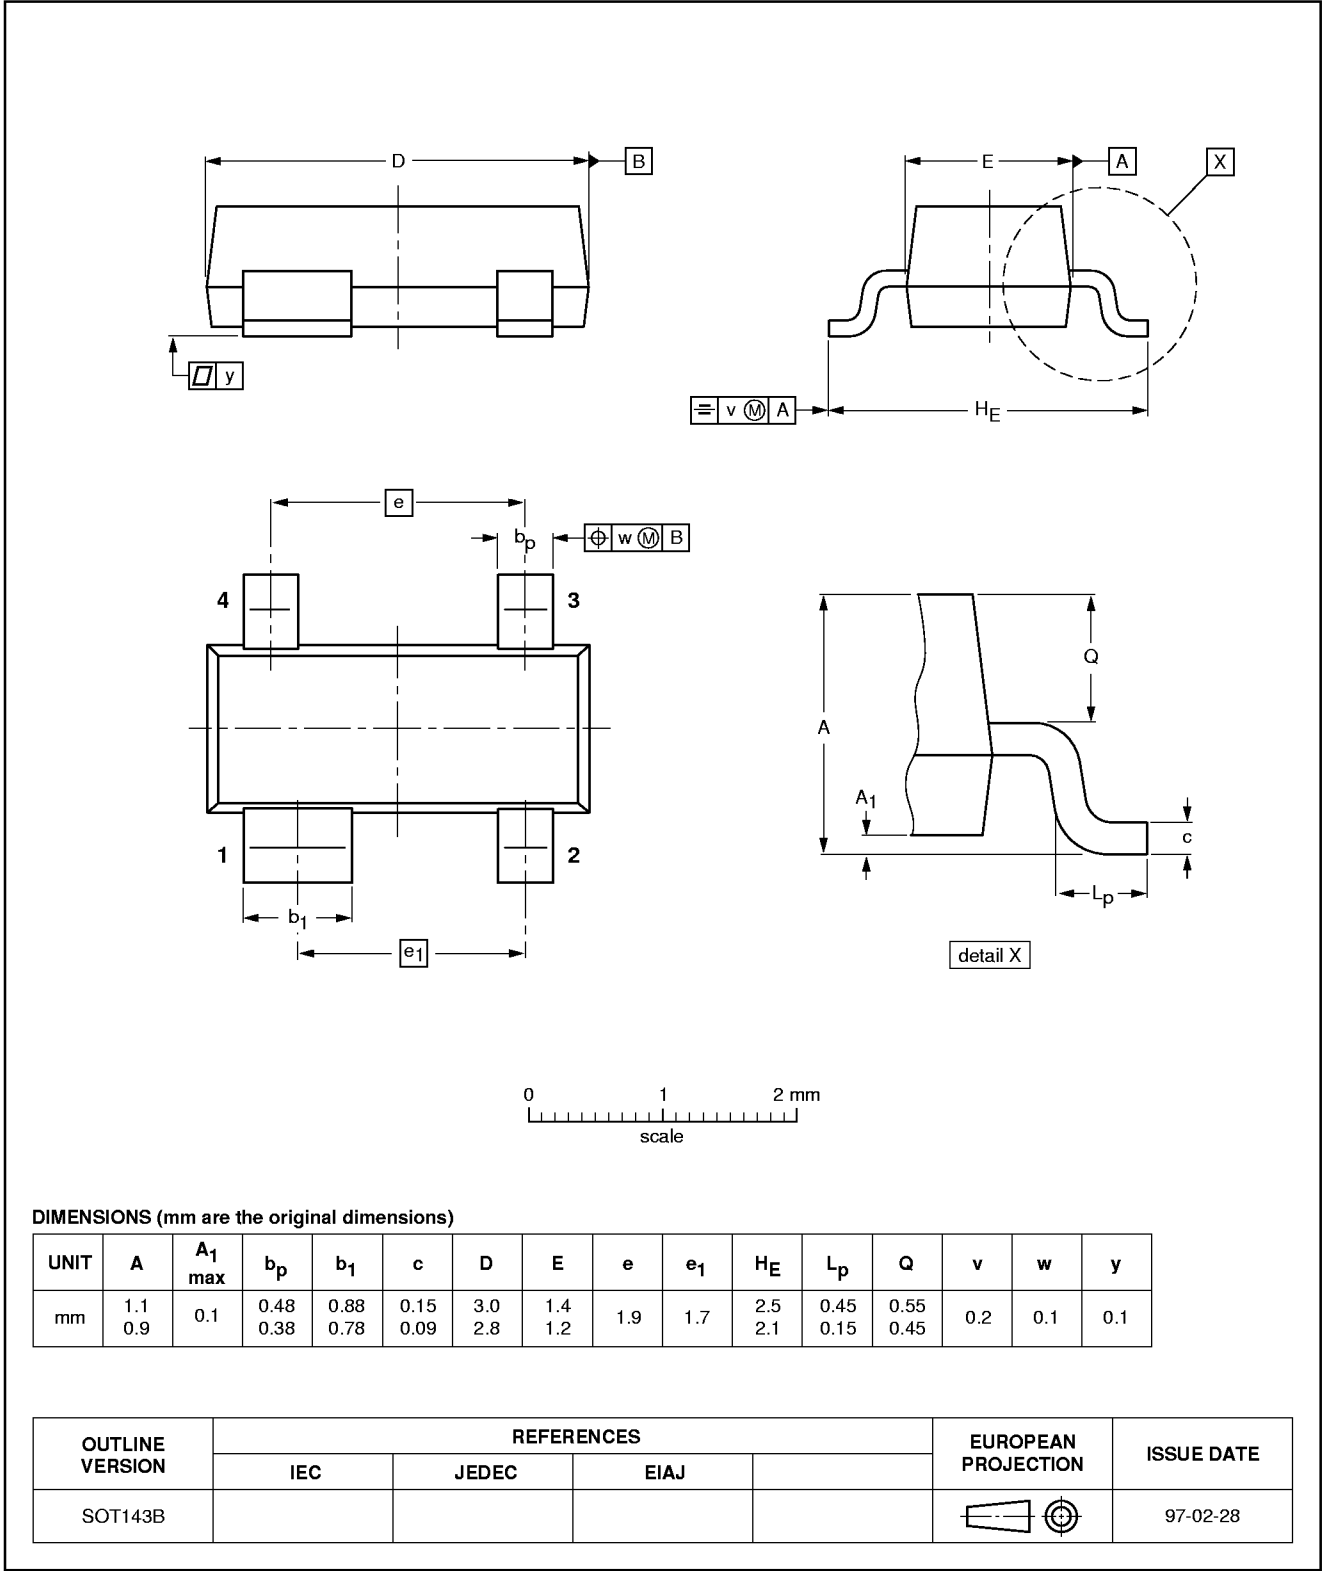

NPN 8 GHz wideband transistor

BFG67; BFG67/X;
BFG67R; BFG67/XR

Plastic surface mounted package; reverse pinning; 4 leads

SOT143R

