

TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC


TA8851CN

AUDIO / VIDEO SWITCH IC FOR TV WITH S-TERMINALS

The TA8851CN is an A/V SWITCH IC, which has 7 input channels and 2 output channels. Because the 2 output channels can be switched independently of each other, the TA8851CN allows you to configure a PIP system input switching circuit easily.

The TA8851CN can be interfaced easily to a microcontroller via the I²C bus.

3 of 7 input channels can be used for Y/C separated input.

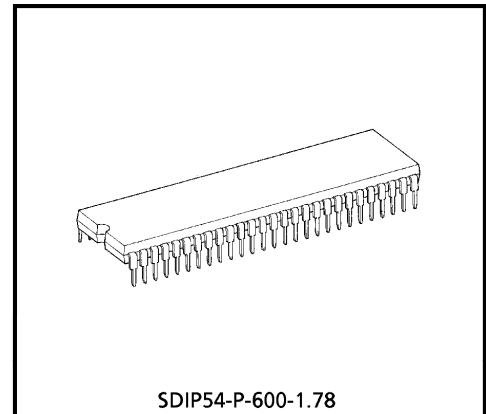

Weight : 1.0g (Typ.)

FEATURES

Video Stage

- Input
 - Composite video input : 7 channels
 - Y/C input : 3 channels
- Output
 - Composite video output : 2 channels (Main and Sub)
 - Y/C output : 2 channels (Main and Sub)

Audio Stage

- Input
 - L/R input : 7 channels
- Output
 - L/R output : 3 channels (2 of 3 depend on video, and the other is selectable from Main or Sub)


Functions

- I²C bus interface
- External mute circuit
- DAC output (3 outputs)
- Video clamp circuit
- Mode output
- ADC input (4 inputs)

961001EBA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.


BLOCK DIAGRAM

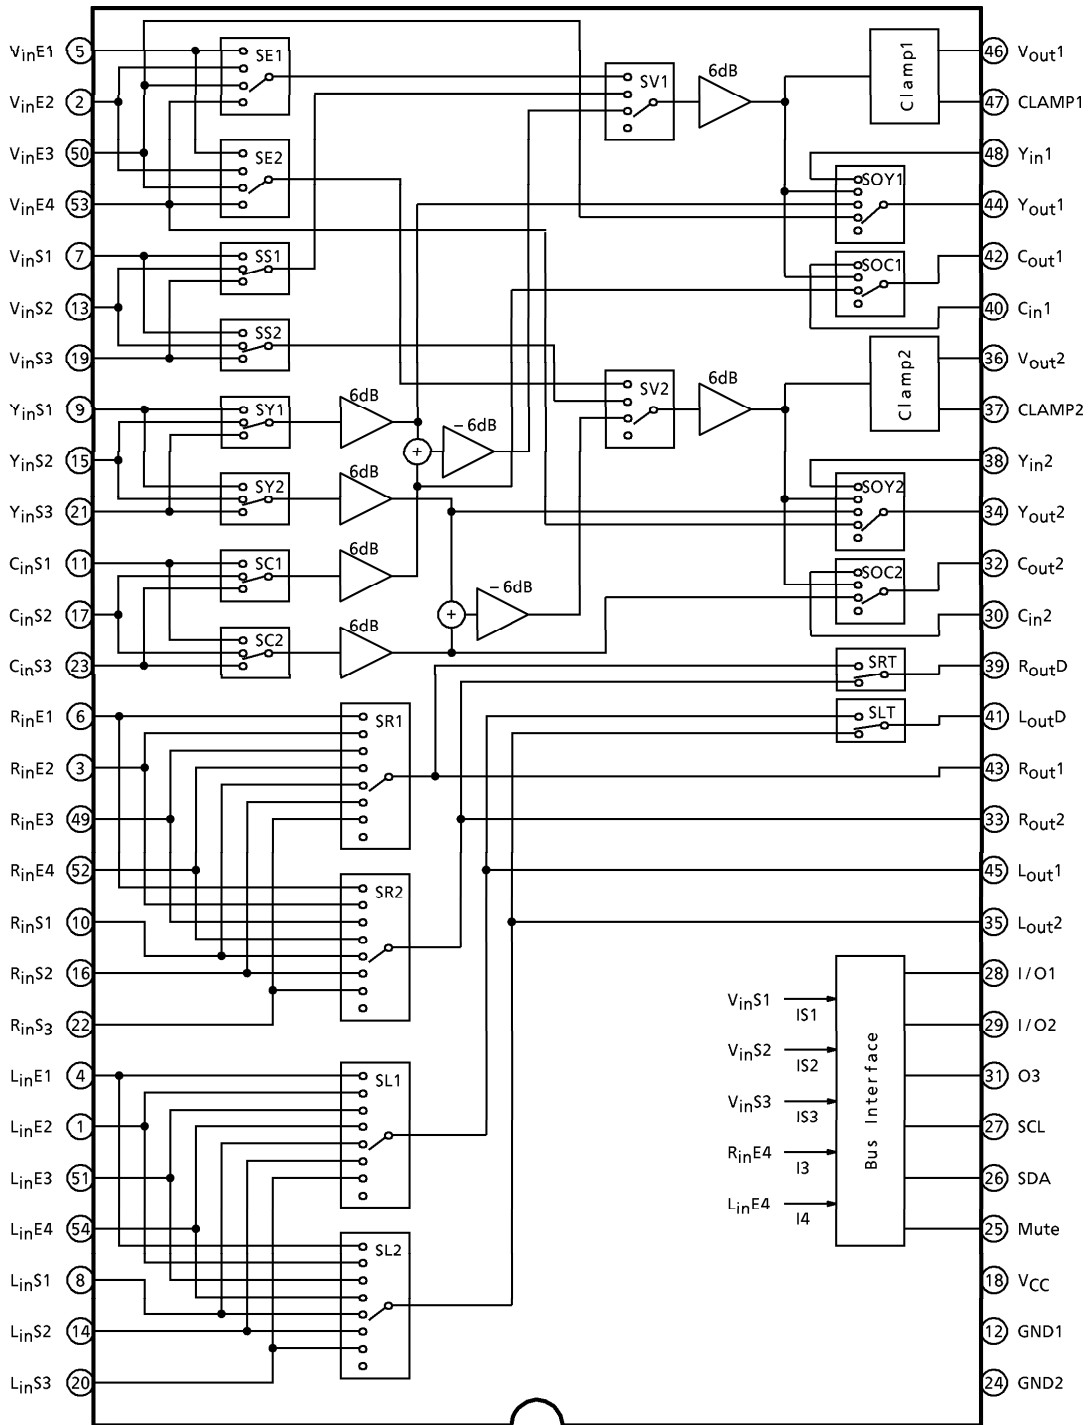

961001EBA2'

- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

TERMINAL CONNECTION DIAGRAM





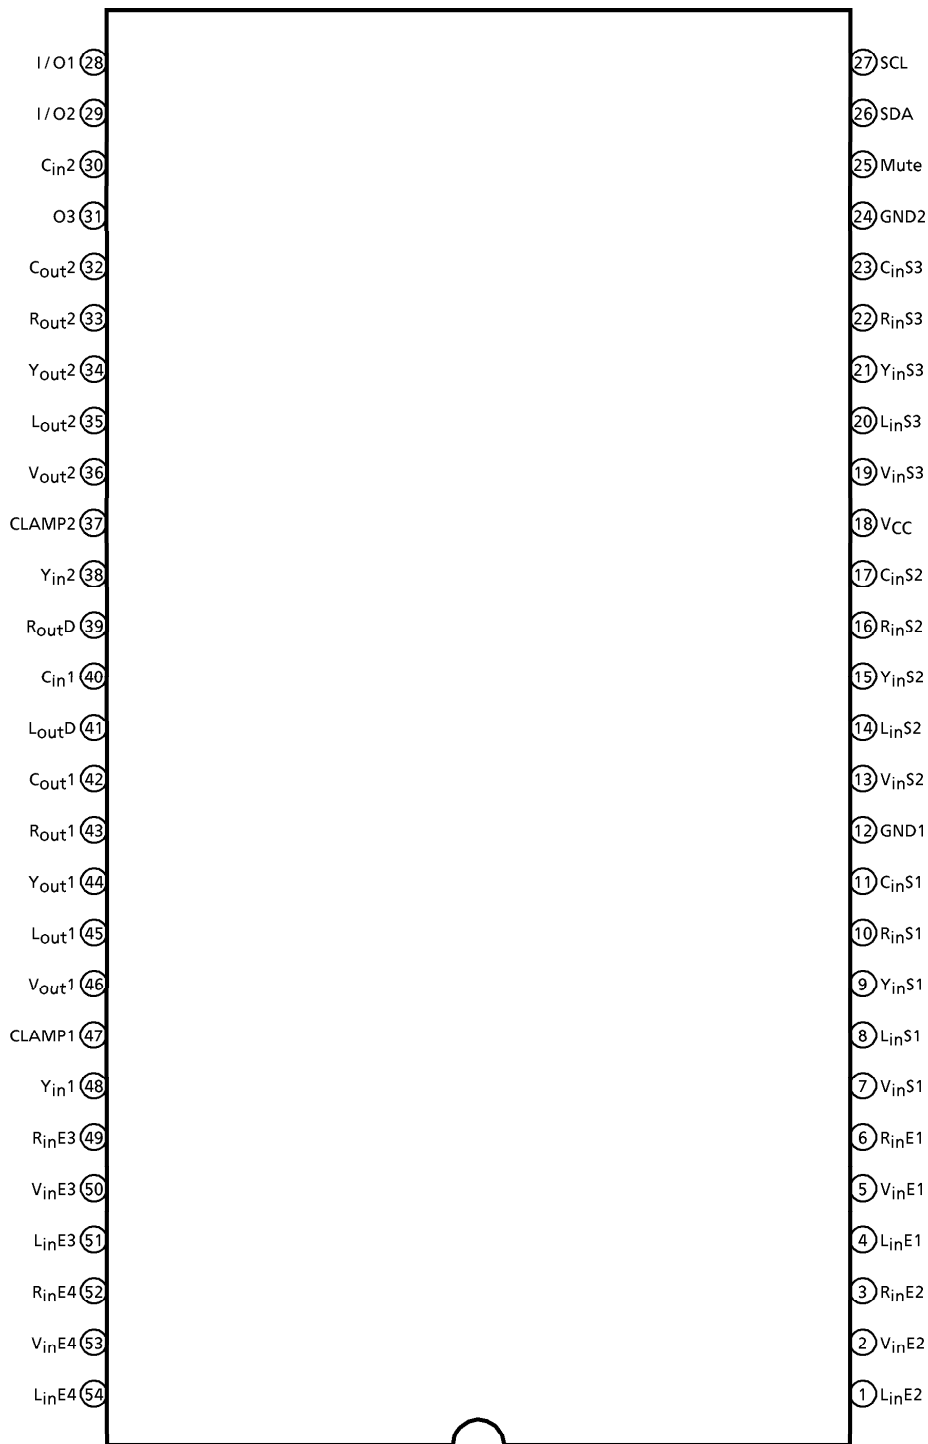


TERMINAL FUNCTION

| PIN No. | PIN NAME | FUNCTION | INTERFACE CIRCUIT |
|--|--|--|-------------------|
| 2 : V_{inE2} 5 : V_{inE1} | Composite Video Signal Input | These pins are for composite video signal input. The recommendable input level is 1.0V _{p-p} . | |
| 50 : V_{inE3} 53 : V_{inE4} | Composite Video Signal/Y Signal Input | These pins can be used for composite video signal or Y signal input. The recommendable input level is 1.0V _{p-p} . | |
| 7 : V_{inS1} 13 : V_{inS2} 19 : V_{inS3} | Composite Video Signal Input and S-Mode Switch | These pins are for composite video signal input and S mode Switch. By setting DC voltage of one of these pins lower than 2.6V, that channel (S1, S2 or S3) turns to S-mode. And when it is higher than 2.6V, that pin is for composite video input. The recommendable input level is 1.0V _{p-p} . | |

| PIN No. | PIN NAME | FUNCTION | INTERFACE CIRCUIT |
|---|-----------------------------------|--|-------------------|
| 9 : Y _{in} S1 15 : Y _{in} S2 21 : Y _{in} S3 11 : C _{in} S1 17 : C _{in} S2 23 : C _{in} S3 | Y Signal Input/ C Signal Input | These pins accept a Y signal from the S-terminal and a C signal as input. The recommended input signal level is 1.0V _{p-p} for Y signal and 300mV _{p-p} for C signal (burst). | |
| 4 : L _{in} E1 6 : R _{in} E1 | Audio Input (TV) | These pins accept the sound of the internal TV signal as input. The signal input to this pin is output from the main/sub output after being selected, as well as from the TV audio output terminal. The recommended input signal level is 300mV _{rms} . | |
| 52 : R _{in} E4 54 : L _{in} E4 | Audio Input/ ADC Input | These pins accept an audio signal as input. They also accept input from a 1bit ADC. In this case, if the voltage on these pins is below 2.3V the ADC outputs I ₃ and I ₄ become logic is. The recommended input signal level is 300mV _{rms} . | |
| 8 : L _{in} S1 10 : R _{in} S1 14 : L _{in} S2 16 : R _{in} S2 20 : L _{in} S3 22 : R _{in} S3 1 : L _{in} E2 3 : R _{in} E2 51 : L _{in} E3 49 : R _{in} E3 | Audio Input | These pins accept an audio signal as input. The recommended input signal level is 300mV _{rms} . | |

| PIN No. | PIN NAME | FUNCTION | INTERFACE CIRCUIT |
|--|----------------|---|-------------------|
| 25 : Mute | Mute | If the voltage on this pin is above 1.5V, all audio outputs (main, sub, and TV) are disabled. | |
| 46 : V _{out1} 36 : V _{out2} | Monitor Output | These pins output the selected composite signal. The standard output signal amplitude is 2.0V _{p-p} . These pins can sink a maximum current of 3.0mA. | |
| 47 : CLAMP1 37 : CLAMP2 | Clamp Filter | These pins are a filter terminal for the clamp circuit to maintain the monitor output at a constant DC level. If these pins are tied to GND, the clamp circuit is disabled, so that the DC voltage of the monitor output cannot be clamped to a constant level. | |
| 48 : Y _{in1} 40 : C _{in1} 38 : Y _{in2} 30 : C _{in2} | Comb Y/C Input | These pins accept a Y/C separated signal from the comb filter as input. The recommended input signal level is 2.0V _{p-p} for Y signal and 600mV _{p-p} for C signal (burst). | |
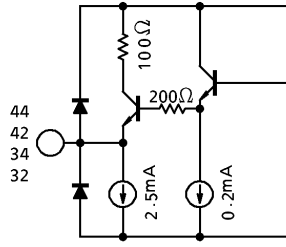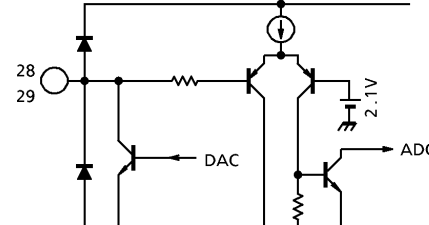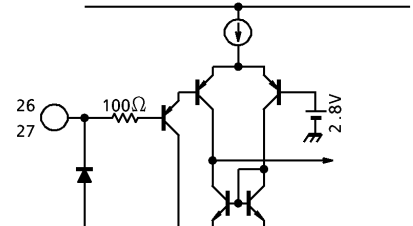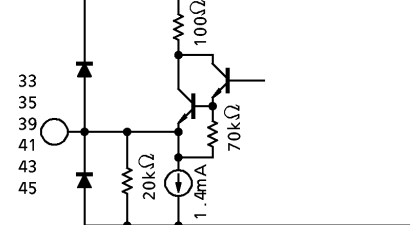
| PIN No. | PIN NAME | FUNCTION | INTERFACE CIRCUIT |
|--|--------------|---|--|
| 44 : Yout1 42 : Cout1 34 : Yout2 32 : Cout2 | Y/C Output | These pins output the Y and C signals that are fed to the V/C/D circuits. The standard output signal level is 2.0V _{p-p} for Y signal and 600mV _{p-p} for C signal (burst). These pins can sink a maximum current of 2.5mA. |  |
| 28 : I/O1 29 : I/O2 | I/O | These pins are for input and output to and from the 1bit DAC/ADC of the bus signal. These pins can source a maximum current of 2.0mA. |  |
| 31 : O3 | O3 | This pin is for output of the 1bit DAC of the bus signal. This pin can source a maximum current of 2.0mA. |  |
| 26 : SDA 27 : SCL | SCL/SDA | These pins are for input of the I ² C bus. |  |
| 33 : Rout2 35 : Lout2 39 : RoutD 41 : LoutD 43 : Rout1 45 : Lout1 | Audio Output | These pins output an audio signal. These pins can sink a maximum current of 1.4mA. |  |

ADDRESS MAP

(Slave address 90H, 91H)

| MODE | DATA No. | DATA | | | | | | | |
|----------------------|---------------|----------------------|-----|------------|------------------|---------------|------------------|------------|-------|
| | | D07 | D06 | D05 | D04 | D03 | D02 | D01 | D00 |
| Write | Data 1 | — | | DAC Output | | | Sound Selection | Sound Mute | |
| | | | | (0) | (1) | (1) | (1) | (1) | (1) |
| | Data 2 (main) | D17 | D16 | D15 | D14 | D13 | D12 | D11 | D10 |
| | | Y/C Output Switching | | | | F.VIDEO | Output Switching | | |
| | | (0) | (0) | (0) | (0) | (0) | (0) | (0) | (0) |
| | Data 3 (sub) | D27 | D26 | D25 | D24 | D23 | D22 | D21 | D20 |
| Y/C Output Switching | | | | F.VIDEO | Output Switching | | | | |
| | (0) | (0) | (0) | (0) | (0) | (0) | (0) | (0) | |
| Read | Data 4 | D37 | D36 | D35 | D34 | D33 | D32 | D31 | D30 |
| | | ADC Ident | | | | S Input Ident | | | P.O.R |
| | | (0) | (0) | (0) | (0) | (0) | (0) | (0) | (1) |

F.VIDEO : Forced video mode
 P.O.R : Power On reset (power : ON (1))
 (0) (1) : preset

© Write mode
Output switching (main)

| MODE | | BUS DATA | | | | S INPUT | | | OUTPUT SIGNAL | | | |
|------|----|-----------------|-----------------|-----------------|-----------------|---------|-----|-----|-------------------|---|-------------------|-------------------|
| | | D ₁₃ | D ₁₂ | D ₁₁ | D ₁₀ | IS1 | IS2 | IS3 | V _{out1} | R _{out1} | L _{out1} | |
| TV | E1 | — | 1 | 1 | 1 | — | — | — | V _{inE1} | R _{inE1} | L _{inE1} | |
| | E2 | — | 1 | 1 | 0 | — | — | — | V _{inE2} | R _{inE2} | L _{inE2} | |
| | E3 | — | 1 | 0 | 1 | — | — | — | V _{inE3} | R _{inE3} | L _{inE3} | |
| | E4 | — | 1 | 0 | 0 | — | — | — | V _{inE4} | R _{inE4} | L _{inE4} | |
| | S1 | V | 0 | 0 | 1 | 1 | 0 | — | — | V _{inS1} | R _{inS1} | L _{inS1} |
| | | S | 1 | | | | — | | | Y _{inS1} + C _{inS1} | | |
| | | | — | | | | 1 | | | | | |
| | S2 | V | 0 | 0 | 1 | 0 | — | 0 | — | V _{inS2} | R _{inS2} | L _{inS2} |
| | | S | 1 | | | | | — | | Y _{inS2} + C _{inS2} | | |
| | | | — | | | | | 1 | | | | |
| | S3 | V | 0 | 0 | 0 | 1 | — | — | 0 | V _{inS3} | R _{inS3} | L _{inS3} |
| | | S | 1 | | | | | | — | Y _{inS3} + C _{inS3} | | |
| | | — | | | | | | 1 | | | | |
| Mute | | — | 0 | 0 | 0 | — | — | — | Mute | Mute | Mute | |

Output switching (sub)

| MODE | | BUS DATA | | | | S INPUT | | | OUTPUT SIGNAL | | | |
|------|----|-----------------|-----------------|-----------------|-----------------|---------|-----|-----|-------------------|---|-------------------|-------------------|
| | | D ₂₃ | D ₂₂ | D ₂₁ | D ₂₀ | IS1 | IS2 | IS3 | V _{out2} | R _{out2} | L _{out2} | |
| TV | E1 | — | 1 | 1 | 1 | — | — | — | V _{inE1} | R _{inE1} | L _{inE1} | |
| | E2 | — | 1 | 1 | 0 | — | — | — | V _{inE2} | R _{inE2} | L _{inE2} | |
| | E3 | — | 1 | 0 | 1 | — | — | — | V _{inE3} | R _{inE3} | L _{inE3} | |
| | E4 | — | 1 | 0 | 0 | — | — | — | V _{inE4} | R _{inE4} | L _{inE4} | |
| | S1 | V | 0 | 0 | 1 | 1 | 0 | — | — | V _{inS1} | R _{inS1} | L _{inS1} |
| | | S | 1 | | | | — | | | Y _{inS1} + C _{inS1} | | |
| | | | — | | | | 1 | | | | | |
| | S2 | V | 0 | 0 | 1 | 0 | — | 0 | — | V _{inS2} | R _{inS2} | L _{inS2} |
| | | S | 1 | | | | | — | | Y _{inS2} + C _{inS2} | | |
| | | | — | | | | | 1 | | | | |
| | S3 | V | 0 | 0 | 0 | 1 | — | — | 0 | V _{inS3} | R _{inS3} | L _{inS3} |
| | | S | 1 | | | | | | — | Y _{inS3} + C _{inS3} | | |
| | | — | | | | | | 1 | | | | |
| Mute | | — | 0 | 0 | 0 | — | — | — | Mute | Mute | Mute | |

Y/C output switching (main)

| MODE | | BUS DATA | | | | OUTPUT SIGNAL | | |
|------|------------------|----------|-----|-----|-----|-------------------|-------------------|---|
| | | D17 | D16 | D15 | D14 | Y _{out1} | C _{out1} | |
| Y | S-terminal Input | EXCEPT | 0 | 0 | 1 | 1 | Y _{inS?} | — |
| | Video Input | | | | 1 | 0 | V _{out1} | |
| | Comb1 | | | | 0 | 1 | Y _{in1} | |
| | Comb2 | | | | 0 | 0 | V _{inE3} | |
| C | S-terminal Input | 1 | 1 | — | — | — | C _{inS?} | |
| | Video Input | 1 | 0 | | | | V _{out1} | |
| | Comb | 0 | 1 | | | | C _{in1} | |
| Mute | | 0 | 0 | — | — | Mute | Mute | |

?: 1~3 (SY1、SC1 で選択)

Y/C output switching (sub)

| MODE | | BUS DATA | | | | OUTPUT SIGNAL | | |
|------|------------------|----------|-----|-----|-----|-------------------|-------------------|---|
| | | D27 | D26 | D25 | D24 | Y _{out2} | C _{out2} | |
| Y | S-terminal Input | EXCEPT | 0 | 0 | 1 | 1 | Y _{inS?} | — |
| | Video Input | | | | 1 | 0 | V _{out2} | |
| | Comb1 | | | | 0 | 1 | Y _{in2} | |
| | Comb2 | | | | 0 | 0 | V _{inE4} | |
| C | S-terminal Input | 1 | 1 | — | — | — | C _{inS?} | |
| | Video Input | 1 | 0 | | | | V _{out2} | |
| | Comb | 0 | 1 | | | | C _{in2} | |
| Mute | | 0 | 0 | — | — | Mute | Mute | |

?: 1~3 (SY2、SC2 で選択)

Mute mode

| MODE | BUS | | PIN 25 | VIDEO OUTPUT | | | | SOUND OUTPUT | | | | |
|---------------|-----------------------|------|------------|--------------|----------------|-------|----------------|----------------|----------------|----------------|------|---|
| | BIT | DATA | | MAIN | | SUB | | MAIN | SUB | Dual | | |
| | | | | Vout1 | Yout1 Cout1 | Vout2 | Yout2 Cout2 | Rout1 Lout1 | Rout2 Lout2 | RoutD LoutD | | |
| Ext Mute | — | — | High level | — | — | — | — | Mute | Mute | Mute | | |
| Bus Line Mute | Sound Mute SW | Main | D00 | 1 | — | — | — | — | Mute | — | — | |
| | | Sub | D01 | 1 | — | — | — | — | — | Mute | — | |
| | Video & Sound Mute SW | Main | D10 | 0 | — | Mute | — | — | Mute | — | — | |
| | | | D11 | 0 | | | | | | | | |
| | | | D12 | 0 | | | | | | | | |
| | | Sub | D20 | 0 | — | — | — | Mute | — | — | Mute | — |
| | | | D21 | 0 | | | | | | | | |
| D22 | 0 | | | | | | | | | | | |
| Y/C | Main | D14 | 0 | — | — | Mute | — | — | — | — | | |
| | Sub | D15 | 0 | | | | | | | | | |
| Y/C | Main | D24 | 0 | — | — | — | — | Mute | — | — | | |
| | Sub | D25 | 0 | | | | | | | | | |

DAC output

| TERMINAL | BUS | | OUTPUT |
|----------|-----|------|-----------|
| | BIT | DATA | |
| I/O1 | D03 | 1 | Open |
| | | 0 | Low level |
| I/O2 | D04 | 1 | Open |
| | | 0 | Low level |
| O3 | D05 | 1 | Open |
| | | 0 | Low level |

Dual Sound Selection

| MODE | BUS | | OUTPUT | |
|------|-----|------|------------|------------|
| | BIT | DATA | RoutD | LoutD |
| MAIN | D02 | 1 | Main Sound | Main Sound |
| SUB | | 0 | Sub Sound | Sub Sound |

© Read mode
S-Output ident


| TERMINAL | INPUT | BUS | |
|----------|-------|-----|------|
| | | BIT | DATA |
| VinS1 | L | D31 | 1 |
| | H | | 0 |
| VinS2 | L | D32 | 1 |
| | H | | 0 |
| VinS3 | L | D33 | 1 |
| | H | | 0 |

ADC ident


| TERMINAL | INPUT | BUS | |
|----------|-------|-----|------|
| | | BIT | DATA |
| I/O1 | L | D34 | 1 |
| | H | | 0 |
| I/O2 | L | D35 | 1 |
| | H | | 0 |
| I3 | L | D36 | 1 |
| | H | | 0 |
| I4 | L | D37 | 1 |
| | H | | 0 |

MODE EXPLANATION


<S-terminal input mode>

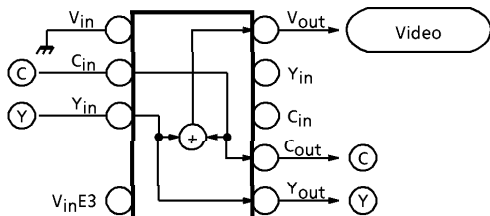


<Video input mode>

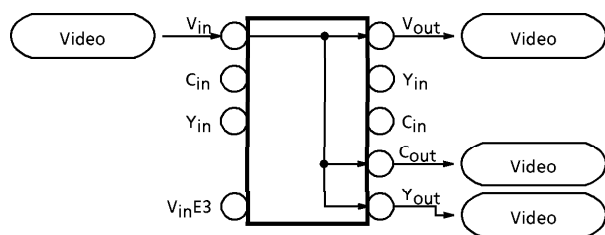

<Comb.1 input mode>

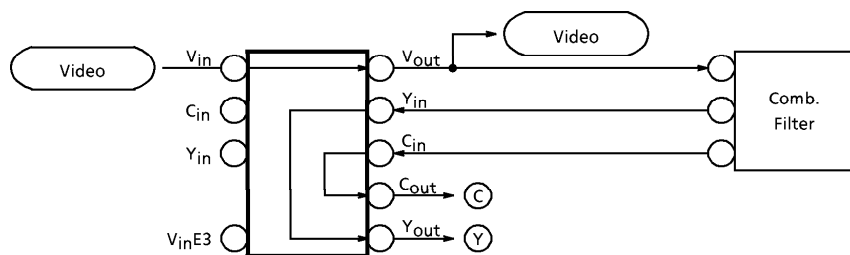



<Comb.2 input mode>

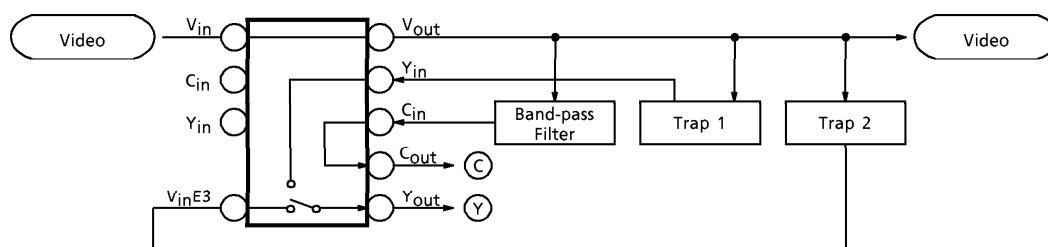




I²C BUS CONTROLLED FORMAT SUMMARY

Bus Controlled format of TA8851CN is based on I²C Bus Control format of Philips.

Data transfer format

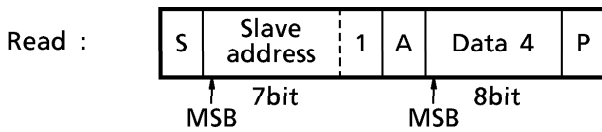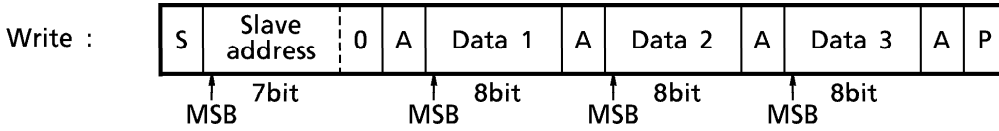

S : Start Condition
P : Stop Condition
A : Acknowledge

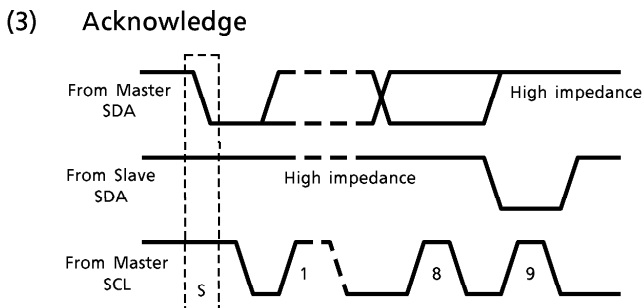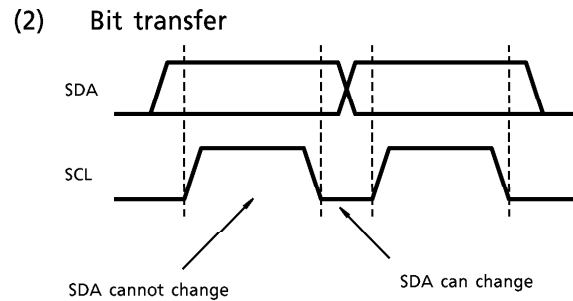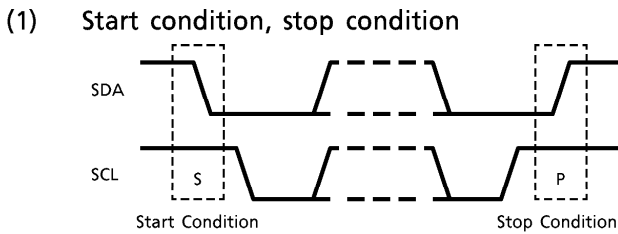

(4) Slave address


| A6 | A5 | A4 | A3 | A2 | A1 | A0 | R/W |
|----|----|----|----|----|----|----|-----|
| 1 | 0 | 0 | 1 | 0 | 0 | 0 | 1/0 |

Purchase of TOSHIBA I²C components conveys a license under the Philips I²C Patent Rights to use these components in an I²C system, provided that the system conforms to the I²C Standard Specification as defined by Philips.

MAXIMUM RATINGS (Ta = 25°C)

| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|-----------------------|-------------------|-------------|------------------|
| Supply Voltage | V _{CC} | 13 | V |
| Power Dissipation | P _{Dmax} | 1923 (Note) | mW |
| Input Signal Voltage | e _{in} | 5 | V _{p-p} |
| Operating Temperature | T _{opr} | - 20~65 | °C |
| Storage Temperature | T _{stg} | - 55~150 | °C |

(Note) When using the device at above Ta = 25°C, decrease the power dissipation by 15.4mW for each increase of 1°C.

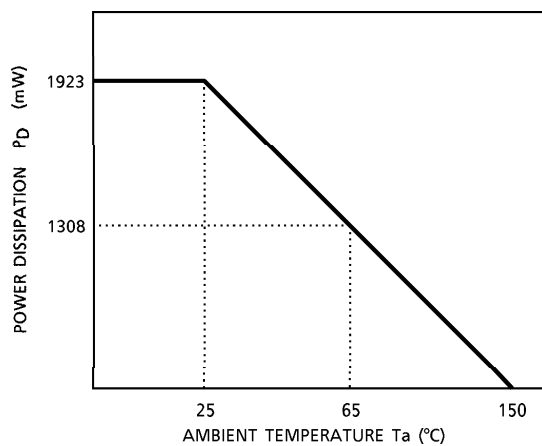

RECOMMENDED OPERATING CONDITION

| PIN No. | PIN NAME | MIN. | TYP. | MAX. | UNIT |
|---------|-----------------|------|------|------|------|
| 18 | V _{CC} | 8.1 | 9.0 | 9.9 | V |

ELECTRICAL CHARACTERISTICS

DC CHARACTERISTICS

DC voltage characteristics (Unless other wise specified, $V_{CC} = 9V$, $T_a = 25^{\circ}C$)

| PIN No. | PIN NAME | SYMBOL | TEST CIR-CUIT | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------|---------------------|-----------------|---------------|----------------|------|------|------|------|
| 1 | L _{in} E2 | V ₁ | 1 | — | 5.0 | 5.2 | 5.4 | V |
| 2 | V _{in} E2 | V ₂ | | — | 5.0 | 5.2 | 5.4 | |
| 3 | R _{in} E2 | V ₃ | | — | 5.0 | 5.2 | 5.4 | |
| 4 | L _{in} E1 | V ₄ | | — | 5.0 | 5.2 | 5.4 | |
| 5 | V _{in} E1 | V ₅ | | — | 5.0 | 5.2 | 5.4 | |
| 6 | R _{in} E1 | V ₆ | | — | 5.0 | 5.2 | 5.4 | |
| 7 | V _{in} S1 | V ₇ | | — | 5.0 | 5.2 | 5.4 | |
| 8 | L _{in} S1 | V ₈ | | — | 5.0 | 5.2 | 5.4 | |
| 9 | Y _{in} S1 | V ₉ | | — | 5.0 | 5.2 | 5.4 | |
| 10 | R _{in} S1 | V ₁₀ | | — | 5.0 | 5.2 | 5.4 | |
| 11 | C _{in} S1 | V ₁₁ | | — | 5.0 | 5.2 | 5.4 | |
| 13 | V _{in} S2 | V ₁₃ | | — | 5.0 | 5.2 | 5.4 | |
| 14 | L _{in} S2 | V ₁₄ | | — | 5.0 | 5.2 | 5.4 | |
| 15 | Y _{in} S2 | V ₁₅ | | — | 5.0 | 5.2 | 5.4 | |
| 16 | R _{in} S2 | V ₁₆ | | — | 5.0 | 5.2 | 5.4 | |
| 17 | C _{in} S2 | V ₁₇ | | — | 5.0 | 5.2 | 5.4 | |
| 19 | V _{in} S3 | V ₁₉ | | — | 5.0 | 5.2 | 5.4 | |
| 20 | L _{in} S3 | V ₂₀ | | — | 5.0 | 5.2 | 5.4 | |
| 21 | Y _{in} S3 | V ₂₁ | | — | 5.0 | 5.2 | 5.4 | |
| 22 | R _{in} S3 | V ₂₂ | | — | 5.0 | 5.2 | 5.4 | |
| 23 | C _{in} S3 | V ₂₃ | | — | 5.0 | 5.2 | 5.4 | |
| 25 | MUTE | V ₂₅ | | — | — | 1.5 | — | |
| 26 | SDA | V ₂₆ | | — | — | 4.2 | — | |
| 27 | SCL | V ₂₇ | | — | — | 4.2 | — | |
| 28 | I/O1 | V ₂₈ | | — | 8.5 | 9.0 | — | |
| 29 | I/O2 | V ₂₉ | | — | 8.5 | 9.0 | — | |
| 30 | C _{in} 2 | V ₃₀ | | — | 5.0 | 5.2 | 5.4 | |
| 31 | O3 | V ₃₁ | | — | 8.5 | 9.0 | — | |
| 32 | C _{out} 2 | V ₃₂ | | — | 3.4 | 3.7 | 4.0 | |
| 33 | R _{out} 2 | V ₃₃ | | — | 3.7 | 4.0 | 4.3 | |
| 34 | Y _{out} 2 | V ₃₄ | | — | 3.4 | 3.7 | 4.0 | |
| 35 | L _{out} 2 | V ₃₅ | | — | 3.7 | 4.0 | 4.3 | |
| 36 | V _{out} 2 | V ₃₆ | | — | 2.3 | 2.8 | 3.3 | |
| 37 | CLAMP2 | V ₃₇ | | — | 2.7 | 3.2 | 3.7 | |
| 38 | Y _{in} 2 | V ₃₈ | | — | 5.0 | 5.2 | 5.4 | |
| 39 | R _{out} TV | V ₃₉ | | — | 3.7 | 4.0 | 4.3 | |
| 40 | C _{in} 1 | V ₄₀ | | — | 5.0 | 5.2 | 5.4 | |
| 41 | L _{out} TV | V ₄₁ | | — | 3.7 | 4.0 | 4.3 | |
| 42 | C _{out} 1 | V ₄₂ | | — | 3.4 | 3.7 | 4.0 | |
| 43 | R _{out} 1 | V ₄₃ | | — | 3.7 | 4.0 | 4.3 | |

| PIN No. | PIN NAME | SYMBOL | TEST CIR-CUIT | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------|-------------------|--------|---------------|----------------|------|------|------|------|
| 44 | Y _{out1} | V44 | 1 | — | 3.4 | 3.7 | 4.0 | V |
| 45 | L _{out1} | V45 | | — | 3.7 | 4.0 | 4.3 | |
| 46 | V _{out1} | V46 | | — | 2.3 | 2.8 | 3.3 | |
| 47 | CLAMP1 | V47 | | — | 2.7 | 3.2 | 3.7 | |
| 48 | Y _{in1} | V48 | | — | 5.0 | 5.2 | 5.4 | |
| 49 | R _{inE3} | V49 | | — | 5.0 | 5.2 | 5.4 | |
| 50 | V _{inE3} | V50 | | — | 5.0 | 5.2 | 5.4 | |
| 51 | L _{inE3} | V51 | | — | 5.0 | 5.2 | 5.4 | |
| 52 | R _{inE4} | V52 | | — | 5.0 | 5.2 | 5.4 | |
| 53 | V _{inE4} | V53 | | — | 5.0 | 5.2 | 5.4 | |
| 54 | L _{inE4} | V54 | | — | 5.0 | 5.2 | 5.4 | |

DC current characteristics (Unless other wise specified, V_{CC} = 9V, Ta = 25°C)

| PIN No. | PIN NAME | SYMBOL | TEST CIR-CUIT | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------|-----------------|-----------------|---------------|----------------|------|------|------|------|
| 18 | V _{CC} | I _{CC} | 1 | — | 48 | 60 | 80 | mA |

AC CHARACTERISTICS (Unless otherwise specified, V_{CC} = 9V, Ta = 25°C)

| CHARACTERISTIC | SYMBOL | TEST CIR-CUIT | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|-------------------------------|--------------------------------|---------------|-------------------|------|------|------|------------------|
| Clamp Current | I _{DIS} | 2 | Discharge current | 11 | 17 | 28 | μA |
| | I _{CHR} | | charge current | 0.50 | 1.25 | 1.80 | mA |
| Output Resistance | R _{M-AUD} | 2 | — | 50 | 100 | 150 | Ω |
| | R _{S-AUD} | | — | 65 | 130 | 195 | |
| | R _{T-AUD} | | — | 40 | 80 | 120 | |
| | R _{M-VID} | | — | 25 | 50 | 75 | |
| | R _{S-VID} | | — | 50 | 100 | 150 | |
| | R _{M-Y/C} | | — | 25 | 50 | 75 | |
| Input Resistance | R _{iAUD} | 2 | — | 49 | 70 | 100 | kΩ |
| | R _{iVID} | | — | 20 | 30 | 40 | |
| | R _{iY/C} | | — | 20 | 30 | 40 | |
| Video Input Dynamic Range | (Main) V _{dVID1} | 2 | (Note 1) | 1.6 | 2.1 | — | V _{p-p} |
| | (Sub) V _{dVID2} | | | 1.6 | 2.1 | — | |
| | (Clamp off) V _{dVID3} | | | 2.4 | 2.8 | — | |
| Y/C Input Dynamic Range | (Main) V _{dY/C1} | 2 | (Note 2) | 2.4 | 2.8 | — | V _{p-p} |
| | (Sub) V _{dY/C2} | | | 2.4 | 2.8 | — | |
| Comb Input Dynamic Range | (Main) V _{dCOM1} | 2 | (Note 2) | 5.1 | 6.5 | — | V _{p-p} |
| | (Sub) V _{dCOM2} | | | 5.1 | 6.5 | — | |
| S Video Dynamic Range | (Main) V _{dS-v1} | 2 | (Note 3) | 1.6 | 2.1 | — | V _{p-p} |
| | (Sub) V _{dS-v2} | | | 1.6 | 2.1 | — | |
| | (Clamp off) V _{dS-v3} | | | 2.4 | 2.8 | — | |
| Monochrome Mode Dynamic Range | (Main) V _{dB/W1} | 2 | (Note 4) | 1.6 | 2.1 | — | V _{p-p} |
| | (Sub) V _{dB/W2} | | | 1.6 | 2.1 | — | |

| CHARACTERISTIC | SYMBOL | TEST CIRCUIT | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|----------------------------------|-------------|---------------------|----------------|------|------|------|------------------|
| Video Gain | (Main) | G _{VID1} | (Note 5) | 5.7 | 6.2 | 6.7 | dB |
| | (Sub) | G _{VID2} | | 5.7 | 6.2 | 6.7 | |
| | (Clamp Off) | G _{VID3} | | 5.8 | 6.3 | 6.8 | |
| Y / C Gain | (Main) | G _{Y / C1} | (Note 6) | 5.9 | 6.4 | 6.9 | dB |
| | (Sub) | G _{Y / C2} | | 5.9 | 6.4 | 6.9 | |
| Comb Gain | (Main) | G _{COM1} | (Note 6) | -0.5 | 0 | 0.5 | dB |
| | (Sub) | G _{COM2} | | -0.5 | 0 | 0.5 | |
| S Video Gain | (Main) | G _{S-V1} | (Note 7) | 5.7 | 6.2 | 6.7 | dB |
| | (Sub) | G _{S-V2} | | 5.7 | 6.2 | 6.7 | |
| | (Clamp Off) | G _{S-V3} | | 6.0 | 6.5 | 7.0 | |
| B / W Mode Gain | (Main) | G _{B / W1} | (Note 8) | 5.7 | 6.2 | 6.7 | dB |
| | (Sub) | G _{B / W2} | | 5.7 | 6.2 | 6.7 | |
| Video Switch Crosstalk | (Main) | C _{VID1} | (Note 9) | 50 | 60 | — | dB |
| | (Sub) | C _{VID2} | | 50 | 60 | — | |
| | (Clamp Off) | C _{VID3} | (Note 12) | 50 | 60 | — | |
| Y Switch Crosstalk | (Main) | C _{Y1} | (Note 10) | 50 | 60 | — | dB |
| | (Sub) | C _{Y2} | | 50 | 60 | — | |
| C Switch Crosstalk | (Main) | C _{C1} | (Note 11) | 50 | 60 | — | dB |
| | (Sub) | C _{C2} | | 50 | 60 | — | |
| Video Mute Attenuation | | G _{VM} | (Note 13) | 50 | 60 | — | dB |
| Video Frequency Response | (Main) | f _{VID1} | (Note 14) | 9.0 | — | — | MHz |
| | (Sub) | f _{VID2} | | 9.0 | — | — | |
| | (Clamp Off) | f _{VID3} | | 9.0 | — | — | |
| Y / C Frequency Response | (Main) | f _{Y / C1} | (Note 15) | 9.0 | — | — | MHz |
| | (Sub) | f _{Y / C2} | | 9.0 | — | — | |
| Comb Frequency Response | (Main) | f _{COM1} | (Note 15) | 9.0 | — | — | MHz |
| | (Sub) | f _{COM2} | | 9.0 | — | — | |
| S Video Frequency Response | (Main) | f _{S-V1} | (Note 16) | 9.0 | — | — | MHz |
| | (Sub) | f _{S-V2} | | 9.0 | — | — | |
| | (Clamp Off) | f _{S-V3} | | 9.0 | — | — | |
| B / W Mode Frequency Response | (Main) | f _{B / W1} | (Note 17) | 9.0 | — | — | MHz |
| | (Sub) | f _{B / W2} | | 9.0 | — | — | |
| Clamp Level | | C _L | (Note 18) | — | 21 | — | % |
| Audio Dynamic Range | | V _{dAUD} | (Note 19) | 5.0 | 6.0 | — | V _{p-p} |
| Audio Gain | | G _{AUD} | (Note 20) | -0.5 | 0 | 0.5 | dB |
| Audio Frequency Response | | f _{AUD} | (Note 21) | 0.1 | 3.0 | — | MHz |
| Audio Switch Crosstalk | | C _{AUD} | (Note 22) | 60 | 70 | — | dB |
| Audio Mute Attenuation | | G _{AM} | (Note 23) | 60 | 70 | — | dB |
| Audio Select Offset | | ΔV _{AUD} | (Note 24) | -30 | 0 | 30 | mV |
| S Input Discriminating Voltage | | V _{thS} | (Note 25) | 2.4 | 2.6 | 2.8 | V |
| ADC Input Discriminating Voltage | | V _{thADC} | (Note 26) | 1.8 | 2.3 | 2.8 | V |
| External Mute-ON Voltage | | V _{thMUTE} | (Note 27) | 1.0 | 1.5 | 2.0 | V |
| DAC Output Low Level Voltage | | V _{DAC} | (Note 28) | 0 | — | 0.5 | V |

TEST CONDITIONS

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, Ta = 25 ± 3°C) | | MEASUREMENT METHOD |
|-------|---|--|--------|---|
| | | SW & VR MODE | DATA 2 | |
| 1-(1) | V Input Dynamic Range (Main) | V _{in} E2 | DATA 2 | (1) V ₁ 15kHz, variable-amplitude input. (2) For each, measure the amplitude of V ₁ at which the waveform on pin 46 is distorted. |
| | | V _{in} E1 | DATA 2 | |
| 1-(2) | V Input Dynamic Range (Sub) | V _{in} E2 | DATA 3 | (1) V ₁ 15kHz, Variable-amplitude input. (2) For each, measure the amplitude of V ₁ at which the waveform on pin 36 is distorted. |
| | | V _{in} E1 | DATA 3 | |
| 1-(3) | V Input Dynamic Range (Clamp Off) (Main) | V _{in} E2 | DATA 2 | (1) V ₁ 15kHz, Variable-amplitude input, V ₃ = 0V. (2) For each, measure the amplitude of V ₁ at which the waveform on pin 46 is distorted. |
| | | V _{in} E1 | DATA 2 | |
| 1-(4) | V Input Dynamic Range (Clamp Off) (Sub) | V _{in} E2 | DATA 3 | (1) V ₁ 15kHz, variable-amplitude input, V ₃ = 0V. (2) For each, measure the amplitude of V ₁ at which the waveform on pin 36 is distorted. |
| | | V _{in} E1 | DATA 3 | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | |
|--------------------|-------------------------------------|--|------------------------------------|---|
| | | SW & VR MODE | | |
| | | SW MODE | DATA 2 | MEASUREMENT METHOD |
| 2-(1) | YC Input Dynamic Range (Main) | Y _{in} S1 | 11111011 | Measure the amplitude in the same way using pin 44. |
| | | Y _{in} S2 | 11111010 | |
| | | Y _{in} S3 | 11111001 | |
| | | Y _{in} 1 | 0101**** | |
| | | V _{in} E3 | 0100**** | |
| | | C _{in} S1 | 11111011 | |
| | | C _{in} S2 | 11111010 | |
| | | C _{in} S3 | 11111001 | |
| | | C _{in} 1 | 0101**** | |
| | | 2-(2) | YC Input Dynamic Range (Sub) | |
| Y _{in} S2 | 11111011 | | | |
| Y _{in} S3 | 11111010 | | | |
| Y _{in} 2 | 11111001 | | | |
| V _{in} E4 | 0101**** | | | |
| C _{in} S1 | 0100**** | | | |
| C _{in} S2 | 11111011 | | | |
| C _{in} S3 | 11111010 | | | |
| C _{in} 2 | 11111001 | | | |
| 3-(1) | S Video Dynamic Range (Main) | | | Y _{in} S1 |
| | | Y _{in} S2 | 11111011 | |
| | | Y _{in} S3 | 11111010 | |
| | | C _{in} S1 | 11111001 | |
| | | C _{in} S2 | 11111011 | |
| | | C _{in} S3 | 11111010 | |
| | | Y _{in} 1 | 11111001 | |
| | | Y _{in} 2 | 11111010 | |
| | | Y _{in} 3 | 11111011 | |
| | | Y _{in} 4 | 11111001 | |
| 3-(2) | S Video Dynamic Range (Sub) | Y _{in} S1 | DATA 3 | Measure the amplitude in the same way using pin 36. |
| | | Y _{in} S2 | 11111011 | |
| | | Y _{in} S3 | 11111010 | |
| | | C _{in} S1 | 11111001 | |
| | | C _{in} S2 | 11111011 | |
| | | C _{in} S3 | 11111010 | |
| | | Y _{in} 1 | 11111001 | |
| | | Y _{in} 2 | 11111010 | |
| | | Y _{in} 3 | 11111011 | |
| | | Y _{in} 4 | 11111001 | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | | | MEASUREMENT METHOD |
|--------------------|---|--|------------------------------|--------------------|---|--------------------|
| | | SW & VR MODE | | DATA 2 | | |
| | | SW MODE | | | | |
| 3-(3) | S Video Dynamic Range (Clamp Off) (Main) | Y _{in} S1 | S9-a , S47-on, others-b/off | 11111011 | Measure the amplitude in the same way using pin 46. | |
| | | Y _{in} S2 | S15-a , S47-on, others-b/off | 11111010 | | |
| Y _{in} S3 | S21-a , S47-on, others-b/off | 11111001 | | | | |
| C _{in} S1 | S11-a , S47-on, others-b/off | 11111011 | | | | |
| C _{in} S2 | S17-a , S47-on, others-b/off | 11111010 | | | | |
| C _{in} S3 | S23-a , S47-on, others-b/off | 11111001 | | | | |
| 3-(4) | S Video Dynamic Range (Clamp Off) (Sub) | Y _{in} S1 | S9-a , S37-on, others-b/off | DATA 3 11111011 | Measure the amplitude in the same way using pin 36. | |
| | | Y _{in} S2 | S15-a , S37-on, others-b/off | 11111010 | | |
| Y _{in} S3 | S21-a , S37-on, others-b/off | 11111001 | | | | |
| C _{in} S1 | S11-a , S37-on, others-b/off | 11111011 | | | | |
| C _{in} S2 | S17-a , S37-on, others-b/off | 11111010 | | | | |
| C _{in} S3 | S23-a , S37-on, others-b/off | 11111001 | | | | |
| 4-(1) | B / W Mode Dynamic Range (Main) | V _{in} E2 | S2-a , others-b / off | DATA 2 10100110 | Measure the amplitude in the same way using pins 44 and 42 to find the smaller one. | |
| | | V _{in} E1 | S5-a , others-b / off | 10100111 | | |
| V _{in} S1 | S7A-a , others-b / off | 10100011 | | | | |
| V _{in} S2 | S13A-a, others-b / off | 10100010 | | | | |
| V _{in} S3 | S19A-a, others-b / off | 10100001 | | | | |
| V _{in} E3 | S50-a , others-b / off | 10100101 | | | | |
| V _{in} E4 | S53-a , others-b / off | 10100100 | | | | |
| 4-(2) | B / W Mode Dynamic Range (Sub) | V _{in} E2 | S2-a , others-b / off | DATA 3 10100110 | Measure the amplitude in the same way using pins 34 and 32 to find the smaller one. | |
| | | V _{in} E1 | S5-a , others-b / off | 10100111 | | |
| V _{in} S1 | S7A-a , others-b / off | 10100011 | | | | |
| V _{in} S2 | S13A-a, others-b / off | 10100010 | | | | |
| V _{in} S3 | S19A-a, others-b / off | 10100001 | | | | |
| V _{in} E3 | S50-a , others-b / off | 10100101 | | | | |
| V _{in} E4 | S53-a , others-b / off | 10100100 | | | | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | | |
|--------------------|-------------------------------------|--|-------------------------------|--------------------|---|
| | | SW & VR MODE | | MEASUREMENT METHOD | |
| | | SW MODE | DATA 2 | | |
| 5-(1) | Video Gain (Main) | V _{in} E2 | S2-a , others-b / off | ****0110 | (1) V ₁ 15kHz, 1V _{p-p} input. (2) For each, measure the amplitude on pin 46 to find the gain. |
| | | V _{in} E1 | S5-a , others-b / off | ****0111 | |
| V _{in} S1 | S7A-a , others-b / off | ****0011 | | | |
| V _{in} S2 | S13A-a , others-b / off | ****0010 | | | |
| V _{in} S3 | S19A-a , others-b / off | ****0001 | | | |
| V _{in} E3 | S50-a , others-b / off | ****0101 | | | |
| V _{in} E4 | S53-a , others-b / off | ****0100 | | | |
| | | DATA 3 | | | |
| 5-(2) | Video Gain (Sub) | V _{in} E2 | S2-a , others-b / off | ****0110 | (1) V ₁ 15kHz, 1V _{p-p} input. (2) For each, measure the amplitude on pin 36 to find the gain. |
| | | V _{in} E1 | S5-a , others-b / off | ****0111 | |
| V _{in} S1 | S7A-a , others-b / off | ****0011 | | | |
| V _{in} S2 | S13A-a , others-b / off | ****0010 | | | |
| V _{in} S3 | S19A-a , others-b / off | ****0001 | | | |
| V _{in} E3 | S50-a , others-b / off | ****0101 | | | |
| V _{in} E4 | S53-a , others-b / off | ****0100 | | | |
| | | DATA 3 | | | |
| 5-(3) | Video Gain (Clamp Off) (Main) | V _{in} E2 | S2-a , S47-on, others-b / off | ****0110 | (1) V ₁ 15kHz, 1V _{p-p} input. (2) For each, measure the amplitude on pin 46 to find the gain. |
| | | V _{in} E1 | S5-a , S47-on, others-b / off | ****0111 | |
| V _{in} S1 | S7A-a , S47-on, others-b / off | ****0011 | | | |
| V _{in} S2 | S13A-a , S47-on, others-b / off | ****0010 | | | |
| V _{in} S3 | S19A-a , S47-on, others-b / off | ****0001 | | | |
| V _{in} E3 | S50-a , S47-on, others-b / off | ****0101 | | | |
| V _{in} E4 | S53-a , S47-on, others-b / off | ****0100 | | | |
| | | DATA 2 | | | |
| 5-(4) | Video Gain (Clamp Off) (Sub) | V _{in} E2 | S2-a , S37-on, others-b / off | ****0110 | (1) V ₁ 15kHz, 1V _{p-p} input. (2) For each, measure the amplitude on pin 36 to find the gain. |
| | | V _{in} E1 | S5-a , S37-on, others-b / off | ****0111 | |
| V _{in} S1 | S7A-a , S37-on, others-b / off | ****0011 | | | |
| V _{in} S2 | S13A-a , S37-on, others-b / off | ****0010 | | | |
| V _{in} S3 | S19A-a , S37-on, others-b / off | ****0001 | | | |
| V _{in} E3 | S50-a , S37-on, others-b / off | ****0101 | | | |
| V _{in} E4 | S53-a , S37-on, others-b / off | ****0100 | | | |
| | | DATA 3 | | | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | | | | | |
|--------------------|----------------------------------|--|----------------------------------|--------------------|---|---|----------|---|
| | | SW & VR MODE | | MEASUREMENT METHOD | | | | |
| | | SW MODE | DATA 2 | | | | | |
| 6-(1) | Y/C Gain (Main) | Y _{in} S1 | S ₉ -a, others-b/off | 11111011 | Measure the amplitude in the same way using pin 44. | | | |
| | | Y _{in} S2 | S ₁₅ -a, others-b/off | 11111010 | | | | |
| | | Y _{in} S3 | S ₂₁ -a, others-b/off | 11111001 | | | | |
| | | Y _{in} 1 | S ₄₈ -a, others-b/off | 0101**** | | | | |
| | | V _{in} E3 | S ₅₀ -a, others-b/off | 0100**** | | | | |
| | | C _{in} S1 | S ₁₁ -a, others-b/off | 11111011 | | | | |
| | | C _{in} S2 | S ₁₇ -a, others-b/off | 11111010 | | | | |
| | | C _{in} S3 | S ₂₃ -a, others-b/off | 11111001 | | | | |
| 6-(2) | Y/C Gain (Sub) | C _{in} 1 | S ₄₀ -a, others-b/off | 0101**** | Measure the amplitude in the same way using pin 42. | | | |
| | | Y _{in} S1 | S ₉ -a, others-b/off | DATA 3 | | Measure the amplitude in the same way using pin 34. | | |
| | | | | 11111011 | | | | |
| | | | | 11111010 | | | | |
| | | Y _{in} S2 | S ₁₅ -a, others-b/off | 11111010 | | | | |
| | | Y _{in} S3 | S ₂₁ -a, others-b/off | 11111001 | | | | |
| | | Y _{in} 2 | S ₃₈ -a, others-b/off | 0101**** | | | | |
| | | V _{in} E4 | S ₅₃ -a, others-b/off | 0100**** | | | | |
| | | C _{in} S1 | S ₁₁ -a, others-b/off | 11111011 | | | | |
| | | C _{in} S2 | S ₁₇ -a, others-b/off | 11111010 | | | | |
| | | C _{in} S3 | S ₂₃ -a, others-b/off | 11111001 | | | | |
| | | C _{in} 2 | S ₃₀ -a, others-b/off | 0101**** | | | | |
| 7-(1) | S Video Gain (Main) | Y _{in} S1 | S ₉ -a, others-b/off | DATA 2 | Measure the amplitude in the same way using pin 46. | | | |
| | | Y _{in} S2 | S ₁₅ -a, others-b/off | 11111011 | | | | |
| | | Y _{in} S3 | S ₂₁ -a, others-b/off | 11111010 | | | | |
| | | C _{in} S1 | S ₁₁ -a, others-b/off | 11111001 | | | | |
| | | C _{in} S2 | S ₁₇ -a, others-b/off | 11111010 | | | | |
| | | C _{in} S3 | S ₂₃ -a, others-b/off | 11111001 | | | | |
| | | 7-(2) | S Video Gain (Sub) | Y _{in} S1 | | S ₉ -a, others-b/off | DATA 3 | Measure the amplitude in the same way using pin 36. |
| | | | | Y _{in} S2 | | S ₁₅ -a, others-b/off | 11111011 | |
| Y _{in} S3 | S ₂₁ -a, others-b/off | | | 11111010 | | | | |
| C _{in} S1 | S ₁₁ -a, others-b/off | | | 11111001 | | | | |
| C _{in} S2 | S ₁₇ -a, others-b/off | | | 11111010 | | | | |
| C _{in} S3 | S ₂₃ -a, others-b/off | | | 11111001 | | | | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | | | |
|--------------------|---------------------------------------|--|-----------------------------|--------------------|---|--------|
| | | SW & VR MODE | | MEASUREMENT METHOD | | |
| | | SW MODE | DATA 2 | | | |
| 7-(3) | S Video Gain (Clamp Off) (Sub) | Y _{in} S1 | S9-a, S37-on, others-b/off | 11111011 | Measure the amplitude in the same way using pin 36. | |
| | | Y _{in} S2 | S15-a, S37-on, others-b/off | 11111010 | | |
| | | Y _{in} S3 | S21-a, S37-on, others-b/off | 11111001 | | |
| C _{in} S1 | S11-a, S37-on, others-b/off | 11111011 | DATA 3 | | | |
| C _{in} S2 | S17-a, S37-on, others-b/off | 11111010 | | | | |
| C _{in} S3 | S23-a, S37-on, others-b/off | 11111001 | | | | |
| 7-(4) | S Video Gain (Clamp Off) (Main) | Y _{in} S1 | S9-a, S47-on, others-b/off | 11111011 | Measure the amplitude in the same way using pin 46. | |
| | | Y _{in} S2 | S15-a, S47-on, others-b/off | 11111010 | | |
| | | Y _{in} S3 | S21-a, S47-on, others-b/off | 11111001 | | |
| C _{in} S1 | S11-a, S47-on, others-b/off | 11111011 | DATA 2 | | | |
| C _{in} S2 | S17-a, S47-on, others-b/off | 11111010 | | | | |
| C _{in} S3 | S23-a, S47-on, others-b/off | 11111001 | | | | |
| 8-(1) | B/W Mode Gain (Main) | V _{in} E2 | S2-a, others-b/off | 10100110 | Measure the amplitude in the same way using pin 44. | |
| | | V _{in} E1 | S5-a, others-b/off | 10100111 | | |
| | | V _{in} S1 | S7A-a, others-b/off | 10100011 | | |
| | | V _{in} S2 | S13A-a, others-b/off | 10100010 | | |
| | | V _{in} S3 | S19A-a, others-b/off | 10100001 | | |
| | | V _{in} E3 | S50-a, others-b/off | 10100101 | | |
| | | V _{in} E4 | S53-a, others-b/off | 10100100 | | |
| | | V _{in} E2 | S2-a, others-b/off | 10100110 | | DATA 2 |
| | | V _{in} E1 | S5-a, others-b/off | 10100111 | | |
| | | V _{in} S1 | S7A-a, others-b/off | 10100011 | | |
| | | V _{in} S2 | S13A-a, others-b/off | 10100010 | | |
| | | V _{in} S3 | S19A-a, others-b/off | 10100001 | | |
| | | V _{in} E3 | S50-a, others-b/off | 10100101 | | |
| | | V _{in} E4 | S53-a, others-b/off | 10100100 | | |
| V _{in} E2 | S2-a, others-b/off | 10100110 | | | | |
| V _{in} E1 | S5-a, others-b/off | 10100111 | | | | |
| V _{in} S1 | S7A-a, others-b/off | 10100011 | DATA 2 | | | |
| V _{in} S2 | S13A-a, others-b/off | 10100010 | | | | |
| V _{in} S3 | S19A-a, others-b/off | 10100001 | | | | |
| V _{in} E3 | S50-a, others-b/off | 10100101 | | | | |
| V _{in} E4 | S53-a, others-b/off | 10100100 | | | | |
| V _{in} E2 | S2-a, others-b/off | 10100110 | | | | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | | |
|----------------|--------------------|--|----------|---|---|
| | | SW & VR MODE | | MEASUREMENT METHOD | |
| | | SW MODE | DATA 3 | | |
| 8-(2) (Sub) | V _{in} E2 | S2-a , others-b / off | 10100110 | Measure the amplitude in the same way using pin 34. | |
| | V _{in} E1 | S5-a , others-b / off | 10100111 | | |
| | V _{in} S1 | S7A-a , others-b / off | 10100011 | | |
| | V _{in} S2 | S13A-a , others-b / off | 10100010 | | |
| | V _{in} S3 | S19A-a , others-b / off | 10100001 | | |
| | V _{in} E3 | S50-a , others-b / off | 10100101 | | |
| | V _{in} E4 | S53-a , others-b / off | 10100100 | | |
| | V _{in} E2 | S2-a , others-b / off | 10100110 | | Measure the amplitude in the same way using pin 32. |
| | V _{in} E1 | S5-a , others-b / off | 10100111 | | |
| | V _{in} S1 | S7A-a , others-b / off | 10100011 | | |
| | V _{in} S2 | S13A-a , others-b / off | 10100010 | | |
| | V _{in} S3 | S19A-a , others-b / off | 10100001 | | |
| | V _{in} E3 | S50-a , others-b / off | 10100101 | | |
| | V _{in} E4 | S53-a , others-b / off | 10100100 | | |
| | | | | | |

| NOTE | ITEM | | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, VCC=9V, Ta=25±3°C) | | | |
|--------|---------------------------|--------------|--|----------|---|--------------------|
| | | | SW & VR MODE | | MEASUREMENT METHOD | |
| | | | SW MODE | DATA 2 | DATA 2 | MEASUREMENT METHOD |
| 9-(1) | V Switch Crosstalk (Main) | VinE2 | All-b/off except those specified on the left | DATA 2 | (1) V1 3.58MHz, 1Vp-p input. (2) While sequentially switching S2, S5, S7A, S9, S11, S13A, S15, S17, S19A, S21, S23, S30, S38, S40, S48, S50, and S53 to 'a', measure the maximum level of crosstalk to pin 46 and find its ratio to output in selected mode. | |
| | | VinE1 | All-b/off except those specified on the left | ****0110 | | |
| 9-(2) | V Switch Crosstalk (Sub) | VinS1 | All-b/off except those specified on the left | DATA 3 | (1) V1 3.58MHz, 1Vp-p input. (2) While sequentially switching S2, S5, S7A, S9, S11, S13A, S15, S17, S19A, S21, S23, S30, S38, S40, S48, S50, and S53 to 'a', measure the maximum level of crosstalk to pin 36 and find its ratio to output in selected mode. | |
| | | VinS2 | All-b/off except those specified on the left | ****0111 | | |
| 10-(1) | Y Switch Crosstalk (Main) | VinS3 | All-b/off except those specified on the left | DATA 2 | Measure the maximum level of crosstalk in the same way using pin 44. | |
| | | VinE3 | All-b/off except those specified on the left | 1111011 | | |
| 10-(2) | Y Switch Crosstalk (Sub) | VinE4 | All-b/off except those specified on the left | DATA 3 | Measure the maximum level of crosstalk in the same way using pin 34. | |
| | | YinS1, CinS1 | All-b/off except those specified on the left | 1111010 | | |
| | | YinS2, CinS2 | All-b/off except those specified on the left | 1111010 | | |
| | | YinS3, CinS3 | All-b/off except those specified on the left | 1111001 | | |
| | | Yin1 | All-b/off except those specified on the left | 0101**** | | |
| | | VinE3 | All-b/off except those specified on the left | 0100**** | | |
| | | YinS1 | All-b/off except those specified on the left | DATA 3 | | |
| | | YinS2 | All-b/off except those specified on the left | 1111011 | | |
| | | YinS3 | All-b/off except those specified on the left | 1111010 | | |
| | | Yin2 | All-b/off except those specified on the left | 1111001 | | |
| | | VinE3 | All-b/off except those specified on the left | 0101**** | | |
| | | VinE3 | All-b/off except those specified on the left | 0100**** | | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | | | | | |
|--|--|--|--|--------------------|--|--|--------------------|--|
| | | SW & VR MODE | | MEASUREMENT METHOD | | | | |
| | | SW MODE | DATA 2 | | | | | |
| 11-(1) | C Switch Crosstalk (Main) | C _{in} S1 | All-b/off except those specified on the left | 11111011 | Measure the maximum level of crosstalk in the same way using pin 42. | | | |
| | | C _{in} S2 | All-b/off except those specified on the left | 11111010 | | | | |
| | | C _{in} S3 | All-b/off except those specified on the left | 11111001 | | | | |
| | | C _{in} 1 | All-b/off except those specified on the left | 0101**** | | | | |
| 11-(2) | C Switch Crosstalk (Sub) | C _{in} S1 | All-b/off except those specified on the left | DATA 3 11111011 | Measure the maximum level of crosstalk in the same way using pin 32. | | | |
| | | C _{in} S2 | All-b/off except those specified on the left | 11111010 | | | | |
| | | C _{in} S3 | All-b/off except those specified on the left | 11111001 | | | | |
| | | C _{in} 2 | All-b/off except those specified on the left | 0101**** | | | | |
| 12-(1) | V Switch Crosstalk (Clamp Off) (Main) | V _{in} E2 | All-b/off except those specified on the left | DATA 2 ****0110 | (1) S47-ON, V ₃ = 0V. (2) Measure the maximum level of crosstalk in the same way using pin 46. | | | |
| | | V _{in} E1 | All-b/off except those specified on the left | ****0111 | | | | |
| | | V _{in} S1 | All-b/off except those specified on the left | ****0011 | | | | |
| | | V _{in} S2 | All-b/off except those specified on the left | ****0010 | | | | |
| | | V _{in} S3 | All-b/off except those specified on the left | ****0001 | | | | |
| | | V _{in} E3 | All-b/off except those specified on the left | ****0101 | | | | |
| | | V _{in} E4 | All-b/off except those specified on the left | ****0100 | | | | |
| | | Y _{in} S1, C _{in} S1 | All-b/off except those specified on the left | ****1011 | | | | |
| | | Y _{in} S2, C _{in} S2 | All-b/off except those specified on the left | ****1010 | | | | |
| | | Y _{in} S3, C _{in} S3 | All-b/off except those specified on the left | ****1001 | | | | |
| | | 12-(2) | V Switch Crosstalk (Clamp Off) (Sub) | V _{in} E2 | | All-b/off except those specified on the left | DATA 3 ****0110 | (1) S37-ON, V ₃ = 0V. (2) Measure the maximum level of crosstalk in the same way using pin 36. |
| | | | | V _{in} E1 | | All-b/off except those specified on the left | ****0111 | |
| V _{in} S1 | All-b/off except those specified on the left | | | ****0011 | | | | |
| V _{in} S2 | All-b/off except those specified on the left | | | ****0010 | | | | |
| V _{in} S3 | All-b/off except those specified on the left | | | ****0001 | | | | |
| V _{in} E3 | All-b/off except those specified on the left | | | ****0101 | | | | |
| V _{in} E4 | All-b/off except those specified on the left | | | ****0100 | | | | |
| Y _{in} S1, C _{in} S1 | All-b/off except those specified on the left | | | ****1011 | | | | |
| Y _{in} S2, C _{in} S2 | All-b/off except those specified on the left | | | ****1010 | | | | |
| Y _{in} S3, C _{in} S3 | All-b/off except those specified on the left | | | ****1001 | | | | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | MEASUREMENT METHOD |
|--|--|--|--|---|
| | | SW & VR MODE | | |
| | | SW MODE | DATA 2 | |
| 13 | V _{out1} Output | All-b/off except those specified on the left | ***00000 | (1) V ₁ 3.58MHz, 1V _{p-p} input. (2) While sequentially switching S ₂ , S ₅ , S _{7A} , S ₉ , S ₁₁ , S _{13A} , S ₁₅ , S ₁₇ , S _{19A} , S ₂₁ , S ₂₃ , S ₃₀ , S ₃₈ , S ₄₀ , S ₄₈ , S ₅₀ , and S ₅₃ to 'a', measure the maximum level of crosstalk to pin 46 and find its ratio to output in selected mode. |
| | | All-b/off except those specified on the left | 00***** | Measure the maximum level of crosstalk in the same way using pin 44. |
| | C _{out1} Output | All-b/off except those specified on the left | 00***** | Measure the maximum level of crosstalk in the same way using pin 42. |
| | | | DATA 3 | |
| | V _{out2} Output | All-b/off except those specified on the left | ***00000 | Measure the maximum level of crosstalk in the same way using pin 36. |
| | Y _{out2} Output | All-b/off except those specified on the left | 00***** | Measure the maximum level of crosstalk in the same way using pin 34. |
| | | All-b/off except those specified on the left | 00***** | Measure the maximum level of crosstalk in the same way using pin 32. |
| | C _{out2} Output | | DATA 2 | |
| | | All-b/off except those specified on the left | ***00000 | (1) S ₄₇ -ON, V ₃ = 0V (2) Measure the maximum level of crosstalk in the same way using pin 46. |
| | V _{out1} Output (Clamp Off) | | DATA 3 | |
| All-b/off except those specified on the left | | ***00000 | (1) S ₄₇ -ON, V ₃ = 0V (2) Measure the maximum level of crosstalk in the same way using pin 36. | |
| V _{out2} Output (Clamp Off) | | | | |
| | All-b/off except those specified on the left | ***00000 | | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | |
|--------|---|--|---|--|
| | | SW & VR MODE | | |
| | | SW MODE | DATA 2 | MEASUREMENT METHOD |
| 14-(1) | Video Frequency Response (Main) | V _{in} E2 | S2-a , others-b / off | DATA 2 ****0110 |
| | | V _{in} E1 V _{in} S1 V _{in} S2 V _{in} S3 V _{in} E3 V _{in} E4 | S5-a , others-b / off S7A-a , others-b / off S13A-a , others-b / off S19A-a , others-b / off S50-a , others-b / off S53-a , others-b / off | ****0111 ****0011 ****0010 ****0001 ****0101 ****0100 |
| 14-(2) | Video Frequency Response (Sub) | V _{in} E2 | S2-a , others-b / off | DATA 3 ****0110 |
| | | V _{in} E1 V _{in} S1 V _{in} S2 V _{in} S3 V _{in} E3 V _{in} E4 | S5-a , others-b / off S7A-a , others-b / off S13A-a , others-b / off S19A-a , others-b / off S50-a , others-b / off S53-a , others-b / off | ****0111 ****0011 ****0010 ****0001 ****0101 ****0100 |
| 14-(3) | Video Frequency Response (Clamp Off) (Main) | V _{in} E2 | S2-a , S47-on, others-b / off | DATA 2 ****0110 |
| | | V _{in} E1 V _{in} S1 V _{in} S2 V _{in} S3 V _{in} E3 V _{in} E4 | S5-a , S47-on, others-b / off S7A-a , S47-on, others-b / off S13A-a , S47-on, others-b / off S19A-a , S47-on, others-b / off S50-a , S47-on, others-b / off S53-a , S47-on, others-b / off | ****0111 ****0011 ****0010 ****0001 ****0101 ****0100 |
| 14-(4) | Video Frequency Response (Clamp Off) (Sub) | V _{in} E2 | S2-a , S37-on, others-b / off | DATA 3 ****0110 |
| | | V _{in} E1 V _{in} S1 V _{in} S2 V _{in} S3 V _{in} E3 V _{in} E4 | S5-a , S37-on, others-b / off S7A-a , S37-on, others-b / off S13A-a , S37-on, others-b / off S19A-a , S37-on, others-b / off S50-a , S37-on, others-b / off S53-a , S37-on, others-b / off | ****0111 ****0011 ****0010 ****0001 ****0101 ****0100 |

TA8851CN - 28

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | | MEASUREMENT METHOD | | | |
|--------------------|-----------------------------------|--|----------------------------------|--------------------|---|--------------------|---|---|
| | | SW & VR MODE | | | | | | |
| | | SW MODE | DATA 2 | DATA 3 | | | | |
| 15-(1) | Y/C Frequency Response (Main) | Y _{in} S1 | S9-a, others-b/off | 11111011 | Measure the amplitude in the same way using pin 44. | | | |
| | | Y _{in} S2 | S15-a, others-b/off | 11111010 | | | | |
| | | Y _{in} S3 | S21-a, others-b/off | 11111001 | | | | |
| | | Y _{in} 1 | S48-a, others-b/off | 0101**** | | | | |
| | | V _{in} E3 | S50-a, others-b/off | 0100**** | | | | |
| | | C _{in} S1 | S11-a, others-b/off | 11111011 | | | | |
| | | C _{in} S2 | S17-a, others-b/off | 11111010 | | | | |
| | | C _{in} S3 | S23-a, others-b/off | 11111001 | | | | |
| | | C _{in} 1 | S40-a, others-b/off | 0101**** | | | | |
| | | 15-(2) | Y/C Frequency Response (Sub) | Y _{in} S1 | | S9-a, others-b/off | 11111011 | Measure the amplitude in the same way using pin 34. |
| Y _{in} S2 | S15-a, others-b/off | | | 11111010 | | | | |
| Y _{in} S3 | S21-a, others-b/off | | | 11111001 | | | | |
| Y _{in} 2 | S38-a, others-b/off | | | 0101**** | | | | |
| V _{in} E4 | S53-a, others-b/off | | | 0100**** | | | | |
| C _{in} S1 | S11-a, others-b/off | | | 11111011 | | | | |
| C _{in} S2 | S17-a, others-b/off | | | 11111010 | | | | |
| C _{in} S3 | S23-a, others-b/off | | | 11111001 | | | | |
| C _{in} 2 | S30-a, others-b/off | | | 0101**** | | | | |
| 16-(1) | S Video Frequency Response (Main) | | | Y _{in} S1 | S9-a, others-b/off | 11111011 | Measure the amplitude in the same way using pin 46. | |
| | | Y _{in} S2 | S15-a, others-b/off | 11111010 | | | | |
| | | Y _{in} S3 | S21-a, others-b/off | 11111001 | | | | |
| | | C _{in} S1 | S11-a, others-b/off | 11111011 | | | | |
| | | C _{in} S2 | S17-a, others-b/off | 11111010 | | | | |
| | | C _{in} S3 | S23-a, others-b/off | 11111001 | | | | |
| | | 16-(2) | S Video Frequency Response (Sub) | Y _{in} S1 | S9-a, others-b/off | 11111011 | | Measure the amplitude in the same way using pin 36. |
| | | | | Y _{in} S2 | S15-a, others-b/off | 11111010 | | |
| | | | | Y _{in} S3 | S21-a, others-b/off | 11111001 | | |
| | | | | C _{in} S1 | S11-a, others-b/off | 11111011 | | |
| C _{in} S2 | S17-a, others-b/off | | | 11111010 | | | | |
| C _{in} S3 | S23-a, others-b/off | | | 11111001 | | | | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} =9V, T _a =25±3°C) | | | MEASUREMENT METHOD |
|--------|---|--|------------------------------|----------|---|
| | | SW & VR MODE | | | |
| | | SW MODE | DATA 2 | DATA 3 | |
| 16-(3) | S Video Frequency Response (Clamp Off) (Main) | Y _{in} S1 | S9-a , S47-on, others-b/off | 11111011 | Measure the amplitude in the same way using pin 46. |
| | | Y _{in} S2 | S15-a , S47-on, others-b/off | 11111010 | |
| | | Y _{in} S3 | S21-a , S47-on, others-b/off | 11111001 | |
| | | C _{in} S1 | S11-a , S47-on, others-b/off | 11111011 | |
| | | C _{in} S2 | S17-a , S47-on, others-b/off | 11111010 | |
| | | C _{in} S3 | S23-a , S47-on, others-b/off | 11111001 | |
| 16-(4) | S Video Frequency Response (Clamp Off) (Sub) | Y _{in} S1 | S9-a , S37-on, others-b/off | 11111011 | Measure the amplitude in the same way using pin 36. |
| | | Y _{in} S2 | S15-a , S37-on, others-b/off | 11111010 | |
| | | Y _{in} S3 | S21-a , S37-on, others-b/off | 11111001 | |
| | | C _{in} S1 | S11-a , S37-on, others-b/off | 11111011 | |
| | | C _{in} S2 | S17-a , S37-on, others-b/off | 11111010 | |
| | | C _{in} S3 | S23-a , S37-on, others-b/off | 11111001 | |
| 17-(1) | B/W Mode Frequency Response (Main) | Y _{in} E2 | S2-a , others-b/off | 10100110 | Measure the amplitude in the same way using pin 44. |
| | | Y _{in} E1 | S5-a , others-b/off | 10100111 | |
| | | Y _{in} S1 | S7A-a , others-b/off | 10100011 | |
| | | Y _{in} S2 | S13A-a, others-b/off | 10100010 | |
| | | Y _{in} S3 | S19A-a, others-b/off | 10100001 | |
| | | Y _{in} E3 | S50-a , others-b/off | 10100101 | |
| | | Y _{in} E4 | S53-a , others-b/off | 10100100 | |
| | | Y _{in} E2 | S2-a , others-b/off | 10100110 | |
| | | Y _{in} E1 | S5-a , others-b/off | 10100111 | |
| | | Y _{in} S1 | S7A-a , others-b/off | 10100011 | |
| | | Y _{in} S2 | S13A-a, others-b/off | 10100010 | |
| | | Y _{in} S3 | S19A-a, others-b/off | 10100001 | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, Ta = 25 ± 3°C) | | | |
|--------|---|--|---------------------------|---|--|
| | | SW & VR MODE | | | |
| | | SW MODE | DATA 3 | MEASUREMENT METHOD | |
| 17-(2) | B / W Mode Frequency Response (Sub) | V _{in} E2 | 10100110 | Measure the amplitude in the same way using pin 34. | |
| | | V _{in} E1 | 10100111 | | |
| | | V _{in} S1 | 10100011 | | |
| | | V _{in} S2 | 10100010 | | |
| | | V _{in} S3 | 10100001 | | |
| | | V _{in} E3 | 10100101 | | |
| | | V _{in} E4 | 10100100 | | |
| | | V _{in} E2 | 10100110 | | Measure the amplitude in the same way using pin 32. |
| | | V _{in} E1 | 10100111 | | |
| | | V _{in} S1 | 10100011 | | |
| | V _{in} S2 | 10100010 | | | |
| | V _{in} S3 | 10100001 | | | |
| | V _{in} E3 | 10100101 | | | |
| | V _{in} E4 | 10100100 | | | |
| | 18 | Clamp Level | V _{out} 1 Output | DATA 2 ***0110 | (1) Measure the voltage V _{CO} on pin 46 during no-signal intervals. (2) Input a V ₁ NTSC signal. (3) Observe the waveform on pin 46 and find the V _{CO} level from the sync tip in percentage assuming that the SYNC signal level = 100% |
| | | | V _{out} 2 Output | DATA 3 ***0110 | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | MEASUREMENT METHOD | |
|-------|-----------------------|--|--------|--|--|
| | | SW & VR MODE | | | |
| | | SW MODE | DATA 2 | | |
| 19 | Audio L Dynamic Range | LinE2 | DATA 2 | (1) V ₂ 1kHz, amplitude-variable input. (2) For each, measure the amplitude of V ₁ at which the waveform on pin 45 is distorted. (Data 1 D ₀₀ = 0 : mute off) | |
| | | LinE1 | DATA 2 | | |
| | | LinS1 | DATA 2 | | |
| | | LinS2 | DATA 2 | | |
| | | LinS3 | DATA 2 | | |
| | | LinE3 | DATA 2 | | |
| | | LinE4 | DATA 2 | | |
| | | LinE2 | DATA 3 | | Measure the amplitude in the same way using pin 35. (Data 1 D ₀₁ = 0 : mute off) |
| | | LinE1 | DATA 3 | | |
| | | LinS1 | DATA 3 | | |
| LinS2 | DATA 3 | | | | |
| LinS3 | DATA 3 | | | | |
| LinE3 | DATA 3 | | | | |
| LinE4 | DATA 3 | | | | |
| LinE1 | DATA 2, 3 | Measure the amplitude in the same way using pin 41. (Data 1 D ₀₂ = 0 : mute off) | | | |
| | DATA 2, 3 | | | | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | | |
|--------------------|--------------------------|--|---------|--|--|
| | | SW & VR MODE | | | |
| | | SW MODE | DATA 2 | MEASUREMENT METHOD | |
| 19 | Audio R Dynamic Range | R _{in} E2 | ***0110 | Measure the amplitude in the same way using pin 43. (Data 1 D ₀₀ = 0 : mute off) | |
| | | R _{in} E1 | ***0111 | | |
| | | R _{in} S1 | ***0011 | | |
| | | R _{in} S2 | ***0010 | | |
| | | R _{in} S3 | ***0001 | | |
| | | R _{in} E3 | ***0101 | | |
| | | R _{in} E4 | ***0100 | | |
| | | R _{in} E2 | DATA 3 | | Measure the amplitude in the same way using pin 33. (Data 1 D ₀₁ = 0 : mute off) |
| | | R _{in} E1 | ***0110 | | |
| | | R _{in} S1 | ***0111 | | |
| R _{in} S2 | ***0011 | | | | |
| R _{in} S3 | ***0010 | | | | |
| R _{in} E3 | ***0001 | | | | |
| R _{in} E4 | ***0101 | | | | |
| R _{in} E4 | ***0100 | | | | |
| R _{in} E1 | DATA 2, 3 | Measure the amplitude in the same way using pin 39. (Data 1 D ₀₂ = 0 : mute off) | | | |
| R _{in} E1 | ***** | | | | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | |
|-----------------|-----------------------|--|--|---|
| | | SW & VR MODE | | MEASUREMENT METHOD |
| | | SW MODE | DATA 2 | |
| 20 Audio L Gain | LinE2 | S1-a , others-b / off | ****0110 | (1) V ₂ 1kHz, 1V _{pp} input. (2) For each, measure the output amplitude on pin 45 to find the gain. (Data 1 D00 = 0 : mute off) |
| | LinE1 | S4-a , others-b / off | ****0111 | |
| | LinS1 | S8-a , others-b / off | ****0011 | |
| | LinS2 | S14-a , others-b / off | ****0010 | |
| | LinS3 | S20-a , others-b / off | ****0001 | |
| | LinE3 | S51-a , others-b / off | ****0101 | |
| | LinE4 | S54A-a , others-b / off | ****0100 | |
| | LinE2 | S1-a , others-b / off | DATA 3 ****0110 | |
| | LinE1 | S4-a , others-b / off | ****0111 | |
| | LinS1 | S8-a , others-b / off | ****0011 | |
| | LinS2 | S14-a , others-b / off | ****0010 | |
| | LinS3 | S20-a , others-b / off | ****0001 | |
| | LinE3 | S51-a , others-b / off | ****0101 | |
| | LinE4 | S54A-a , others-b / off | ****0100 | |
| LinE1 | S4-a , others-b / off | DATA 2, 3 ***** | Find the gain in the same way using pin 41. (Data 1 D02 = 0 : mute off) | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | | |
|--------------------|-----------------------------------|--|---------|--|--|
| | | SW & VR MODE | | MEASUREMENT METHOD | |
| | | SW MODE | DATA 2 | | |
| 20 Audio R Gain | R _{in} E2 | S ₃ -a , others-b /off | ***0110 | Find the gain in the same way using pin 43. (Data 1 D ₀₀ = 0 : mute off) | |
| | R _{in} E1 | S ₆ -a , others-b /off | ***0111 | | |
| | R _{in} S1 | S ₁₀ -a , others-b /off | ***0011 | | |
| | R _{in} S2 | S ₁₆ -a , others-b /off | ***0010 | | |
| | R _{in} S3 | S ₂₂ -a , others-b /off | ***0001 | | |
| | R _{in} E3 | S ₄₉ -a , others-b /off | ***0101 | | |
| | R _{in} E4 | S _{52A} -a , others-b /off | ***0100 | | |
| | R _{in} E2 | S ₃ -a , others-b /off | DATA 3 | | Find the gain in the same way using pin 33. (Data 1 D ₀₁ = 0 : mute off) |
| | R _{in} E1 | S ₆ -a , others-b /off | ***0110 | | |
| | R _{in} S1 | S ₁₀ -a , others-b /off | ***0111 | | |
| | R _{in} S2 | S ₁₆ -a , others-b /off | ***0011 | | |
| | R _{in} S3 | S ₂₂ -a , others-b /off | ***0010 | DATA 2, 3 | |
| | R _{in} E3 | S ₄₉ -a , others-b /off | ***0001 | | |
| | R _{in} E4 | S _{52A} -a , others-b /off | ***0101 | ***0100 | |
| R _{in} E1 | S ₆ -a , others-b /off | DATA 2, 3 | ***** | Find the gain in the same way using pin 39. (Data 1 D ₀₂ = 0 : mute off) | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | | |
|-------|----------------------------------|--|--|---|--|
| | | SW & VR MODE | | MEASUREMENT METHOD | |
| | | SW MODE | DATA 2 | | |
| 21 | Audio L Frequency Response | LinE2 S1-a , others-b / off | DATA 2 ****0110 | (1) V ₂ frequency-variable, 1V _{p-p} input. (2) Measure the output amplitude on pin 45 and find the frequency equivalent to -3dB. (Data 1 D00 = 0 : mute off) | |
| | | LinE1 S4-a , others-b / off | ****0111 | | |
| | | LinS1 S8-a , others-b / off | ****0011 | | |
| | | LinS2 S14-a , others-b / off | ****0010 | | |
| | | LinS3 S20-a , others-b / off | ****0001 | | |
| | | LinE3 S51-a , others-b / off | ****0101 | | |
| | | LinE4 S54A-a , others-b / off | ****0100 | | |
| | | LinE2 S1-a , others-b / off | DATA 3 ****0110 | | Measure the amplitude in the same way using pin 35. (Data 1 D01 = 0 : mute off) |
| | | LinE1 S4-a , others-b / off | ****0111 | | |
| | | LinS1 S8-a , others-b / off | ****0011 | | |
| | LinS2 S14-a , others-b / off | ****0010 | | | |
| | LinS3 S20-a , others-b / off | ****0001 | | | |
| | LinE3 S51-a , others-b / off | ****0101 | | | |
| | LinE4 S54A-a , others-b / off | ****0100 | | | |
| LinE1 | S4-a , others-b / off | DATA 2, 3 ***** | Measure the amplitude in the same way using pin 41. (Data 1 D02 = 0 : mute off) | | |
| | | ***** | | | |
| | | ***** | | | |
| | | ***** | | | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | | | |
|--------------------|------------------------------------|--|--|--------------------|--|--|
| | | SW & VR MODE | | MEASUREMENT METHOD | | |
| | | SW MODE | DATA 2 | | | |
| 21 | Audio R Frequency Response | R _{in} E2 | S ₃ -a , others-b / off | ****0110 | Measure the amplitude in the same way using pin 43. (Data 1 D ₀₀ = 0 : mute off) | |
| | | R _{in} E1 | S ₆ -a , others-b / off | ****0111 | | |
| | | R _{in} S1 | S ₁₀ -a , others-b / off | ****0011 | | |
| | | R _{in} S2 | S ₁₆ -a , others-b / off | ****0010 | | |
| | | R _{in} S3 | S ₂₂ -a , others-b / off | ****0001 | | |
| | | R _{in} E3 | S ₄₉ -a , others-b / off | ****0101 | | |
| | | R _{in} E4 | S _{52A} -a, others-b / off | ****0100 | | |
| | | R _{in} E2 | S ₃ -a , others-b / off | DATA 3 | | Measure the amplitude in the same way using pin 33. (Data 1 D ₀₁ = 0 : mute off) |
| | | R _{in} E1 | S ₆ -a , others-b / off | ****0110 | | |
| | | R _{in} S1 | S ₁₀ -a , others-b / off | ****0111 | | |
| | | R _{in} S2 | S ₁₆ -a , others-b / off | ****0011 | | |
| | | R _{in} S3 | S ₂₂ -a , others-b / off | ****0010 | | |
| | | R _{in} E3 | S ₄₉ -a , others-b / off | ****0001 | | |
| | | R _{in} E4 | S _{52A} -a, others-b / off | ****0101 | | |
| R _{in} E1 | S ₄ -a , others-b / off | DATA 2, 3 | Measure the amplitude in the same way using pin 39. (Data 1 D ₀₂ = 0 : mute off) | | | |
| | | ***** | | | | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | MEASUREMENT METHOD | | |
|--------------------|--|--|--|--------------------|--|---|
| | | SW & VR MODE | | | | |
| | | SW MODE | DATA 2 | | | |
| 22 | L Switch Crosstalk | L _{in} E2 | All-b/off except those specified on the left | ****0110 | (1) V ₂ 1kHz, 1V _{p-p} input. (2) While sequentially switching S ₁ , S ₃ , S ₄ , S ₆ , S ₁₀ , S ₁₄ , S ₁₆ , S ₂₀ , S ₂₂ , S ₄₉ , S ₅₁ , S _{52A} , and S _{54A} to 'a', measure the maximum level of crosstalk to pin 45 and find its ratio to selected output. (Data 1 D ₀₀ = 0 : mute off) | |
| | | L _{in} E1 | All-b/off except those specified on the left | ****0111 | | |
| | | L _{in} S1 | All-b/off except those specified on the left | ****0011 | | |
| | | L _{in} S2 | All-b/off except those specified on the left | ****0010 | | |
| | | L _{in} S3 | All-b/off except those specified on the left | ****0001 | | |
| | | L _{in} E3 | All-b/off except those specified on the left | ****0101 | | |
| | | L _{in} E4 | All-b/off except those specified on the left | ****0100 | | |
| | | L _{in} E2 | All-b/off except those specified on the left | DATA 3 | | Measure the maximum level of crosstalk in the same way using pin 35. (Data 1 D ₀₁ = 0 : mute off) |
| | | L _{in} E1 | All-b/off except those specified on the left | ****0110 | | |
| | | L _{in} S1 | All-b/off except those specified on the left | ****0111 | | |
| L _{in} S2 | All-b/off except those specified on the left | ****0011 | | | | |
| L _{in} S3 | All-b/off except those specified on the left | ****0010 | ****0001 | | | |
| L _{in} E3 | All-b/off except those specified on the left | ****0101 | ****0101 | | | |
| L _{in} E4 | All-b/off except those specified on the left | ****0100 | ****0100 | | | |


| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | MEASUREMENT METHOD | |
|------|--------------------|--|---|--------------------|--|
| | | SW & VR MODE | | | |
| | | SW MODE | DATA 2 | | |
| 22 | R Switch Crosstalk | R _{in} E2 | AlHb/off except those specified on the left | ****0110 | Measure the maximum level of crosstalk in the same way using pin 43. (Data 1 D00 = 0 : mute off) |
| | | R _{in} E1 | AlHb/off except those specified on the left | ****0111 | |
| | | R _{in} S1 | AlHb/off except those specified on the left | ****0011 | |
| | | R _{in} S2 | AlHb/off except those specified on the left | ****0010 | |
| | | R _{in} S3 | AlHb/off except those specified on the left | ****0001 | |
| | | R _{in} E3 | AlHb/off except those specified on the left | ****0101 | |
| | | R _{in} E4 | AlHb/off except those specified on the left | ****0100 | |
| | | | DATA 3 | | |
| | | R _{in} E2 | AlHb/off except those specified on the left | ****0110 | Measure the maximum level of crosstalk in the same way using pin 33. (Data 1 D01 = 0 : mute off) |
| | | R _{in} E1 | AlHb/off except those specified on the left | ****0111 | |
| | R _{in} S1 | AlHb/off except those specified on the left | ****0011 | | |
| | R _{in} S2 | AlHb/off except those specified on the left | ****0010 | | |
| | | R _{in} S3 | AlHb/off except those specified on the left | ****0001 | |
| | | R _{in} E3 | AlHb/off except those specified on the left | ****0101 | |
| | | R _{in} E4 | AlHb/off except those specified on the left | ****0100 | |
| | | DATA 2, 3 | | | |
| | TV-L Crosstalk | | AlHb/off except those specified on the left | ***** | Measure the maximum level of crosstalk in the same way using pin 41. (Data 1 D02 = 0 : mute off) |
| | TV-R Crosstalk | | AlHb/off except those specified on the left | ***** | Measure the maximum level of crosstalk in the same way using pin 39. (Data 1 D02 = 0 : mute off) |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | |
|------|---------------------------|--|--|
| | | SW & VR MODE | MEASUREMENT METHOD |
| 23 | L Switch Mute Attenuation | SW MODE | (1) V ₂ 1kHz, 1V _{p-p} input. (2) Mute on (data 1 D00 = 1) and while sequentially switching S1, S3, S4, S6, S8, S10, S14, S16, S20, S22, S49, S51, S52A, and S54A to 'a', measure the maximum level of crosstalk to pin 45 and find its ratio to selected output. |
| | | DATA 2, 3 | ***** |
| | R Switch Mute Attenuation | SW MODE | Measure the maximum level of crosstalk in the same way using pin 35. (Data 1 D01 = 1 : mute on) |
| | | DATA 2, 3 | ***** |
| | | SW MODE | Measure the maximum level of crosstalk in the same way using pin 43. (Data 1 D00 = 1 : mute on) |
| | | DATA 2, 3 | ***** |
| | | SW MODE | Measure the maximum level of crosstalk in the same way using pin 33. (Data 1 D01 = 1 : mute on) |
| | | DATA 2, 3 | ***** |


| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | |
|--------------------------------|--------------------|--|--|--|
| | | SW & VR MODE | | MEASUREMENT METHOD |
| | | SW MODE | DATA 2, 3 | |
| 24 Mode Switching Offset | L _{in} E2 | All-b/off | ****0110 | (1) No-signal input. (2) Measure voltage fluctuations to find the maximum value in all input modes of data 2 for pin 45, and in all input modes of data 3 for pin 35. |
| | L _{in} E1 | All-b/off | ****0111 | |
| | L _{in} S1 | All-b/off | ****0011 | |
| | L _{in} S2 | All-b/off | ****0010 | |
| | L _{in} S3 | All-b/off | ****0001 | |
| | L _{in} E3 | All-b/off | ****0101 | |
| | L _{in} E4 | All-b/off | ****0100 | |
| | R _{in} E2 | All-b/off | ****0110 | |
| | R _{in} E1 | All-b/off | ****0111 | Find the maximum value in the same way using pin 43 (data 2) and pin 33 (data 3). |
| | R _{in} S1 | All-b/off | ****0011 | |
| | R _{in} S2 | All-b/off | ****0010 | |
| | R _{in} S3 | All-b/off | ****0001 | |
| | R _{in} E3 | All-b/off | ****0101 | |
| | R _{in} E4 | All-b/off | ****0100 | |
| L _{in} E1 | All-b/off | ***** | Find the maximum value in the same way using pin 41. | |
| R _{in} E1 | All-b/off | ***** | Find the maximum value in the same way using pin 39. | |

| NOTE | ITEM | MEASURING CONDITIONS (UNLESS OTHERWISE SPECIFIED, V _{CC} = 9V, T _a = 25 ± 3°C) | | MEASUREMENT METHOD |
|------|--------------------------------|--|-----------|---|
| | | SW & VR MODE | DATA 2, 3 | |
| 25 | S Input Discriminating Voltage | S ₉ -a, S _{7B} -on, others-b / off | ****0011 | (1) V _i 1kHz, 1V _{pp} input. (2) While gradually lowering the V ₃ voltage, find the voltage where the output mode changes to the S mode (i.e., the voltage at which a waveform appears on pin 46). (Data 1 D ₀₀ , D ₀₁ , D ₀₂ = 0 : mute off) |
| | | | ****0010 | |
| | | | ****0001 | |
| 26 | I Input Discriminating Voltage | S ₂₈ -a , others-b / off | ***** | While gradually lowering the V ₃ voltage, find the voltage at which the data of B ₃₄ , B ₃₅ , B ₃₆ , and B ₃₇ changes from 0 to 1, respectively. (Data 1 D ₀₃ , D ₀₄ = 1 : I MODE) |
| | | | ***** | |
| | | | ***** | |
| | | | ***** | |
| 27 | External Mute-ON Voltage | S ₄ , S ₂₅ -a, others-b / off | ***** | While gradually raising the V ₃ voltage, find the voltage at which mute is turned on. |
| | | | ***** | |
| 28 | O Output Low Level Voltage | All-b / off | ***** | Find the voltage on pins 28, 29, and 31 when the data D ₀₃ , D ₀₄ , and D ₀₅ are 0, respectively. |
| | | | ***** | |
| | | | ***** | |

TEST CIRCUIT 1
DC characteristics

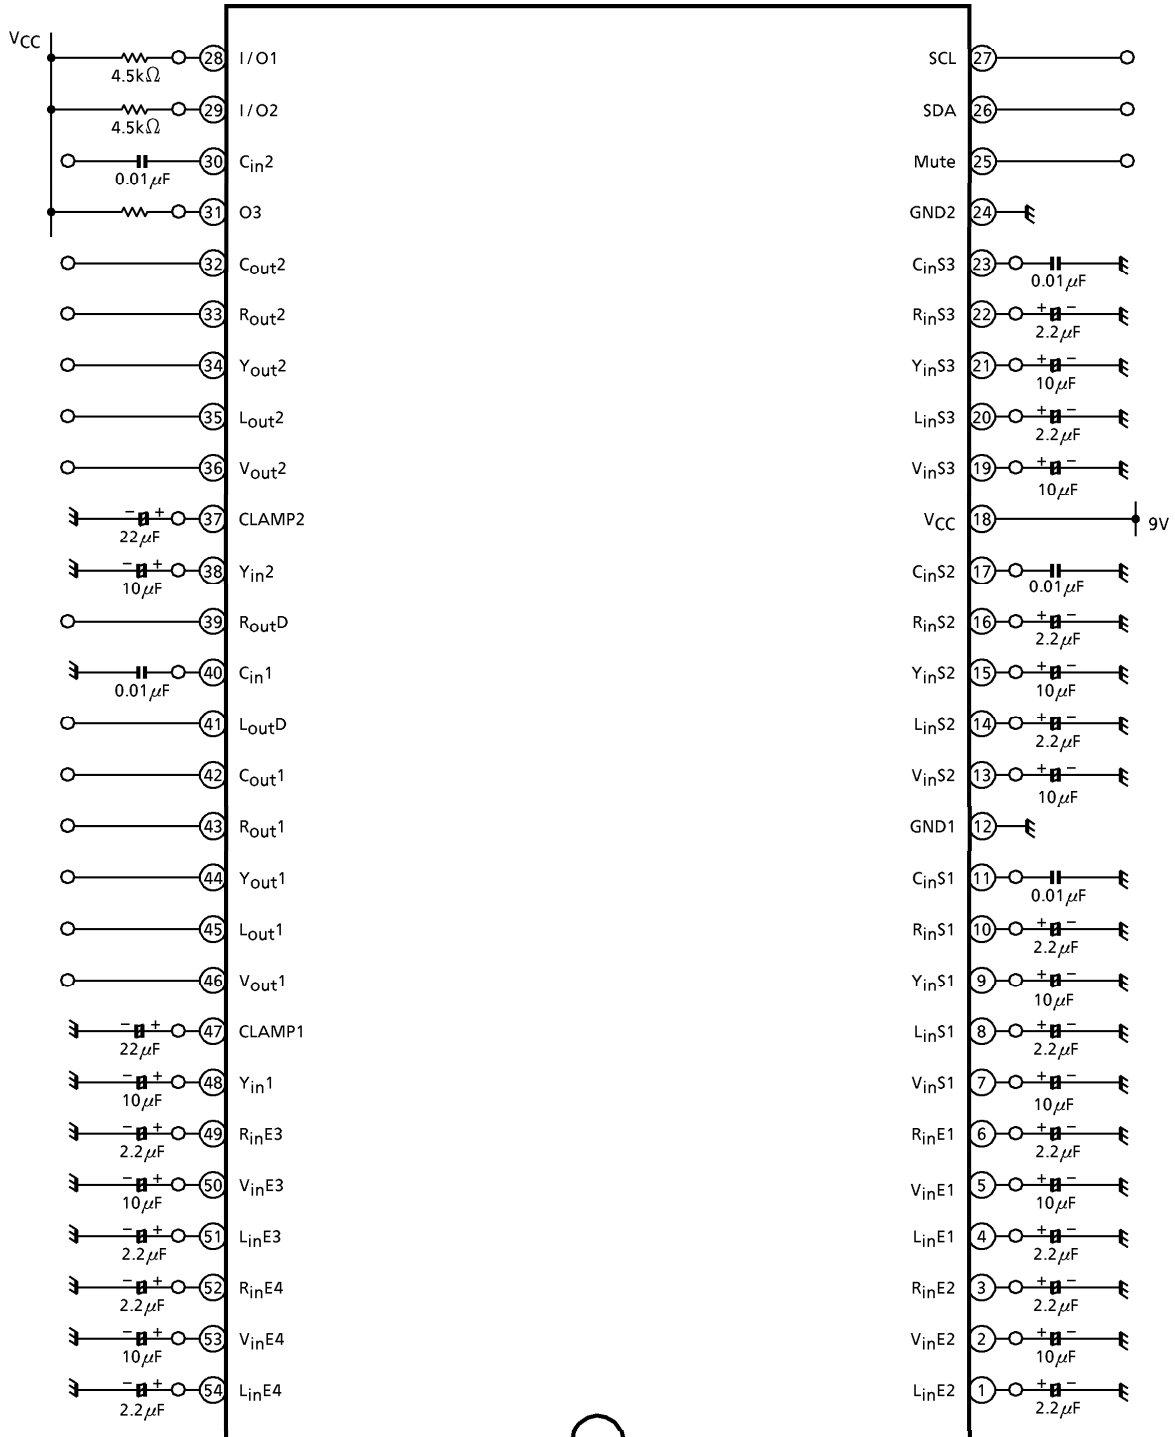


TEST CIRCUIT 2
AC characteristics

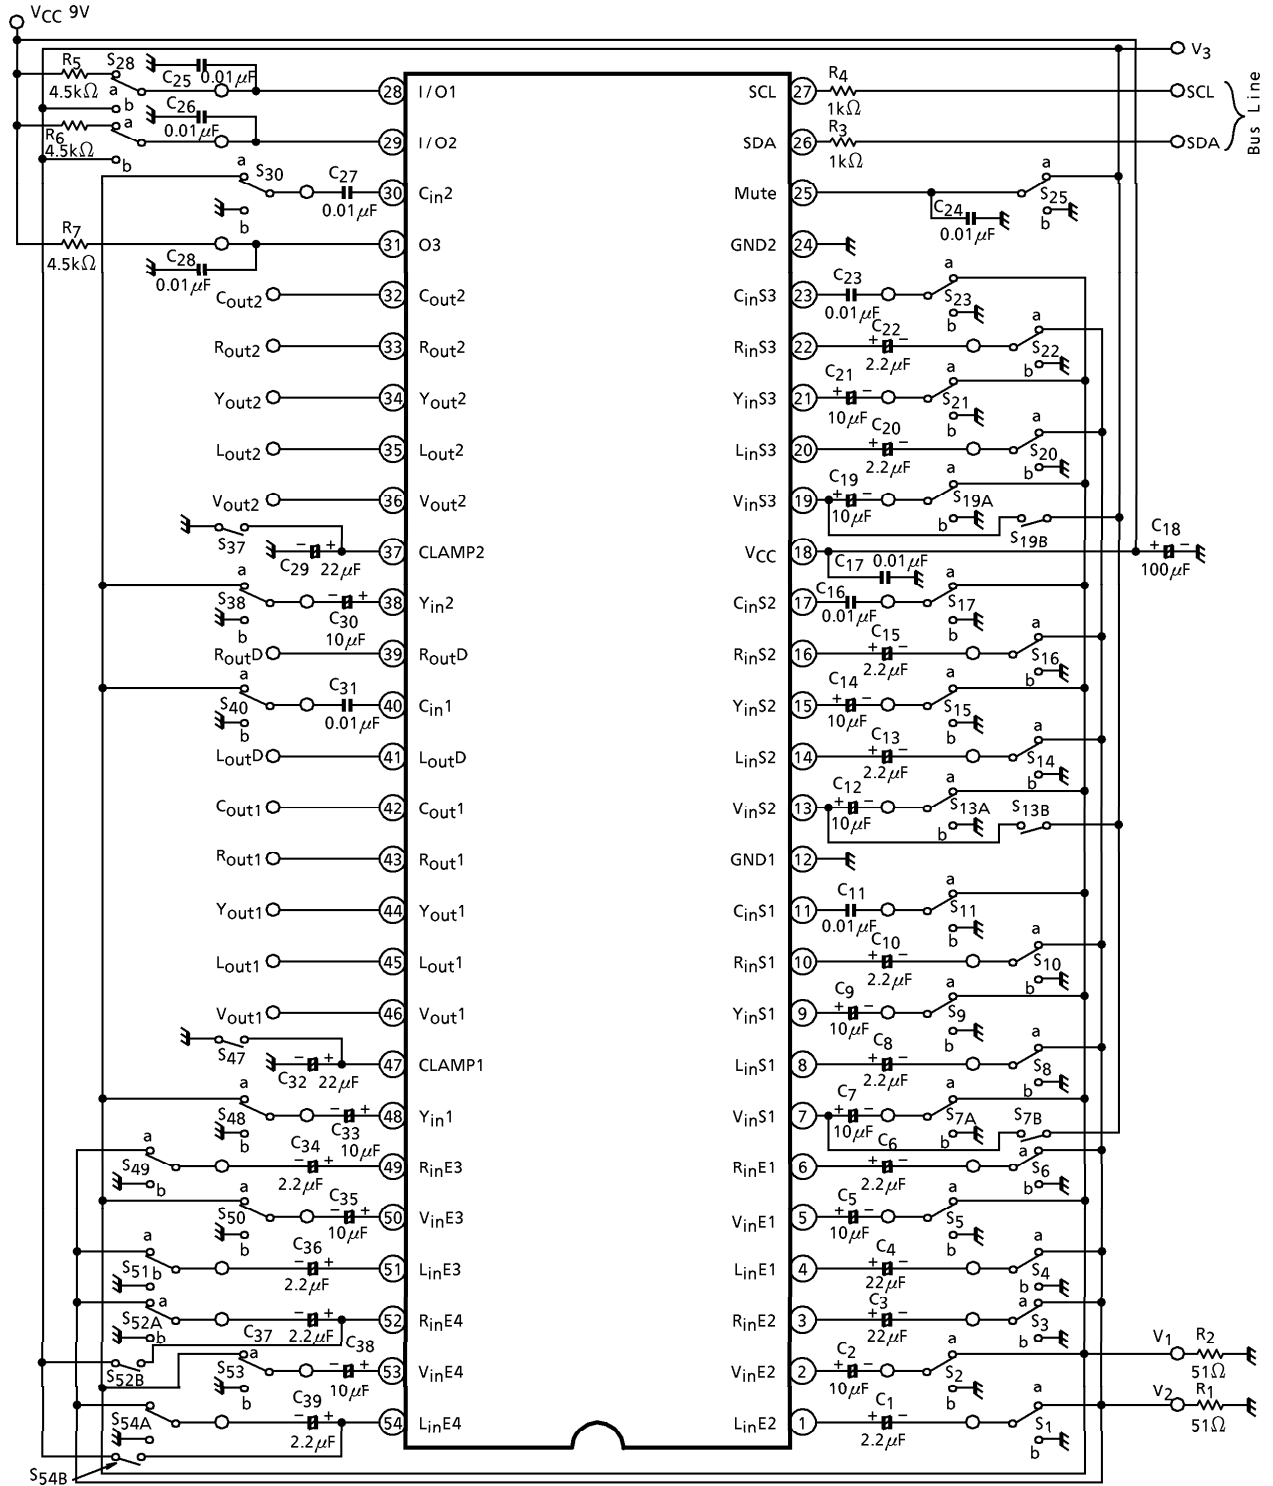

OUTLINE DRAWING
SDIP54-P-600-1.78

Unit : mm

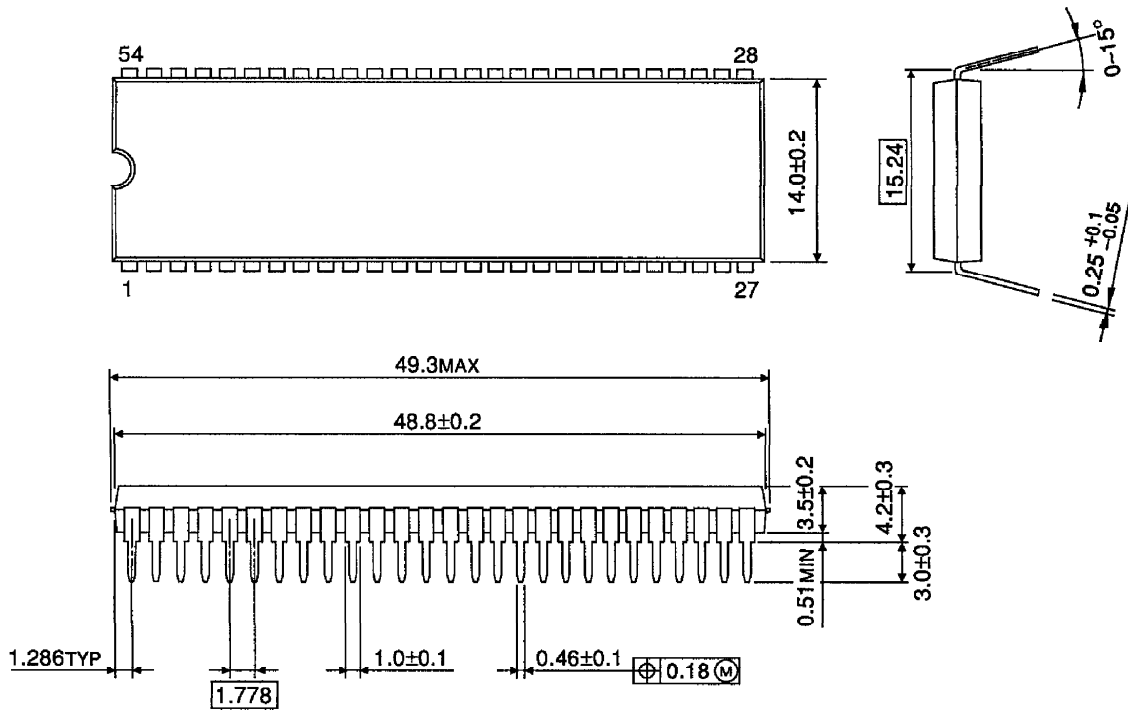

Weight : 1.0g (Typ.)