


125 MHz PIN Plus Preamplified Analog Receiver

HFD3216-003 see HFD3225-003

- Industry standard ST* fiber connector
- High-speed operation, Rise/Fall times are 3.5 ns typical
- Low pulse width distortion over a wide range of inputs because of 23 dB typical dynamic range
- Wide variety of cable options, operates with 50/125, 62.5/125, and 100/140 μ m cables
- Popular Fiber DIP package
- Wide operating temperature range -40 to +85°C
- Conductive plastic ST* barrel

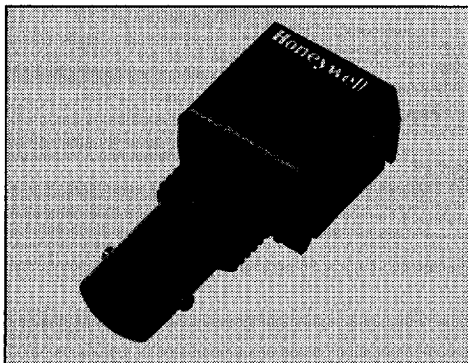

FIBER104.TIF

The receiver output is a proportional analog voltage, providing cost-effective design flexibility. The user can tailor the circuit design to the particular application, using inexpensive external components to perform the conversion to the needed logic levels. This allows for an optimized design, making maximum use of the power budget for a given data rate/transmission distance configuration.

Figure 1: Dimensions of the 375-32 UNEF-2A connector. The figure includes three views: a side view, a top view, and a front view. The side view shows a length of .500, a height of .400, and a diameter of .275 DIA. The top view shows a width of .200 and a height of .13. The front view shows a length of 1.095, a height of .500, and a diameter of .385. The front view also shows a pin 1 identifier and a .150 dimension.

FIBER201.DIM

HFD3216-002

1. NC
2. Output
3. V_{EE}
4. NC
5. NC
6. V_{CC}
7. V_{EE}
8. NC

HFD3216-003

1. NC
2. Inv Out
3. V_{CC}
4. NC
5. NC
6. Non-Inv Out
7. V_{EE}
8. NC

4551830 0022033 8T4
honeywell

HFD3216

125 MHz PIN Plus Preamplified Analog Receiver

ELECTRO-OPTICAL CHARACTERISTICS ($V_{EE} = -5.2$ V, $V_{CC} = 0$ V (GROUND) $T_C = 25^\circ\text{C}$ unless otherwise stated)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Responsivity ⁽¹⁾ $T = 25^\circ\text{C}$	R	5.3	7.5	9.6	mV/ μW	$f = 50\text{ MHz}$, $P_{IN} = 100\mu\text{W}$ peak, $\lambda = 850$ nm, 62.5 μm core fiber
	HFD3216-002	6	8	11		
Over Temp. Range $-40 < T < +85^\circ\text{C}$	HFD3216-002	4.5		11.5		
	HFD3216-003	4.5		13		
Input Power	P_{IN} (peak)	0.8		175	μW	$f = 50$ MHz, $\lambda = 850$ nm PWD = 2.5 ns $P_{IN} \leq 0.1 \mu\text{W}$
DC Output Voltage ⁽²⁾	V_{OOC}	-4.0	-3.65	-3.3	V	$P_{IN} \leq 0.1 \mu\text{W}$
	HFD3216-002	-2.6	-2.4	-2.2		
	HFD3216-003					
Power Supply Current	I_{CC}		9	15	mA	$R_{LOAD} = 0$
	HFD3216-002		11	15		
	HFD3216-003					
Rise/Fall Time $T = 25^\circ\text{C}$	t_R/t_F		3.6	4.5	ns	$f = 10\text{ MHz}$, $P_{IN} = 150\mu\text{W}$ peak, $\lambda = 850$ nm
	HFD3216-002		2.5	4.5		
Over Temp. Range $-40 < T < +85^\circ\text{C}$	HFD3216-002		3.6	6.3		
	HFD3216-003	1.0		5.5		
Pulse Width Distortion	PWD		0.2	1.5	ns	$f = 50\text{ MHz}$, $P_{IN} = 150\mu\text{W}$ peak, $\lambda = 850$ nm
Bandwidth	BW		125		MHz	$\lambda = 850$ nm, $R = 0.707 R$ max.
	HFD3216-002		125			
	HFD3216-003					
RMS Noise Output Voltage	V_{NO}		0.52	0.58	mV	$P_{IN} = 0 \mu\text{W}$, 75 MHz, 3 pole Bessel filter on output
	HFD3216-002		0.46	0.60		
	HFD3216-003					
Output PSRR		17	20		dB	$f = 10$ MHz
	HFD3216-002		21		dB	$f = 10$ MHz
	HFD3216-003					
Output Overshoot			10	13	%	$P_{IN} = 10 \mu\text{W}$
	HFD3216-002			6	%	$P_{IN} = 10 \mu\text{W}$
	HFD3216-003					
Output Resistance			20		Ω	$f = 50$ MHz
RMS Input Noise Power	P_{NI}		74	79	nW	$P_{IN} = 0 \mu\text{W}$, 75 MHz, 3 pole Bessel filter on output
	HFD3216-002		60	79		
	HFD3216-003					

Notes

- Photodiode has 600 μm diameter microlens for optical coupling.
- Quiescent output voltage (V_{OOC}) is -2.4 V (differential) or -3.65 V (single ended) typical. Dynamic output voltage swing is below the quiescent output voltage ($V_O = V_{OOC} + R \times P_{IN}$).
- Graphs shown are based on -003 product. The -002 product will shift accordingly based on typical values in Electro-Optical Characteristics table.

4551830 0022034 730

Honeywell

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

HFD3216

125 MHz PIN Plus Preamplified Analog Receiver

ABSOLUTE MAXIMUM RATINGS

(T_{case} = 25°C unless otherwise noted)

Storage temperature	-55 to +85°C
Operating temperature	-40 to +85°C
Lead solder temperature	260°C for 10 s

Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

RECOMMENDED OPERATING CONDITIONS

Operating temperature	-40 to +85°C
Supply voltage (V _{CC} - V _{EE})	-0.5 to -6.0 V
Optical signal input	1.0 to 125 μW

ORDER GUIDE

Description	Catalog Listing
125 MHz PIN plus preamplifier single-ended output analog receiver	HFD3216-002
125 MHz PIN plus preamplified differential output analog receiver	HFD3216-003

CAUTION

The inherent design of this component causes it to be sensitive to electrostatic discharge (ESD). To prevent ESD-induced damage and/or degradation to equipment, take normal ESD precautions when handling this product.




FIBER INTERFACE

Honeywell detectors are designed to interface with multimode fibers with sizes (core/cladding diameters) ranging from 50/125 to 200/230 microns. Honeywell performs final tests using 62.5/125 micron core fiber. The fiber chosen by the end user will depend upon a number of application issues (distance, link budget, cable attenuation, splice attenuation, and safety margin). The 50/125 and 62.5/125 micron fibers have the advantages of high bandwidth and low cost, making them ideal for higher bandwidth installations. The use of 100/140 and 200/230 micron core fibers results in greater power being coupled by the transmitter, making it easier to splice or connect in bulkhead areas. Optical cables can be purchased from a number of sources.

CIRCUIT DIAGRAM - Single Ended Output HFD3216-002


FIBER034.SCH

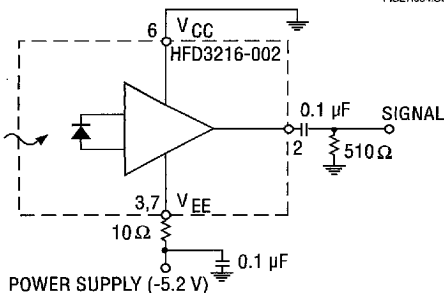

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

CIRCUIT DIAGRAM - Differential Output HFD3216-003

FIBER035.SCH

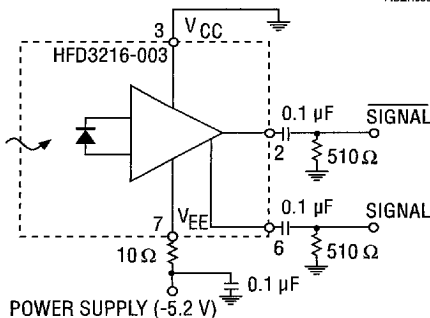

Honeywell

HFD3216

125 MHz PIN Plus Preamplified Analog Receiver

Fig. 1 Spectral Responsivity

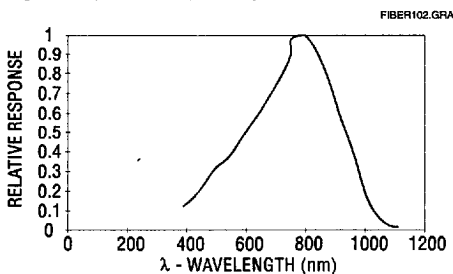


Fig. 2 Responsivity vs Temperature

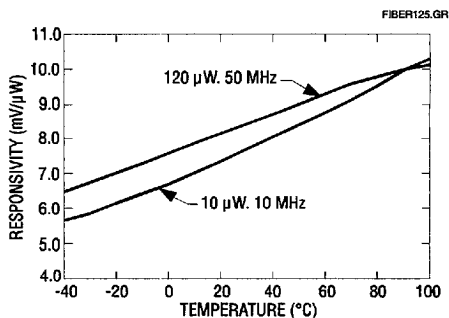


Fig. 3 RMS Noise Voltage vs Temperature

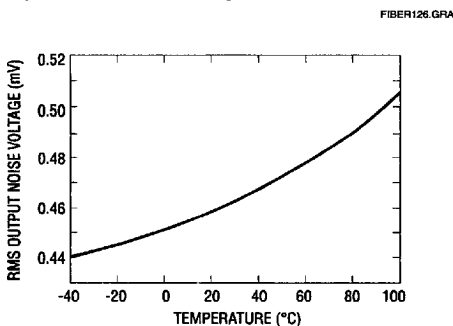


Fig. 4 RMS Input Referred Noise vs Temperature

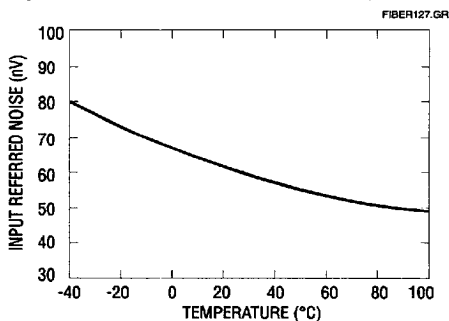


Fig. 5 DC Output Voltage vs Temperature

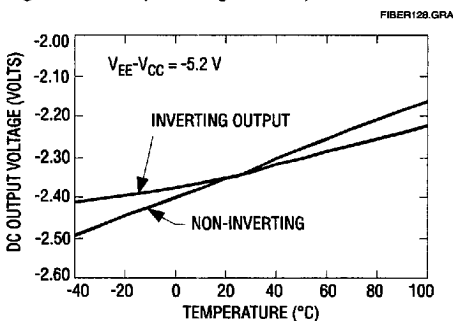


Fig. 6 Pulse Width Distortion vs Optical Input Power

