

XC6401 Series

Dual LDO Regulators, Low ESR Cap. Compatible

November 7, 2003 Ver. 4

Preliminary

■ Low Power Consumption	: 25 μ A (TYP)
■ Dropout Voltage	: 30mV @ 30mA
	: 100mV @ 100mA
■ Output Voltage Range	: 0.8 V to 5.0 V
■ Output Current	: More than 150 mA (300mA limit)
■ High Ripple Rejection Rate	: 70 dB @ 1kHz
■ Low Output Noise	
■ Low ESR capacitor compatible	

■ APPLICATIONS

- Mobile phones (PDC, GSM, CDMA, IMT2000 etc.)
- Cordless phones and radio communication equipment
- Portable games
- Cameras, Video recorders
- Portable AV equipment
- PDAs

■ GENERAL DESCRIPTION

The XC6401 series are highly accurate, Dual, low noise, CMOS LDO voltage regulators. Performance features of the series includes low output noise, high ripple rejection ratio, low dropout and very fast turn-on times.

The XC6401 includes a reference voltage source, error amplifiers, driver transistors, current limiters and phase compensators internally. The XC6401's current limiters' foldback circuit also operates as a short protect for the output current limiter.

The output voltage for each regulator is set independently by laser trimming. Voltages are selectable in 50mV steps within a range of 0.8V to 5.0V. The XC6401 series is also fully compatible with low ESR ceramic capacitors, reducing cost and improving output stability. This high level of output stability is maintained even during frequent load fluctuations, due to the excellent transient response performance and high PSRR achieved across a broad range of frequencies.


The EN function allows the output of each regulator to be turned off independently, resulting in greatly reduced power consumption.

The XC6401 series is available in the SOT-26W or USP-6B 'chip-scale' package.

■ FEATURES

Maximum Output Current	: 150mA or more (300mA limit)
Dropout Voltage	: 100mV ($I_{OUT}=100mA$)
Operating Voltage Range	: 1.5V ~ 6.0V
Output Voltage Range	: 0.8V ~ 5.0V (50mV Step)
Highly Accurate	: $\pm 2\%$ ($V_{OUT} > 1.5V$)
	: $\pm 30mV$ ($V_{OUT} \leq 1.5V$)
Low Power Consumption	: 25 mA (TYP.)
Standby Current	: Less than 0.1 μ A (TYP.)
High Ripple Rejection	: 70dB (1kHz)
Operating Temperature Range	: -40°C ~ +85°C
Low ESR Capacitor Compatible	: Ceramic capacitor
Ultra Small Packages	: SOT-26W USP-6B


■ TYPICAL APPLICATION CIRCUITS

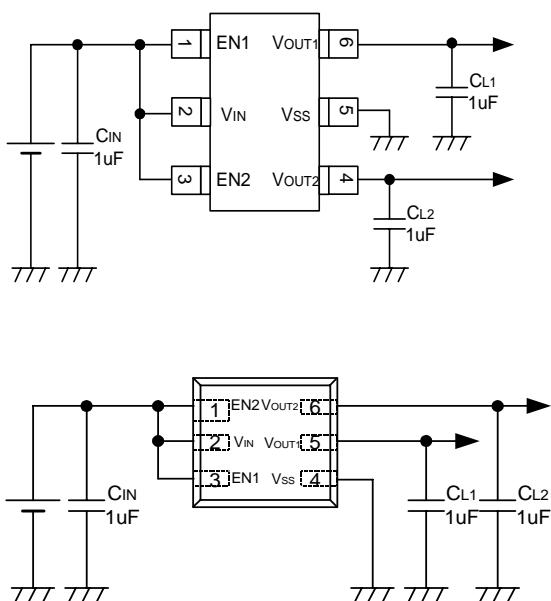

■ TYPICAL PERFORMANCE CHARACTERISTICS

○ Cross Talk

XC6401 (VR1:3.0V, VR2:2.85V)


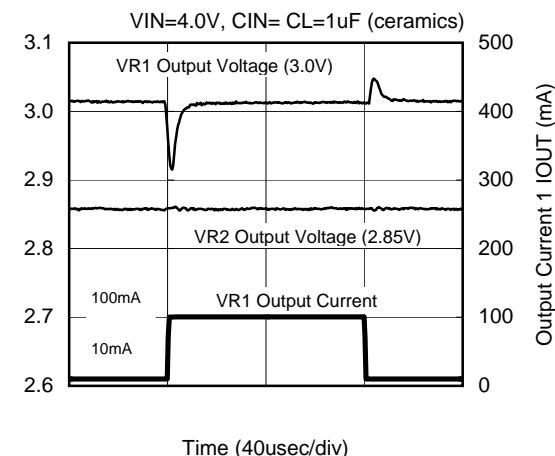


XC6401 Series

Dual LDO Regulators, Low ESR Cap. Compatible

Preliminary

■ PIN CONFIGURATION

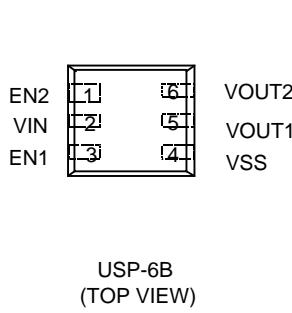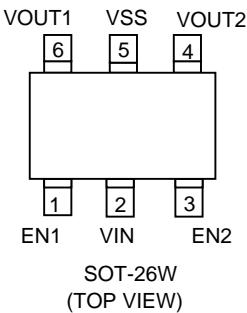

■ PIN ASSIGNMENT

PIN NUMBER		PIN NAME	FUNCTION
SOT-26W	USP-6B		
1	3	EN1	ON/OFF Control 1
2	2	VIN	Power Input
3	1	EN2	ON/OFF Control 2
4	6	VOUT2	Output 2
5	4	VSS	Ground
6	5	VOUT1	Output 1

* A Pin number 1 is under the marking of the leftmost of 4 digits.

■ PRODUCT CLASSIFICATION

● SELECTION GUIDE

The following options for the Regulator 1, 2, the EN pin logic, internal pull-up / down are available.

● ORDERING INFORMATION

XC6401①②③④⑤⑥

DESIGNATOR	SYMBOL	DESCRIPTION	DESIGNATOR	SYMBOL	DESCRIPTION
①		Regulator 1, EN type	③④	01 ~	Internally set sequential number relating output voltage of each regulators
	E	Active 'High' (Pull-down resistor built in)			Regulator 1 Output Voltage Range : 0.8 ~ 5.0 V
	F	Active 'High' (No pull-down, resistor built in)			Regulator 2 Output Voltage Range : 0.8 ~ 5.0 V
	G	Active 'Low' (Pull-down resistor built in)			Both 1 and 2 can be set 50 mV steps
	H	Active 'Low' (No pull-down, resistor built in)			Packaging Types
②		Regulator 2, EN type	⑤	D	USP-6B
	E	Active 'High' (Pull-down resistor built in)		M	SOT-26W
	F	Active 'High' (No pull-down, resistor built in)	⑥		Device Orientation
	G	Active 'Low' (Pull-down resistor built in)		R	Embossed Tape: Standard Feed
	H	Active 'Low' (No pull-down, resistor built in)		L	Embossed Tape: Reverse Feed

XC6401 Series

Dual LDO Regulators, Low ESR Cap. Compatible

Preliminary

■ ABSOLUTE MAXIMUM RATINGS

T_a = 25°C

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage	V _{IN}		6.5	V
Output Current	I _{OUT1} + I _{OUT2}		700	mA
Output Voltage	V _{OUT}		V _{SS} -0.3 ~ V _{IN} +0.3	V
EN Pin Voltage	V _{EN}		V _{SS} -0.3 ~ V _{IN} +0.3	V
Power Dissipation	SOT-26W	P _d	250	mW
	USP-6B		100	
Operating Ambient Temperature	T _{opr}		-40 ~ +85	°C
Storage Temperature	T _{stg}		-55 ~ +125	°C

■ ELECTRICAL CHARACTERISTICS

XC6401FFxx

Regulator 1, Regulator 2

T_a=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS	CIRCUIT
Output Voltage (Note 7)	V _{OUT} (E)	V _{IN} =V _{OUT} (T) + 1.0V I _{OUT} =30mA	× 0.98	V _{OUT} (T)	× 1.02	V	1
Maximum Output Current	I _{OUTMAX}	V _{IN} =V _{OUT} (T) + 1.0V	150			mA	1
Load Regulation	ΔV _{OUT}	1mA≤I _{OUT} ≤100mA		15	60	mV	1
Dropout Voltage	V _{dif1}	I _{OUT} =30mA		E-1		mV	1
	V _{dif2}	I _{OUT} =100mA		E-2		mV	
Supply Current	I _{SS}	V _{IN} =V _{EN} =V _{OUT} (T) + 1.0V, I _{OUT} =0mA		25	45	μA	2
Standby Current	I _{STB}	V _{IN} =V _{OUT} (T) + 1.0V, V _{EN} =V _{SS}		0.01	0.10	μA	3
Line Regulation	ΔV _{OUT} / ΔV _{IN} · V _{OUT}	V _{OUT} (T)+1.0V≤V _{IN} ≤6.0V I _{OUT} =30mA		0.01	0.20	% / V	1
Input Voltage	V _{IN}		1.5		6.0	V	
Output Voltage Temperature Characteristics	ΔV _{OUT} / ΔT _{opr} · V _{OUT}	I _{OUT} =30mA -40°C≤T _{opr} ≤85°C		±100		ppm/ °C	1
Ripple Rejection Rate	PSRR	I _{OUT} =30mA, f=1kHz		70		dB	5
Current Limiter	I _{lim}	V _{IN} =V _{OUT} (T) + 1.0V, V _{EN} =V _{IN}		300		mA	1
Short-circuit Current	I _{short}	V _{IN} =V _{OUT} (T) + 1.0V, V _{EN} =V _{IN}		30		mA	1
EN "High" Voltage	V _{ENH}		1.60		V _{IN}	V	4
EN "Low" Voltage	V _{ENL}				0.25	V	4
EN "High" Current	I _{ENH}	V _{IN} =V _{EN} =V _{OUT} (T) + 1.0V	-0.10		0.10	μA	4
EN "Low" Current	I _{ENL}	V _{IN} =V _{EN} =V _{OUT} (T) + 1.0V, V _{EN} =V _{SS}	-0.10		0.10	μA	4

NOTE

(NOTE 1) V_{OUT}(T)=Specified Output Voltage

(NOTE 2) V_{OUT}(E)=Effective Output Voltage

(I.e. the output voltage when "V_{OUT}(T)+1.0V" is provided at the V_{IN} pin while maintaining a certain I_{OUT} value).

(NOTE 3) V_{dif}={V_{IN1}^(NOTE5)-V_{OUT1}^(NOTE4)}

(NOTE 4) V_{OUT1}=A voltage equal to 98% of the Output Voltage whenever an amply stabilized I_{OUT} {V_{OUT}(T)+1.0V} is input.

(NOTE 5) V_{IN1}=The Input Voltage when V_{OUT1} appears as Input Voltage is gradually decreased.

(NOTE 6) Unless otherwise stated, V_{IN}=V_{OUT}(T)+1.0V

(NOTE 7) If V_{OUT} (T) ≤ 1.45V, MIN V_{OUT} (T) - 30mV

MAX V_{OUT} (T) + 30mV

XC6401 Series

Dual LDO Regulators, Low ESR Cap. Compatible

Preliminary

■ DROPOUT VOLTAGE

SETTING OUTPUT VOLTAGE	OUTPUT VOLTAGE		DROPOUT VOLTAGE 1		DROPOUT VOLTAGE 2	
	(V)		E-1 (mV)		E-2 (mV)	
(V)	VOUT		Vdif 1		Vdif 2	
VOUT (V)	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
0.80	0.770	0.830	300	700	400	800
0.85	0.820	0.880		200	600	350
0.90	0.870	0.930			350	700
0.95	0.920	0.980				
1.00	0.970	1.030	100	500	270	600
1.05	1.020	1.080		80	400	240
1.10	1.070	1.130			500	500
1.15	1.120	1.180	65	300	200	400
1.20	1.170	1.230		60	200	180
1.25	1.220	1.280			100	300
1.30	1.270	1.330	55	100	165	250
1.35	1.320	1.380		50	150	200
1.40	1.370	1.430			200	200
1.45	1.420	1.480	45	65	140	
1.50	1.470	1.530		75	180	
1.55	1.519	1.581			240	
1.60	1.568	1.632	40		300	
1.65	1.617	1.683	60	200		
1.70	1.666	1.734		270		
1.75	1.715	1.785	40	120	170	180
1.80	1.764	1.836		60	140	
1.85	1.813	1.887			180	
1.90	1.862	1.938	35	55	110	
1.95	1.911	1.989		55	160	
2.00	1.960	2.040				
2.05	2.009	2.091	40	60	120	170
2.10	2.058	2.142		60	170	
2.15	2.107	2.193				
2.20	2.156	2.244	35	120	170	180
2.25	2.205	2.295		55	180	
2.30	2.254	2.346				
2.35	2.303	2.397	35	140	190	200
2.40	2.352	2.448		55	200	
2.45	2.401	2.499			250	
2.50	2.450	2.550	35	180	250	200
2.55	2.499	2.601		55	250	
2.60	2.548	2.652			300	
2.65	2.597	2.703	35	200	270	200
2.70	2.646	2.754		55	270	
2.75	2.695	2.805			320	
2.80	2.744	2.856	35	220	300	200
2.85	2.793	2.907		55	300	
2.90	2.842	2.958			350	
2.95	2.891	3.009	35	270	350	200

XC6401 Series

Dual LDO Regulators, Low ESR Cap. Compatible

Preliminary

■ DROPOUT VOLTAGE

SETTING OUTPUT VOLTAGE (V)	OUTPUT VOLTAGE (V)		DROPOUT VOLTAGE 1 E-1 (mV)		DROPOUT VOLTAGE 2 E-2 (mV)	
	VOUT		Vdif 1		Vdif 2	
VOUT (T)	MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
3.00	2.940	3.060				
3.05	2.989	3.111				
3.10	3.038	3.162				
3.15	3.087	3.213				
3.20	3.136	3.264				
3.25	3.185	3.315				
3.30	3.234	3.366				
3.35	3.283	3.417				
3.40	3.332	3.468				
3.45	3.381	3.519				
3.50	3.430	3.570				
3.55	3.479	3.621				
3.60	3.528	3.672				
3.65	3.577	3.723				
3.70	3.626	3.774				
3.75	3.675	3.825				
3.80	3.724	3.876				
3.85	3.773	3.927				
3.90	3.822	3.978				
3.95	3.871	4.029				
4.00	3.920	4.080	30	45	100	150
4.05	3.969	4.131				
4.10	4.018	4.182				
4.15	4.067	4.233				
4.20	4.116	4.284				
4.25	4.165	4.335				
4.30	4.214	4.386				
4.35	4.263	4.437				
4.40	4.312	4.488				
4.45	4.361	4.539				
4.50	4.410	4.590				
4.55	4.459	4.641				
4.60	4.508	4.692				
4.65	4.557	4.743				
4.70	4.606	4.794				
4.75	4.655	4.845				
4.80	4.704	4.896				
4.85	4.753	4.947				
4.90	4.802	4.998				
4.95	4.851	5.049				
5.00	4.900	5.100				

XC6401 Series


Dual LDO Regulators, Low ESR Cap. Compatible

Preliminary

■ OPERATIONAL EXPLANATION

Output voltage control with the XC6401 series:

The voltage divided by resistors R1 & R2 is compared with the internal reference voltage by the error amplifier. The P-Channel MOSFETs, which are connected to the VOUT1 and VOUT2 pins, are then driven by the subsequent output signal. The output voltages at the VOUT1 and VOUT2 pins are controlled and stabilized by a system of negative feedback. The current limit circuit and short protect circuit operate in relation to the level of output current. Further, the IC's internal circuitry can be shutdown via the EN pin's signal.

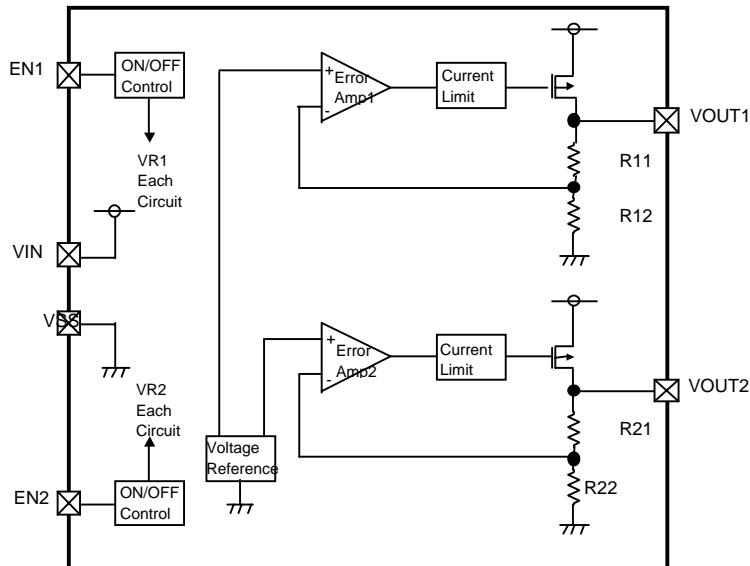

Low ESR Capacitors

With the XC6401 series, a stable output voltage is achievable even if used with low ESR capacitors as a phase compensation circuit is built-in. In order to ensure the effectiveness of the phase compensation, we suggest that output capacitors (CL1, CL2) is connected as close as possible to the output pins (VOUT1 and VOUT2) and the VSS pin. Please use an output capacitor with a capacitance value of at least 1 μ F. Also, please connect an input capacitor (CIN) of 0.1 μ F between the VIN pin and the VSS pin in order to ensure a stable power input.

Current Limiter, Short-Circuit Protection

The XC6401 series includes a combination of a fixed current limiter circuit & a foldback circuit which aid the operations of the current limiter and circuit protection. When the load current reaches the current limit level, the fixed current limiter circuit operates and output voltage drops. As a result of this drop in output voltage, the foldback circuit operates, output voltage drops further and output current decreases. When the output pin is shorted, a current of about 30mA flows.

EN Pins

The IC's internal circuitry can be shutdown via the signal from the EN1 and EN2 pins with the XC6401 series. In shutdown mode, output at the VOUT1 and VOUT2 pins will be pulled down to the VSS level via R11 & R12 and R21 & R22. The operational logic of the IC's EN1 and EN2 pins are selectable (please refer to the selection guide on page 2). Note that as the standard XC6401FF type's regulator 1 and 2 are both 'High Active/No Pull Down', operations will become unstable with the EN1 or EN2 pins open. Although the EN1 and EN2 pins are equal to an inverter input with CMOS hysteresis, with either the pull-up or pull-down options, the EN1 and EN2 pins input current will increase when the IC is in operation. We suggest that you use this IC with either a VIN voltage or a VSS voltage input at the EN1 and EN2 pins. If this IC is used with the correct specifications for the EN1 and EN2 pins, the operational logic is fixed and the IC will operate normally. However, supply current may increase as a result of through current in the IC's internal circuitry.

■ NOTE ON USE

- 1 Please use this IC within the stated absolute maximum ratings.
The IC is liable to malfunction should the ratings be exceeded.
- 2 Where wiring impedance is high, operations may become unstable due to noise and/or phase lag depending on output current. Please keep the resistance low between VIN and VSS wiring in particular.
- 3 Please wire the input capacitor (CIN) and the output capacitors (CL1, CL2) as close to the IC as possible.


XC6401 Series

Dual LDO Regulators, Low ESR Cap. Compatible

Preliminary

■ TEST CIRCUITS


Circuit ①

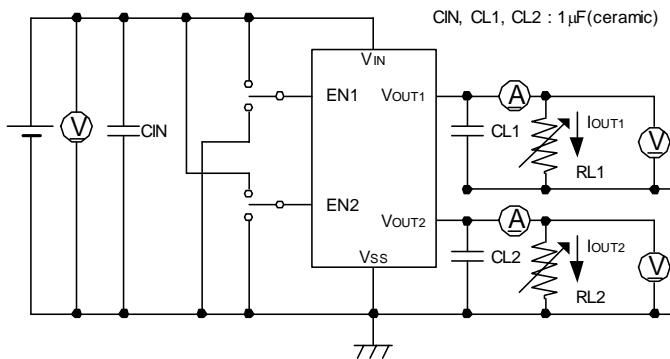

EN1/EN2 :

- Active 'High' = EN=V_{IN}
- Active 'Low' = EN=V_{SS}


Circuit ②

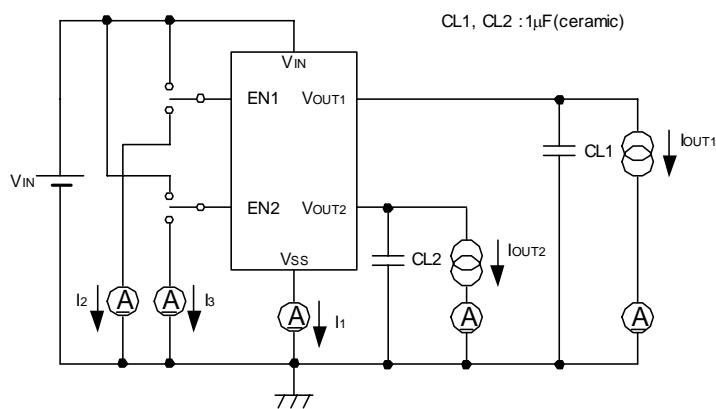

EN1/EN2 :

1. Active 'High' (Pull-down resistor built-in)
 - VR1 Supply Current $ISS_1=I_1$ (Note: EN1=ON, EN2=OFF)
 - VR2 Supply Current $ISS_2=I_1$ (Note: EN1=OFF, EN2=ON)
2. Active 'High' (Pull-down, no resistor built-in)
 - VR1 Supply Current $ISS_1=I_1$ (Note: EN1=ON, EN2=OFF)
 - VR2 Supply Current $ISS_2=I_1$ (Note: EN1=OFF, EN2=ON)
3. Active 'Low' (Pull-up resistor built-in)
 - VR1 Supply Current $ISS_1=I_1+I_2$ (Note: EN1=ON, EN2=OFF)
 - VR2 Supply Current $ISS_2=I_1+I_3$ (Note: EN1=OFF, EN2=ON)
4. Active 'Low' (Pull-up, no resistor built-in)
 - VR1 Supply Current $ISS_1=I_1$ (Note: EN1=ON, EN2=OFF)
 - VR2 Supply Current $ISS_2=I_1$ (Note: EN1=OFF, EN2=ON)

Circuit ③

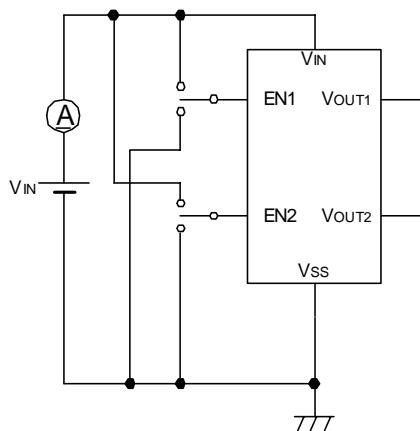

EN1/EN2 :

- Active 'High' = EN=V_{SS}
- Active 'Low' = EN=V_{IN}


XC6401 Series

Dual LDO Regulators, Low ESR Cap. Compatible


Preliminary

■ TEST CIRCUITS (Continued)

Circuit ④

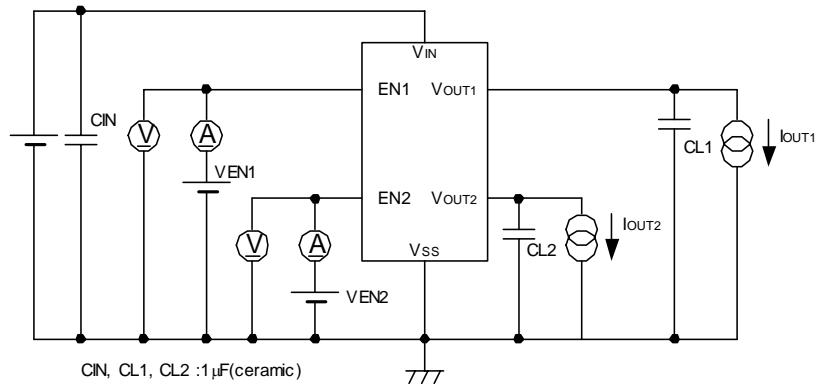

Circuit ⑤

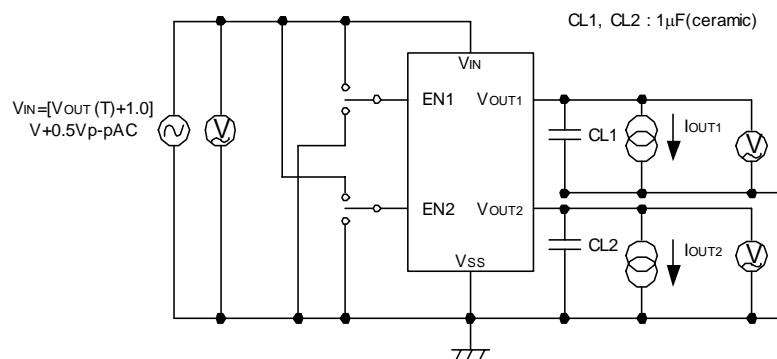

EN1/EN2 :

Active 'High' = EN=VIN

Active 'Low' = EN=VSS







XC6401 Series

Dual LDO Regulators, Low ESR Cap. Compatible

Preliminary

■ TYPICAL PERFORMANCE CHARACTERISTICS

(1) Output Voltage vs. Output Current

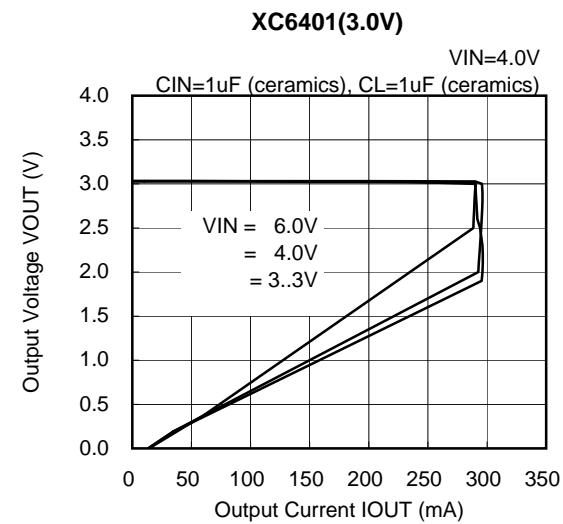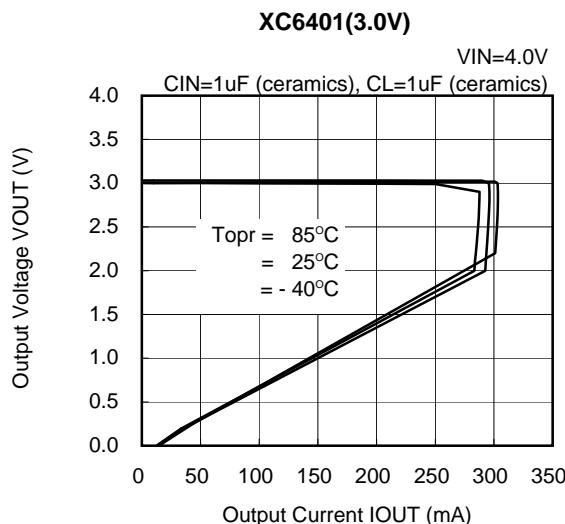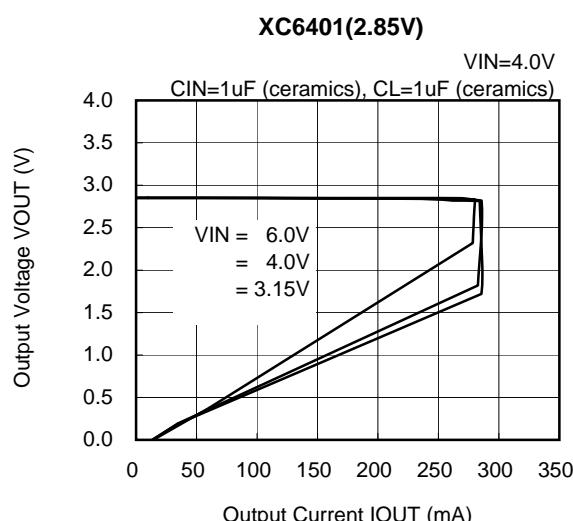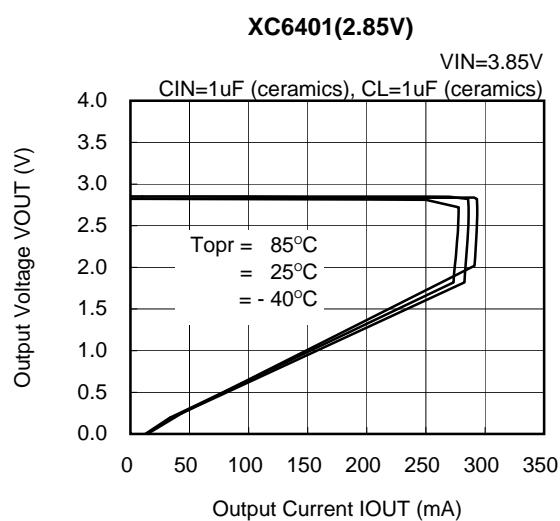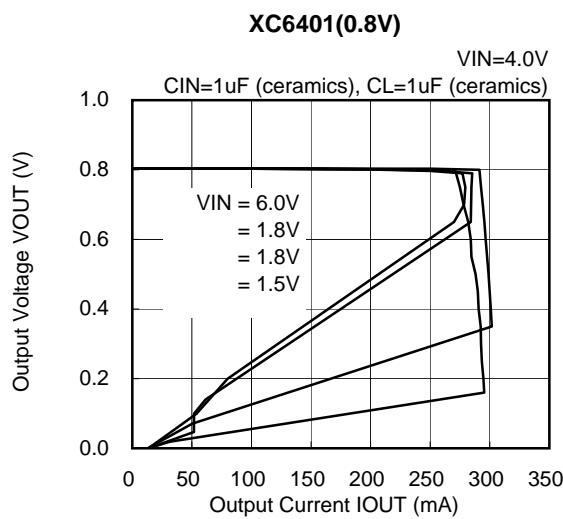
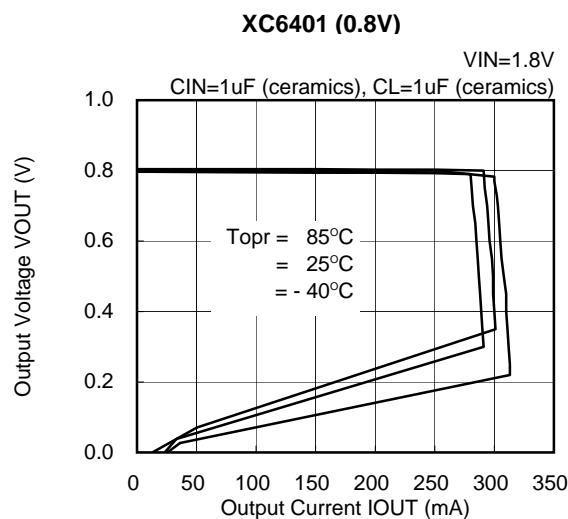


XC6401 Series





Dual LDO Regulators, Low ESR Cap. Compatible

Preliminary

(1) Output Voltage vs. Output Current (Continued)

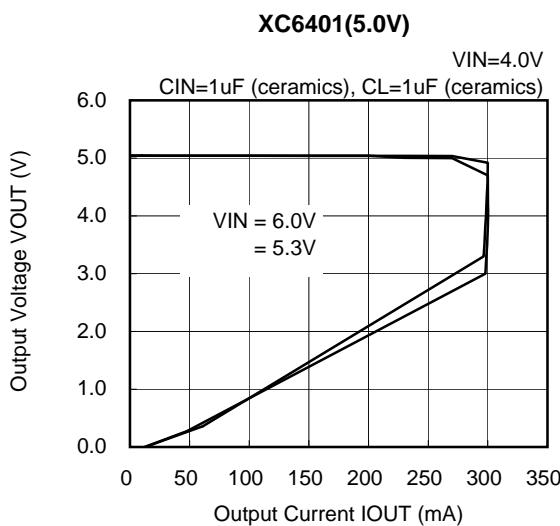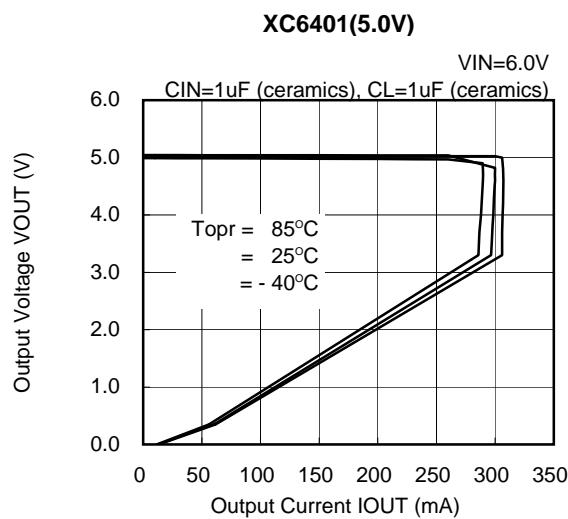

(2) Output Voltage vs. Input Voltage

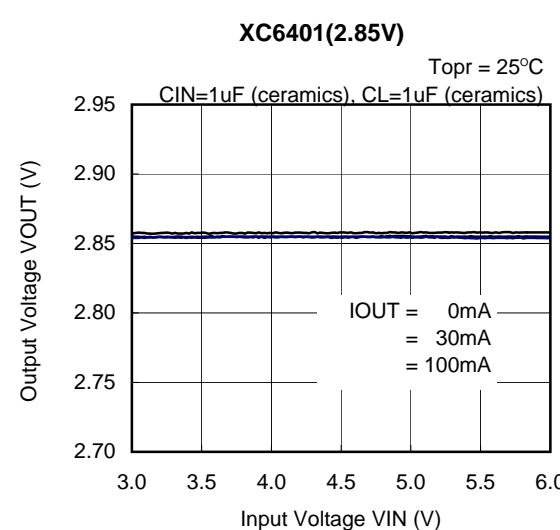
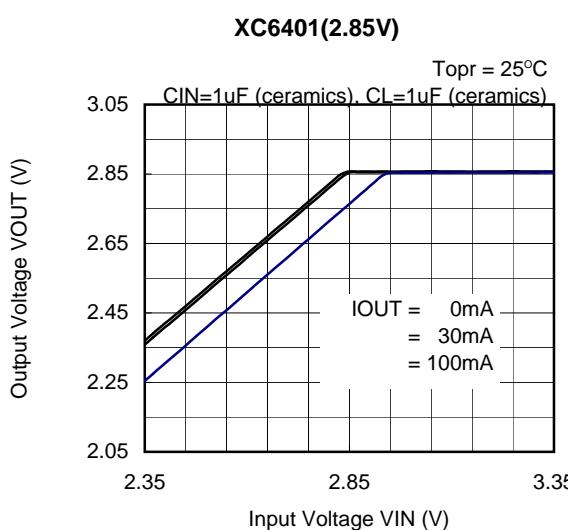
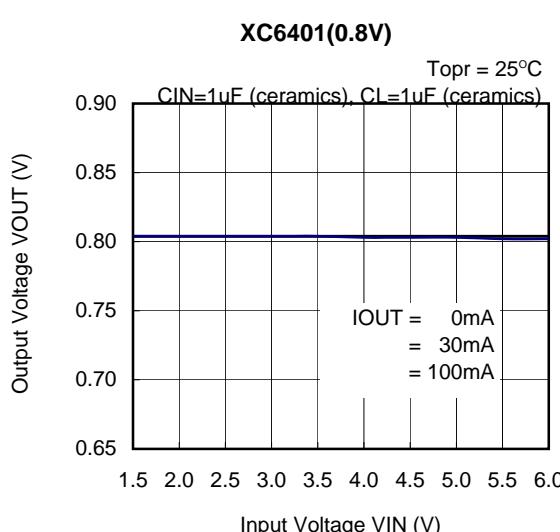
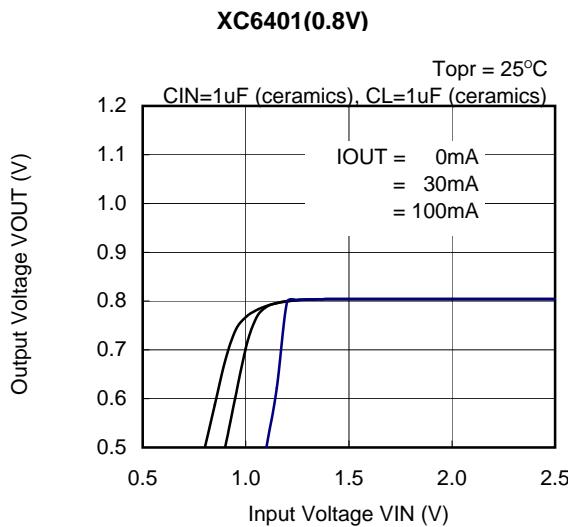


XC6401 Series



Dual LDO Regulators, Low ESR Cap. Compatible

Preliminary

(2) Output Voltage vs. Input Voltage (Continued)

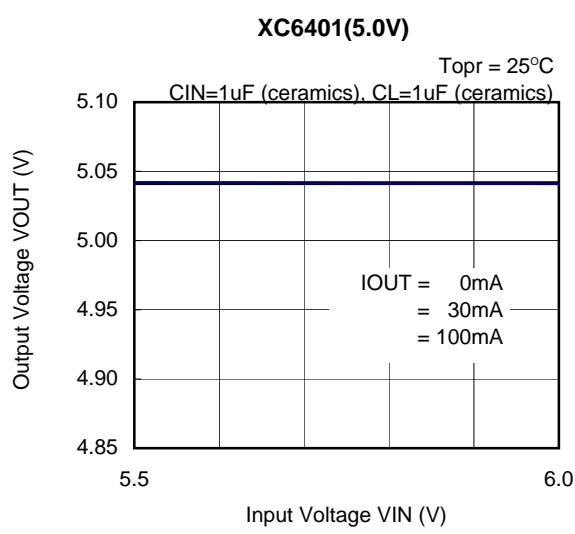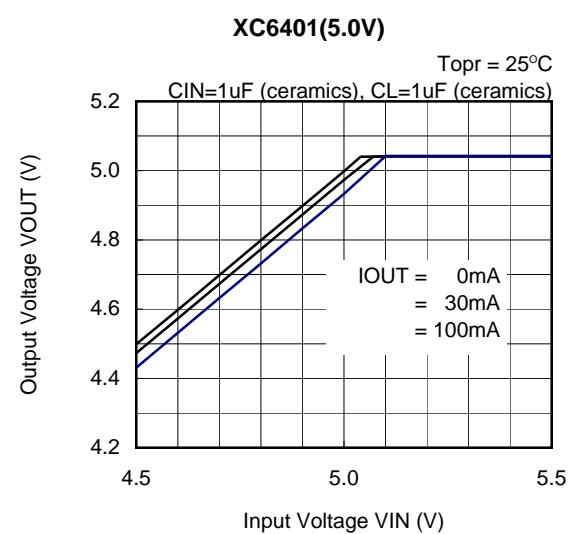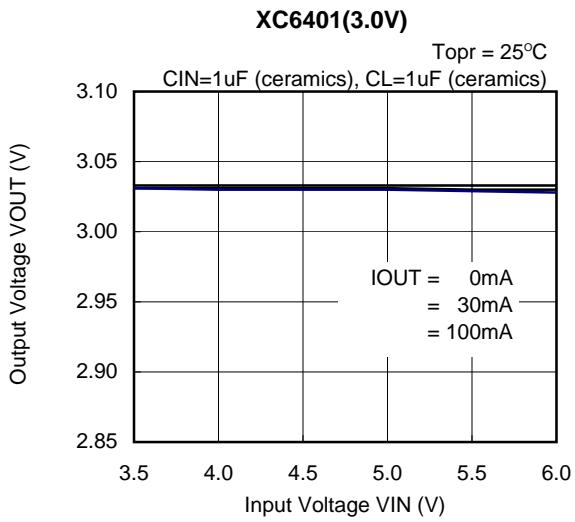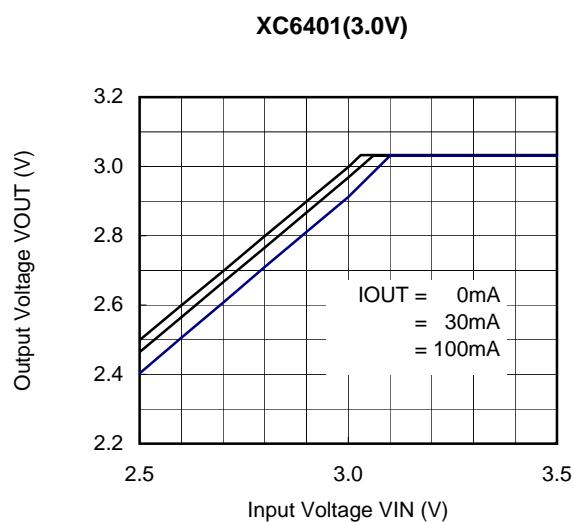

(3) Dropout Voltage vs. Output Current

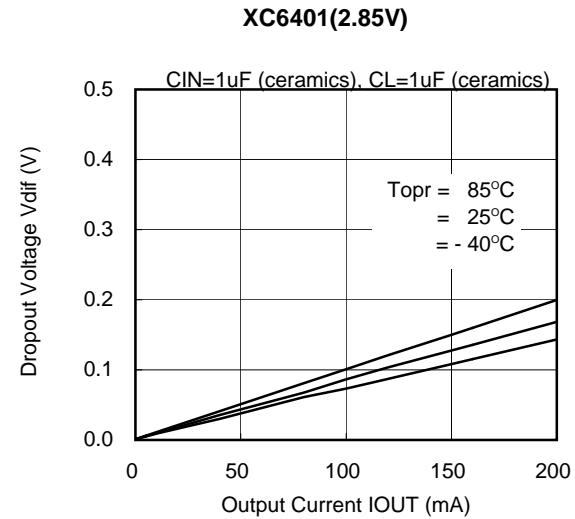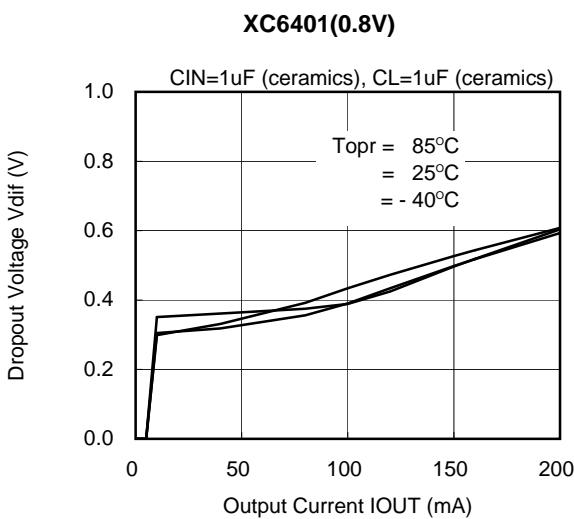


XC6401 Series

Dual LDO Regulators, Low ESR Cap. Compatible


Preliminary

(3) Dropout Voltage vs. Output Current (Continued)


XC6401(3.0V)

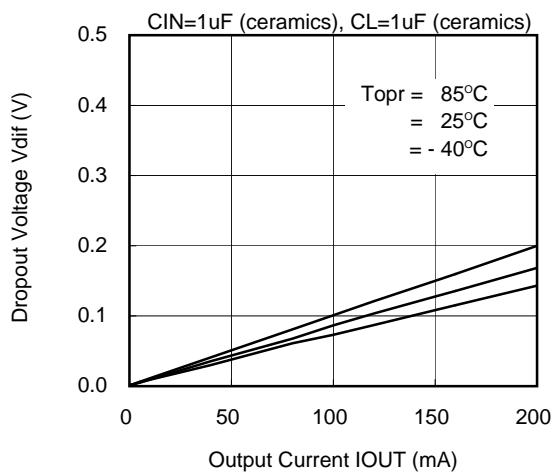


XC6401(5.0V)

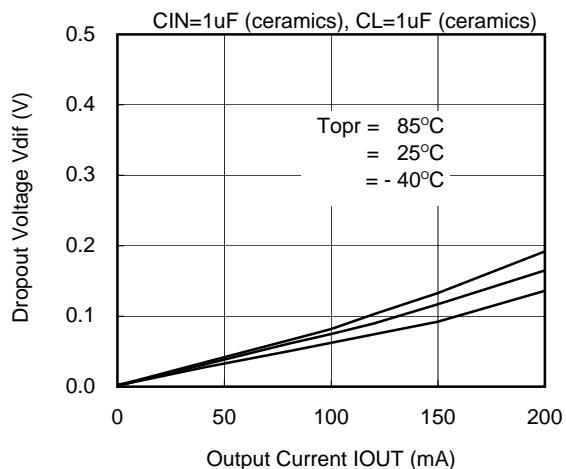


XC6401(0.8V)

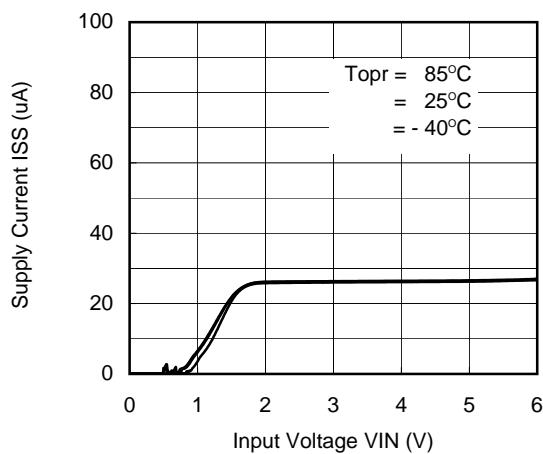


XC6401(2.85V)

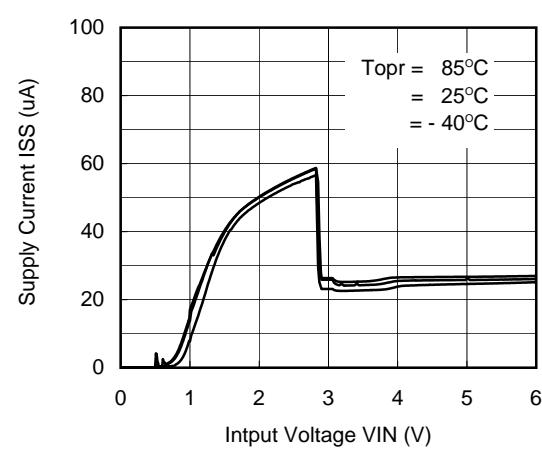

XC6401(3.0V)

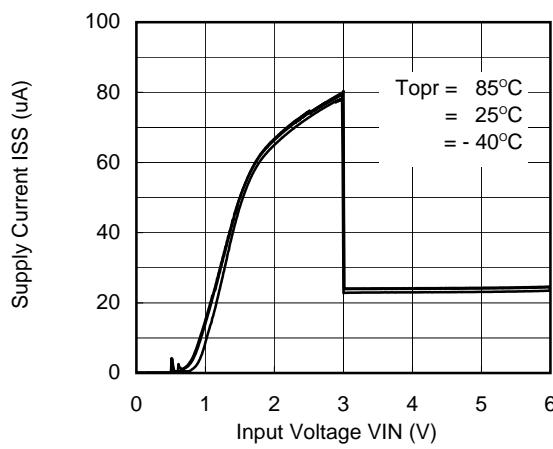

XC6401(5.0V)




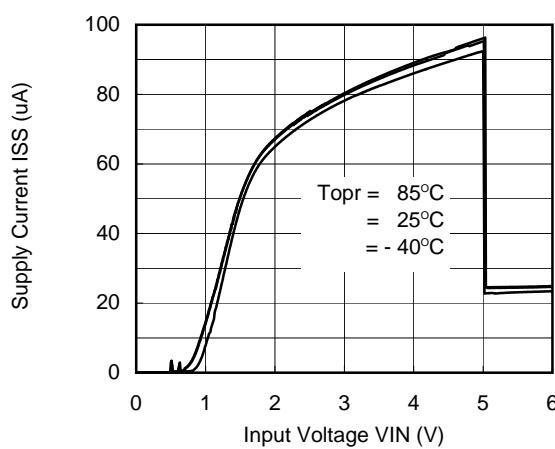


XC6401 Series



Dual LDO Regulators, Low ESR Cap. Compatible

Preliminary

(5) Output Voltage vs. Ambient Temperature

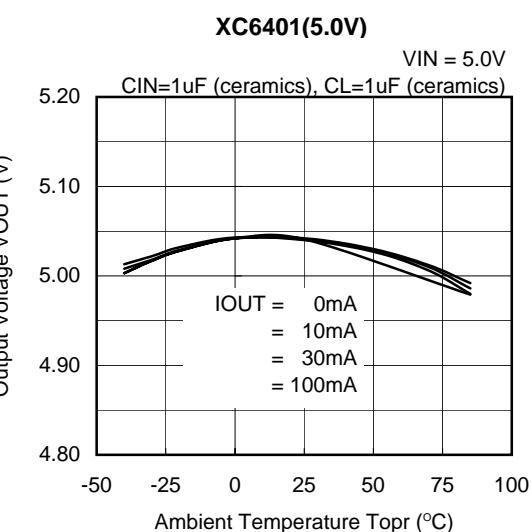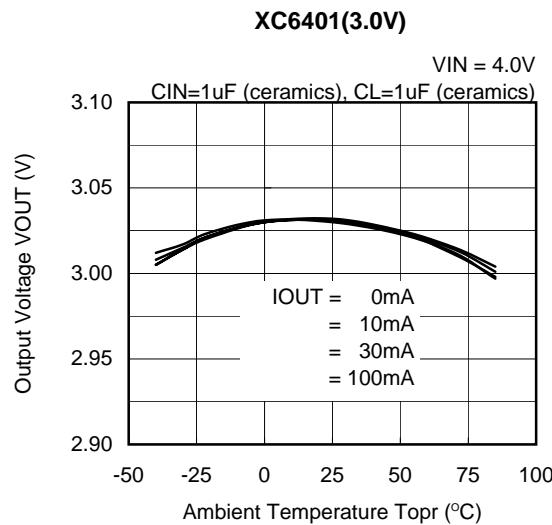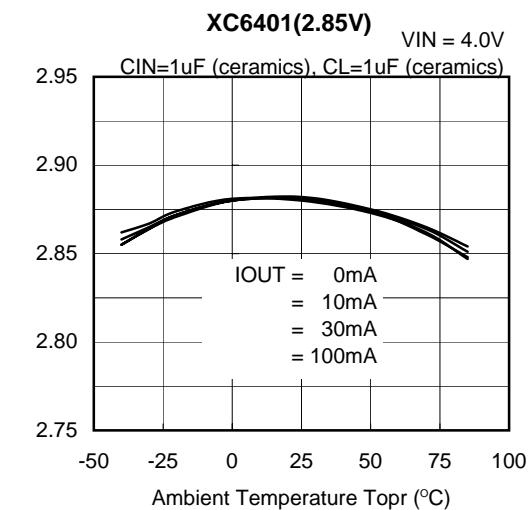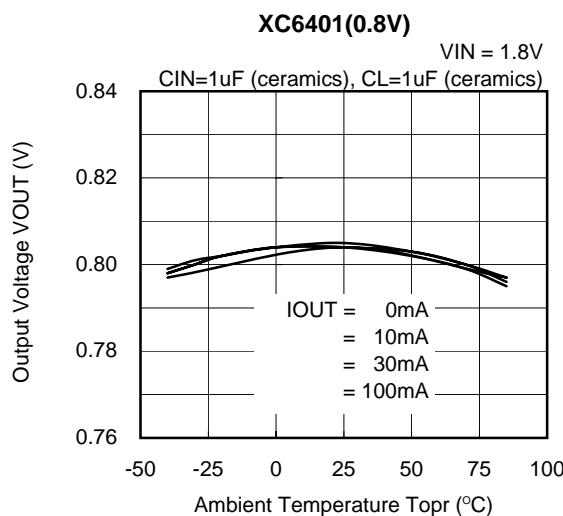

(6) Supply Current vs. Ambient Temperature

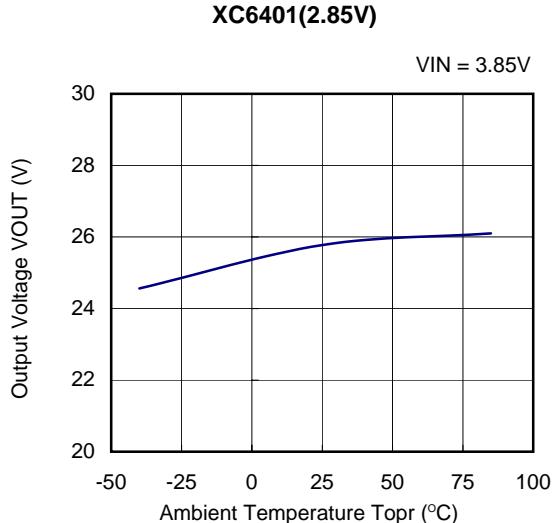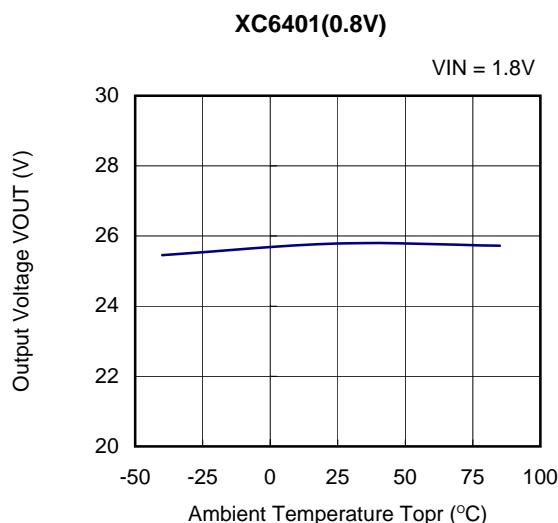

XC6401 Series


Dual LDO Regulators, Low ESR Cap. Compatible

Preliminary

(6) Supply Current vs. Ambient Temperature (Continued)


XC6401(3.0V)

VIN = 4.0V

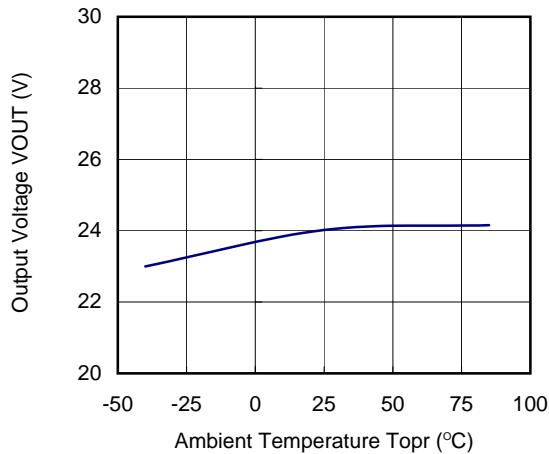

XC6401(5.0V)

VIN = 6.0V






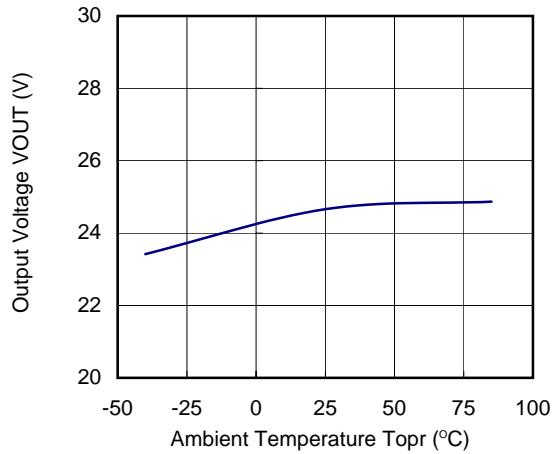


XC6401 Series

Dual LDO Regulators, Low ESR Cap. Compatible

Preliminary

(7) Input Transient Response

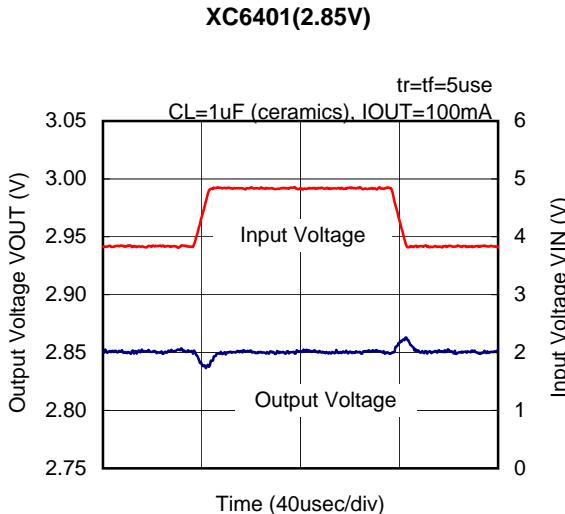
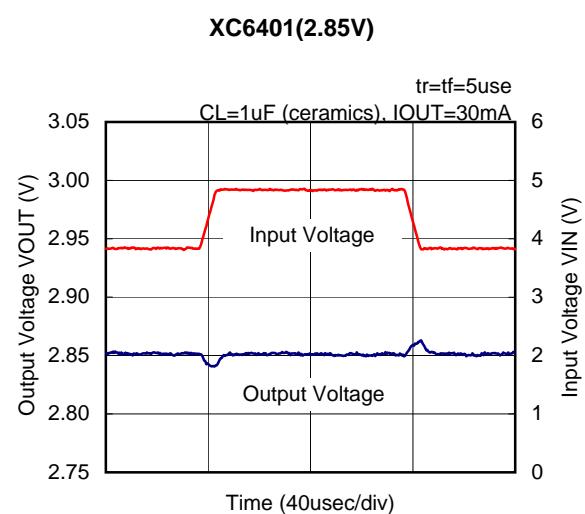
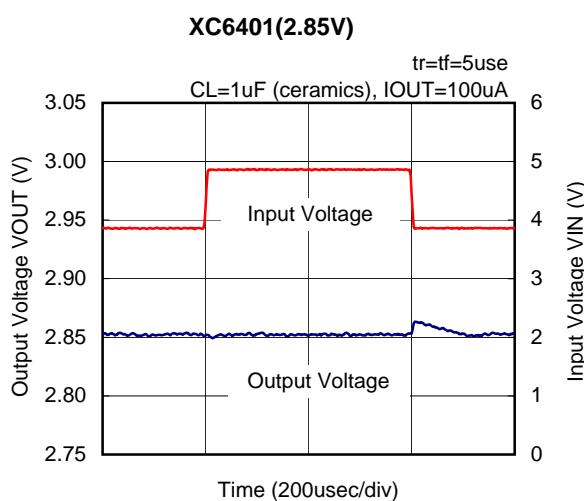
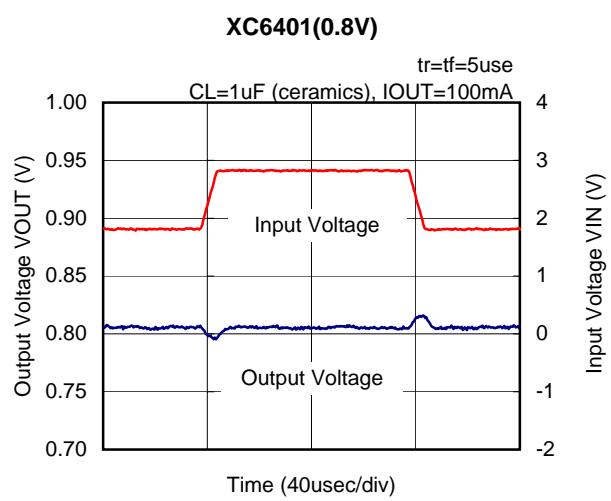
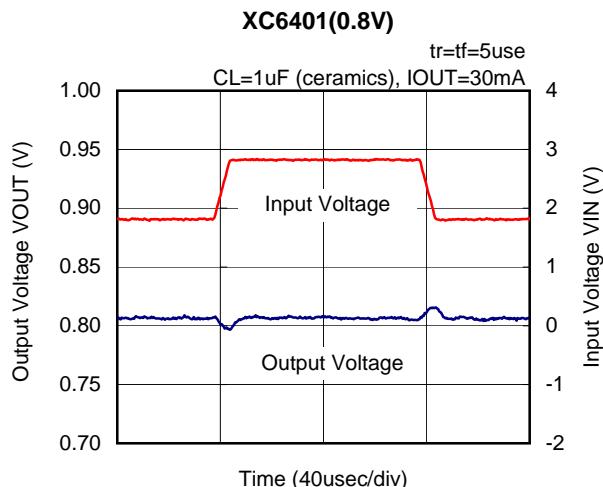
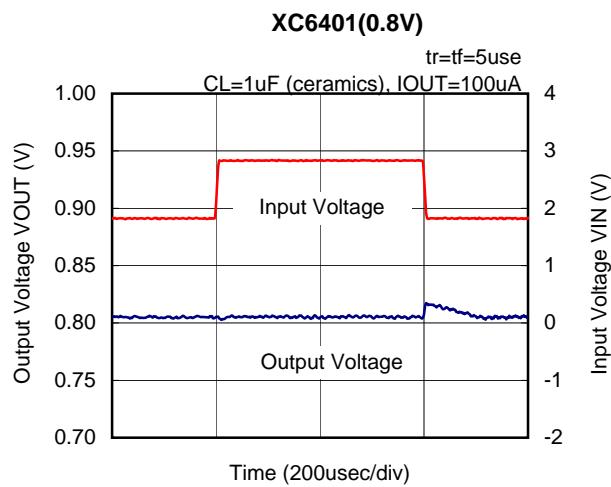


XC6401 Series

Dual LDO Regulators, Low ESR Cap. Compatible

Preliminary

(7) Input Transient Response (Continued)

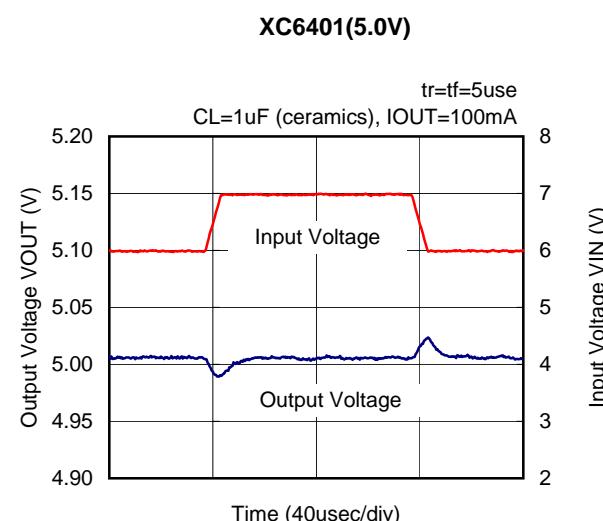
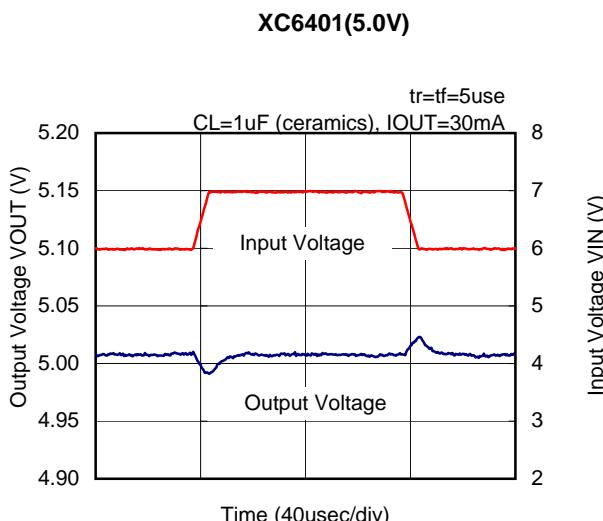
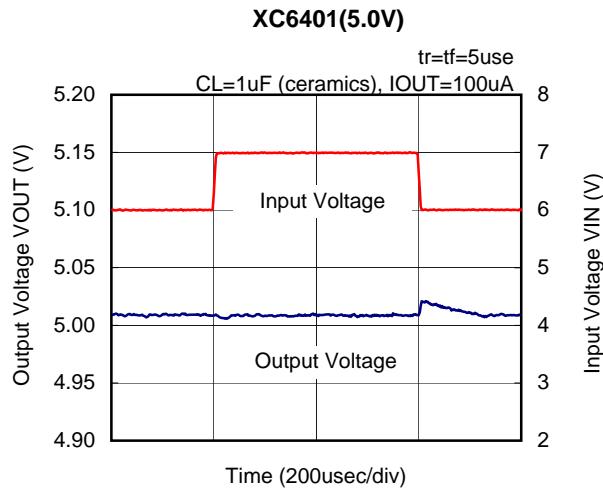
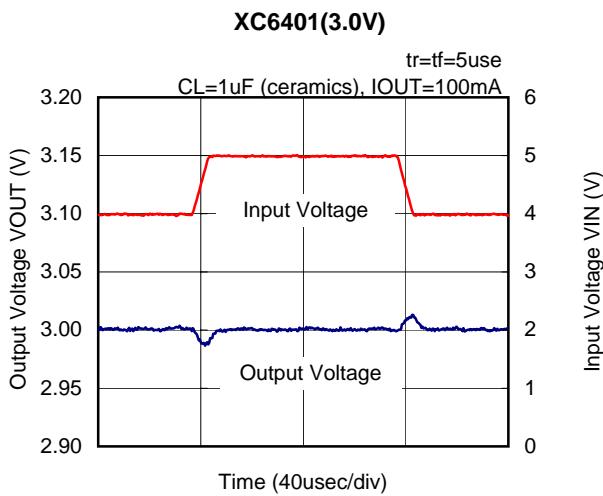
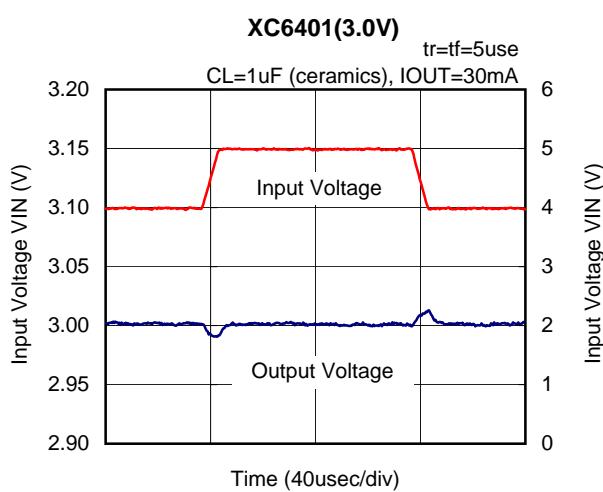
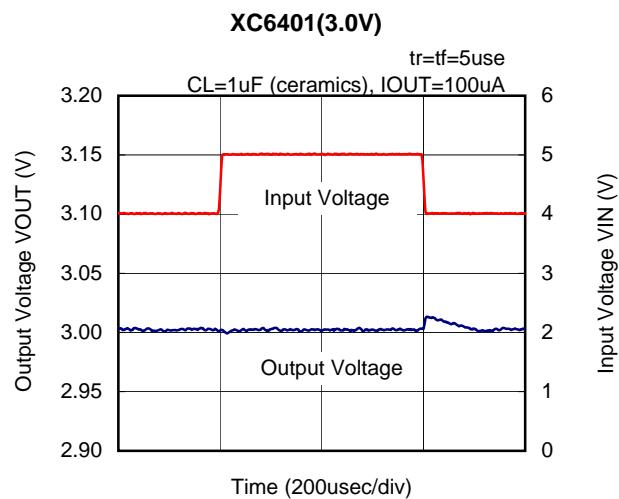


XC6401 Series

Dual LDO Regulators, Low ESR Cap. Compatible

Preliminary

(8) Load Transient Response

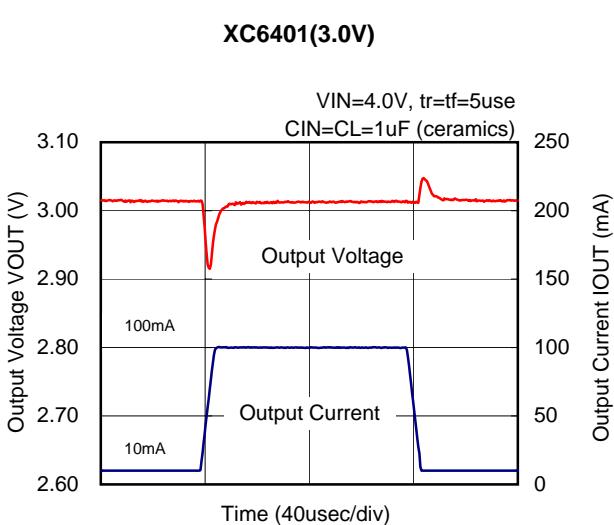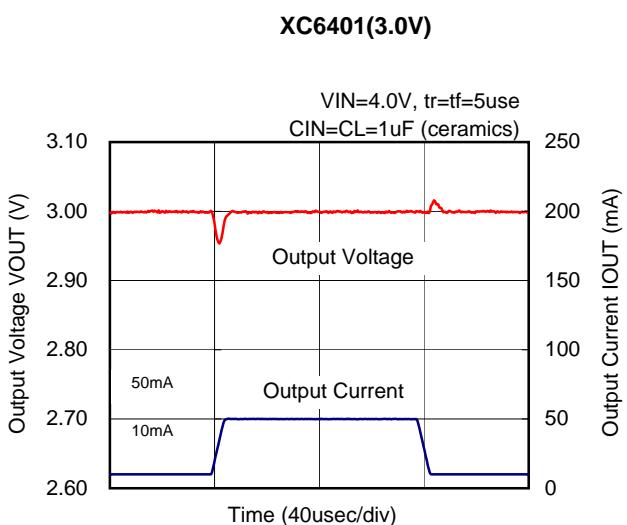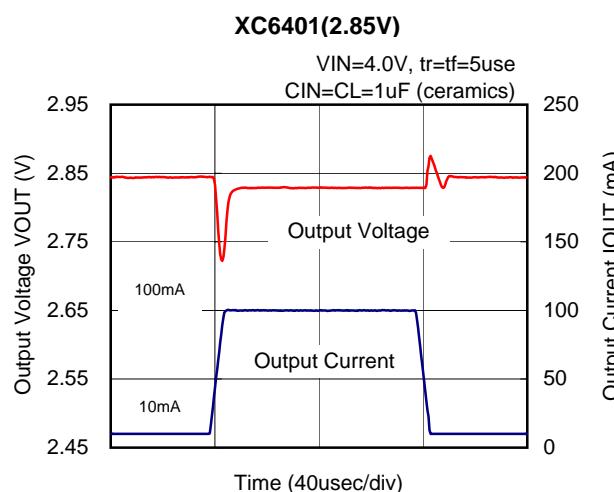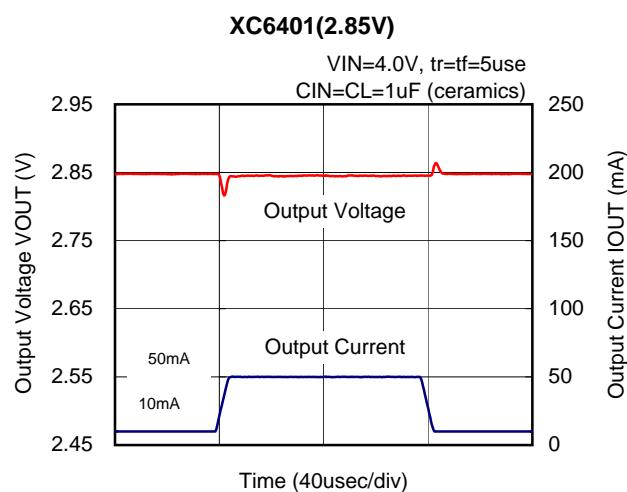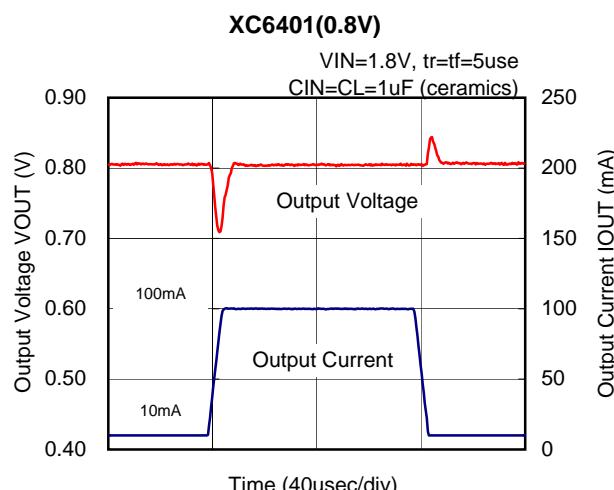
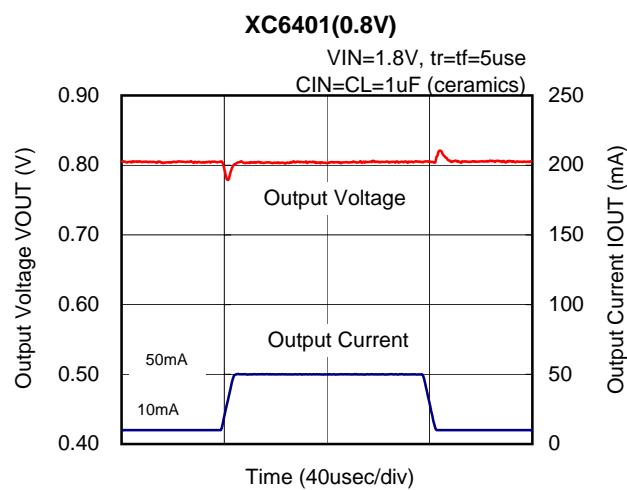


XC6401 Series

Dual LDO Regulators, Low ESR Cap. Compatible

Preliminary

(8) Load Transient Response (Continued)



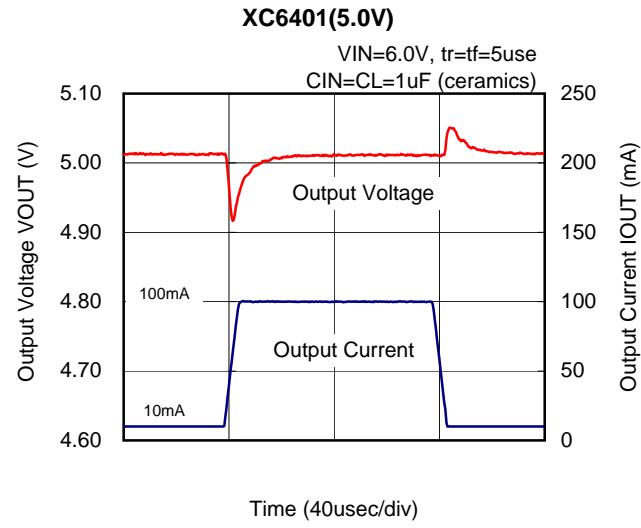
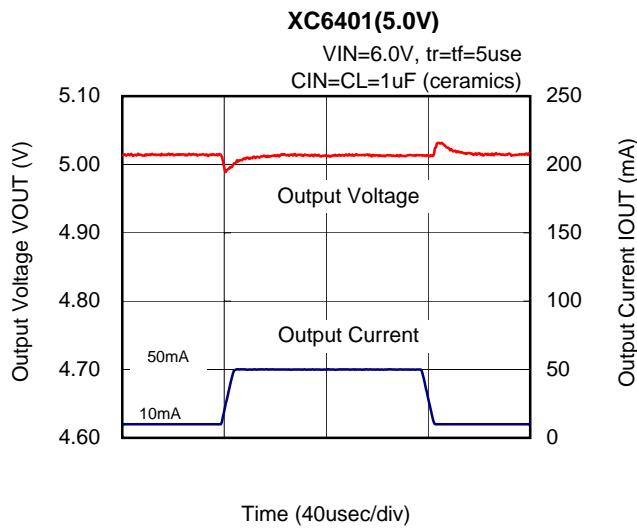


XC6401 Series

Dual LDO Regulators, Low ESR Cap. Compatible

Preliminary

(9) Ripple Rejection Rate

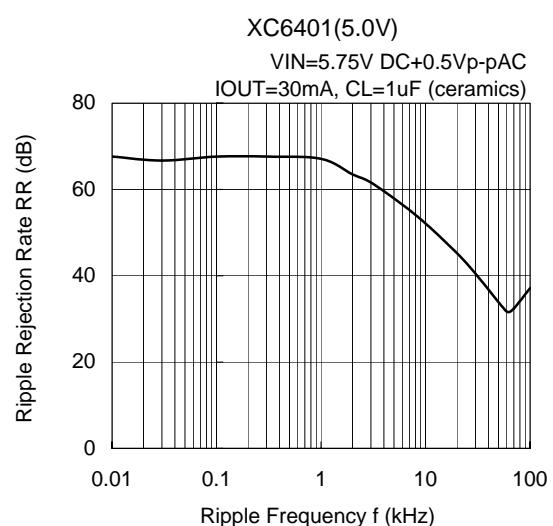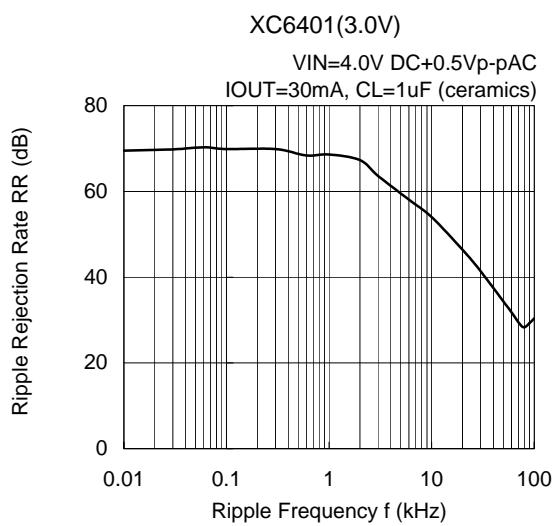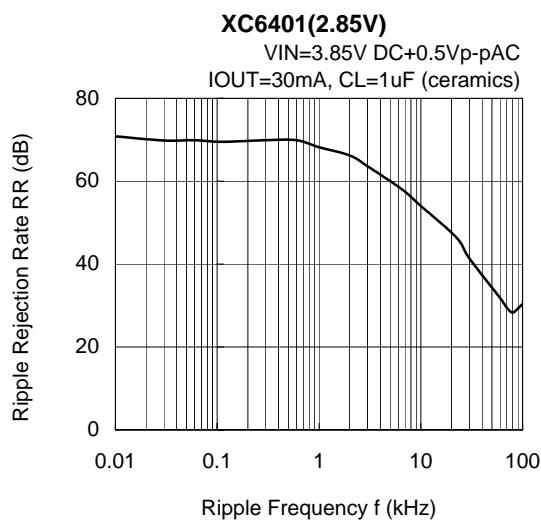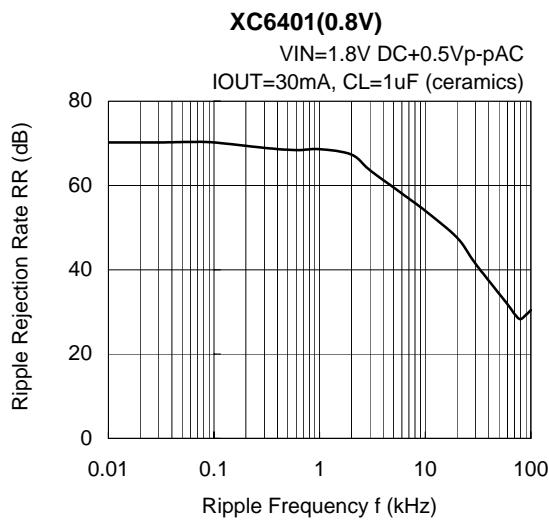

(10) Cross Talk

XC6401 (VR1:3.0V, VR2:2.85V)

