

NJM555


The NJM555 monolithic timing circuit is a highly stable controller capable of producing accurate time delays or oscillation. In the time delay mode, delay time is precisely controlled by only two external parts: a resistor and a capacitor. For operation as an oscillator, both the free running frequency and the duty cycle are accurately controlled by two external resistors and a capacitor.

Terminals are provided for triggering and resetting. The circuit will trigger and reset on falling waveforms. The output can source or sink up to 200mA or drive TTL circuits.

■ Absolute Maximum Ratings (Ta=25°C)

Supply Voltage	V ⁺	18V
Power Dissipation	P _D (D-Type)	500mW
	(M,E-Type)	300mW
	(L-Type)	700mW
Operating Temperature Range	T _{opr}	-20~+75°C
Storage Temperature Range	T _{stg}	-40~+125°C

■ Package Outline



■ Electrical Characteristics (V⁺=5~15V, Ta=25°C)


Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Supply Voltage	V ⁺		4.5	—	16	V
Supply Current (Note 1)	I _{CC}	V ⁺ =5V, R _L =∞	—	3.0	6.0	mA
Supply Current (Note 1)	I _{CC}	V ⁺ =15V, R _L =∞	—	10	15	mA
Timing Error (Note 2)						
Initial Accuracy	E _i	Ta=-20~75°C, V ⁺ =5~15V	—	1.0	—	%
Drift with Temperature	E _t	Ta=-20~75°C, V ⁺ =5~15V	—	50	—	ppm/°C
Drift with Supply Voltage	E _v	Ta=-20~75°C, V ⁺ =5~15V	—	0.1	—	%/V
Threshold Voltage	V _{th}		—	2/3	—	×V ⁺
Trigger Voltage	V _T	V ⁺ =15V	—	5.0	—	V
Trigger Voltage	V _T	V ⁺ =5V	—	1.67	—	V
Trigger Current	I _T		—	0.5	—	μA
Reset Voltage	V _R		0.4	0.5	1.0	V
Reset Current	I _R		—	0.1	—	mA
Threshold Current	I _{th}		—	0.1	0.25	μA
Control Voltage Level	V _{CL}	V ⁺ =15V	9	10	11	V
Control Voltage Level	V _{CL}	V ⁺ =5V	2.6	3.33	4.0	V
Output Voltage (Low)	V _{OL}	V ⁺ =15V Isink=10mA	—	0.1	0.25	V
Output Voltage (Low)	V _{OL}	V ⁺ =15V Isink=50mA	—	0.4	0.75	V
Output Voltage (Low)	V _{OL}	V ⁺ =15V Isink=100mA (Note 3)	—	2.0	2.5	V
Output Voltage (Low)	V _{OL}	V ⁺ =15V Isink=200mA (Note 3)	—	2.5	—	V
Output Voltage (Low)	V _{OL}	V ⁺ =5V Isink=5mA	—	0.25	0.35	V
Output Voltage (High)	V _{OH}	V ⁺ =15V Isource=200mA (Note 3)	—	12.5	—	V
Output Voltage (High)	V _{OH}	V ⁺ =15V Isource=100mA (Note 3)	12.75	13.3	—	V
Output Voltage (High)	V _{OH}	V ⁺ =15V Isource=40mA	—	13.5	—	V
Output Voltage (High)	V _{OH}	V ⁺ =5V Isource=100mA	2.75	3.3	—	V
Rise Time of Output	t _r	No Loading	—	100	—	ns
Fall Time of Output	t _f	No Loading	—	100	—	ns

Note 1: Low output condition (When the output is high, it is lower than the low output condition by 1mA in the standard specification.)

Note 2: R_A, R_B=1k~100kΩ, C=0.1μF, V⁺=15V from 5V


Note 3: Not specified for NJM555M/NJM555E

■ Equivalent Circuit

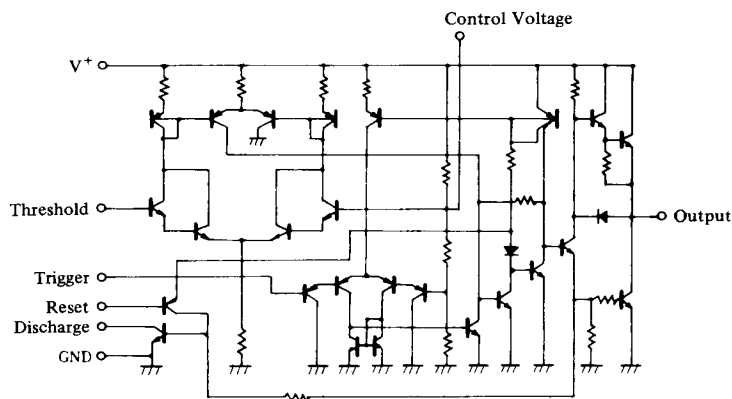

■ Connection Diagram

D,M,E-Type
(Top View)




PIN FUNCTION

1. GND
2. Trigger
3. Output
4. Reset
5. Control Voltage
6. Threshold
7. Discharge
8. V+


■ Typical Application

(1) 50% Duty Cycle Oscillator

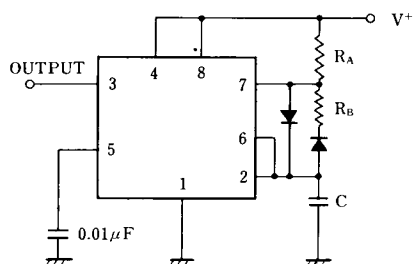


Duty cycle 50% at $R_A = R_B$
Due to R_A, R_B value
the duty ratio becomes
lower than 50%.

L-Type




(2) Oscillation frequency can be changed by changing the control voltage.

(3) Pulse Width Modulation






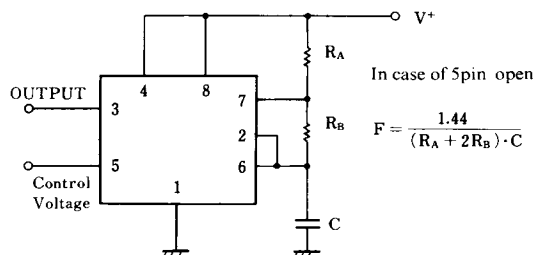


In case of 5pin open

$$F = \frac{1.44}{(R_A + 2R_B) \cdot C}$$

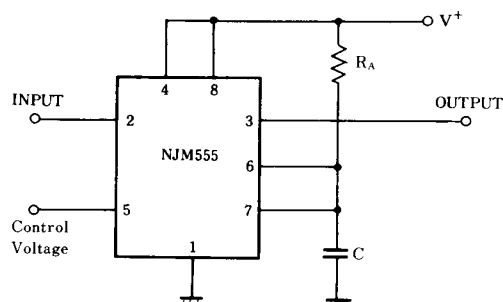

■ Typical Characteristics

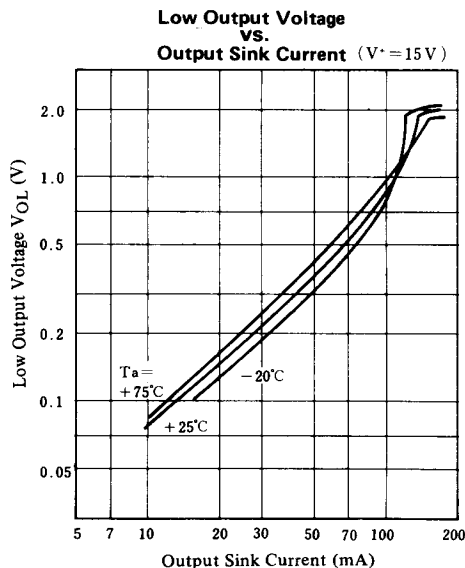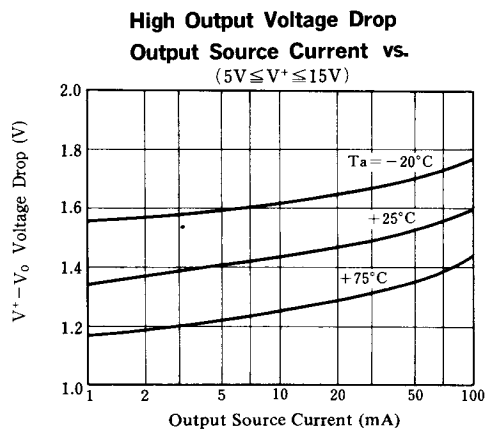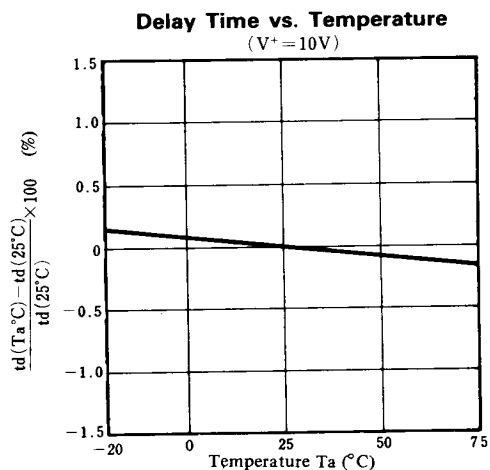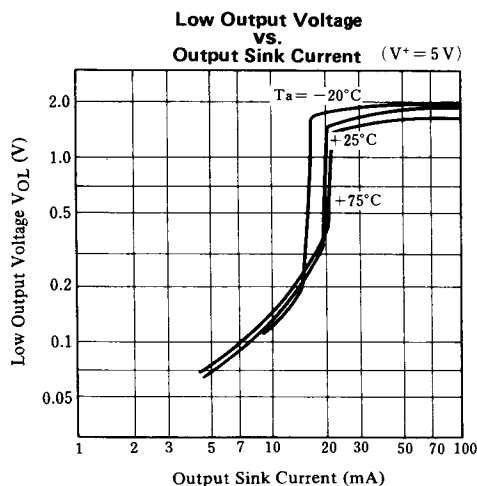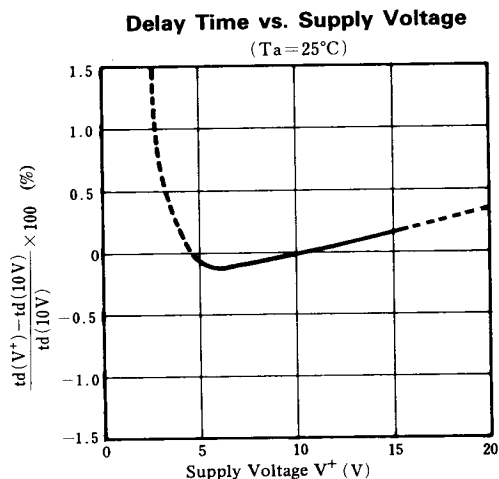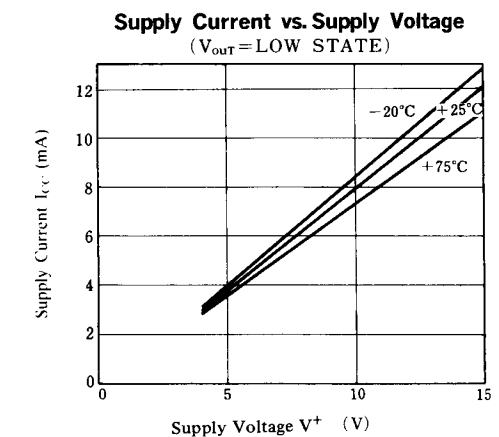

■ Typical Applications

1. Monostable Operation

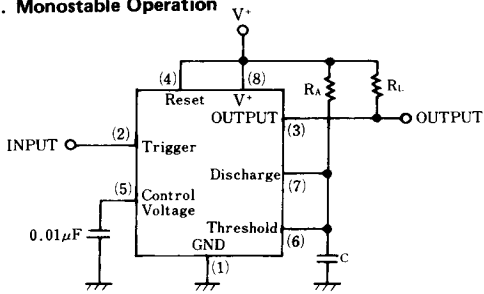


Fig. 1

2. Free Running Operation

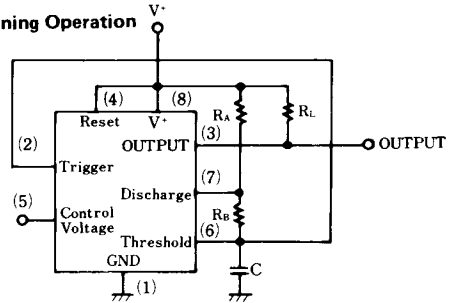


Fig. 3

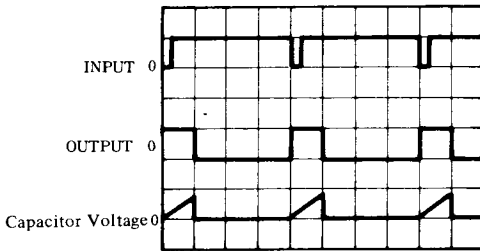


Fig.2 Wave Form



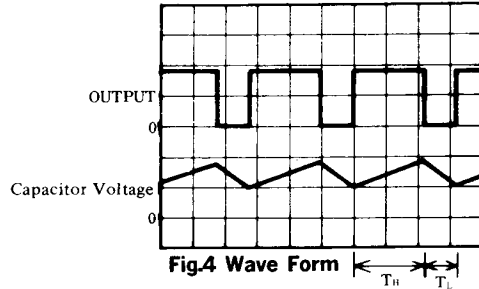


Fig.4 Wave Form

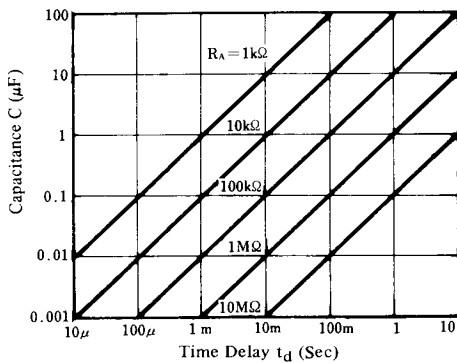

Time Delay vs. R_A , R_B and C

Fig. 2 shows a typical example of the monostable operation. $T_H = 1.1R_A \cdot C$ assuming that T_H be the time at the high output level in this figure.

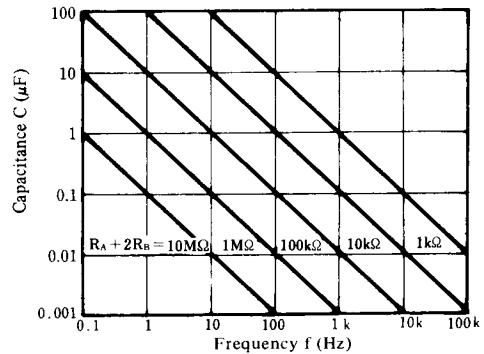

Free Running Frequency vs. R_A , R_B and C

Fig. 4 shows a typical example of the free running operation.

The charge time (output High) is given by:

$$T_H = 0.693 (R_A + R_B) \cdot C$$

And the discharge time (output Low) by:

$$T_L = 0.693 R_B \cdot C$$

The frequency of oscillation is:

$$F = \frac{1.44}{(R_A + 2R_B) \cdot C}$$

The duty cycle is:

$$D = \frac{T_H}{T_H + T_L} = \frac{R_A + R_B}{R_A + 2R_B}$$