

4-channel H-bridge type BTL driver for CD players

BA5950FP

The BA5950FP is a 4-channel H-bridge BTL power driver for CD players. Input is PWM, and gain and the filter constant can be changed with an attached resistor and capacitor.

●Applications

CD players, CD-ROM drives and other optical disc devices

●Features

- 1) 4-channel BTL driver on a HSOP 28-pin power package, allowing for application miniaturization.
- 2) Direct PWM input.
- 3) Filter constants can be changed with an attached resistor and capacitor.
- 4) Internal thermal shutdown circuit with hysteresis capabilities.
- 5) Internal mute circuit.

●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Power supply voltage	V _{cc}	18	V
Power dissipation	P _d	1800*	mW
Operating temperature	T _{opr}	−35~85	°C
Storage temperature	T _{stg}	−55~150	°C


* When mounted to a 70 × 70 × 1.6 mm glass epoxy board
Reduced by 14.4 mW for each increase in Ta of 1°C over 25°C.

●Recommended operating conditions (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Power supply voltage	V _{cc}	4.5	—	13.5	V

7828999 0018067 386

● Block diagram

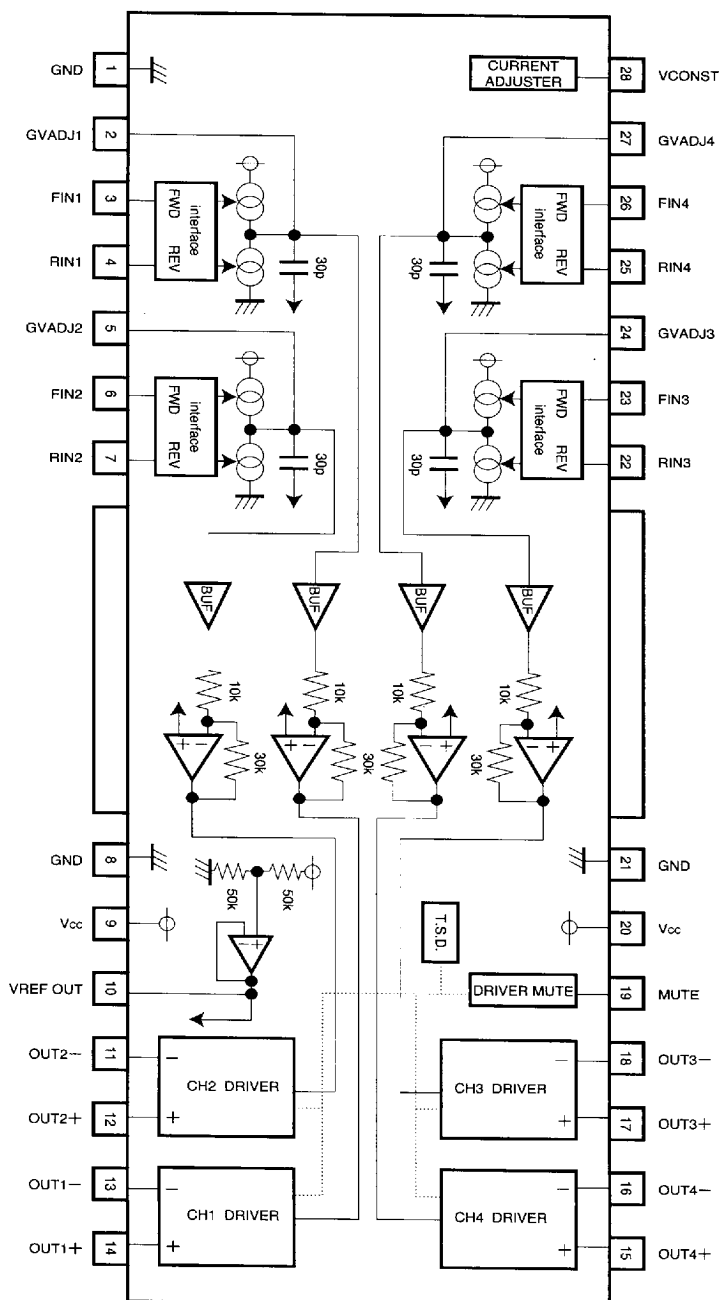

7828999 0018068 212

ROHM







405

●Pin descriptions

Pin No.	Pin name	Function
1	GND	Ground
2	GVADJ1	Channel 1 gain adjustment
3	FIN1	Channel 1 forward input
4	RIN1	Channel 1 reverse input
5	GVADJ2	Channel 2 gain adjustment
6	FIN2	Channel 2 forward input
7	RIN2	Channel 2 reverse input
8	GND	Substrate ground
9	Vcc	Vcc
10	VREF OUT	Reference voltage output
11	OUT2—	Channel 2 negative output
12	OUT2+	Channel 2 positive output
13	OUT1—	Channel 1 negative output
14	OUT1+	Channel 1 positive output
15	OUT4+	Channel 4 positive output
16	OUT4—	Channel 4 negative output
17	OUT3+	Channel 3 positive output
18	OUT3—	Channel 3 negative output
19	MUTE	Mute
20	Vcc	Vcc
21	GND	Substrate ground
22	RIN3	Channel 3 reverse input
23	FIN3	Channel 3 forward input
24	GVADJ3	Input for channel 3 gain adjustment
25	RIN4	Channel 4 reverse input
26	FIN4	Channel 4 forward input
27	GVADJ4	Input for channel 4 gain adjustment
28	VCONST	Output of constant voltage used to determine gain

■ 7828999 0018069 159 ■

● Input/output circuits

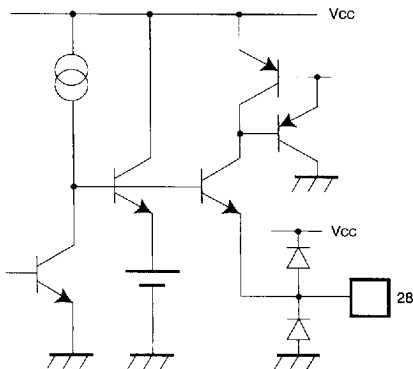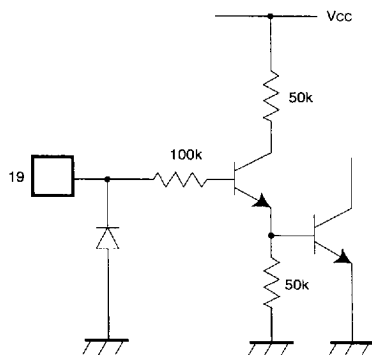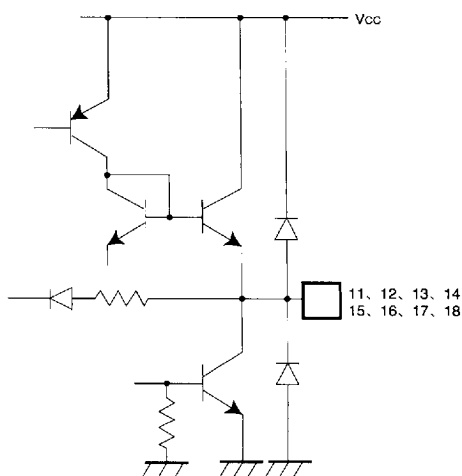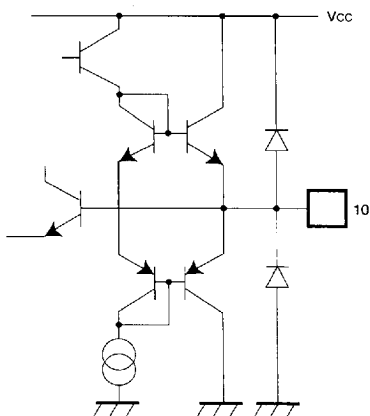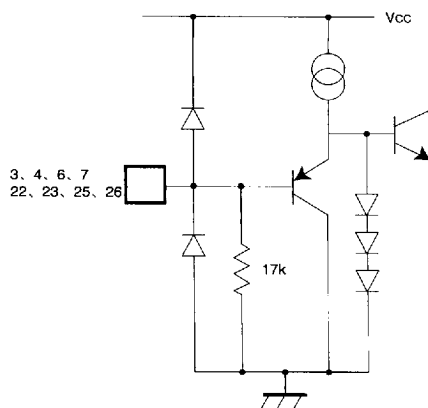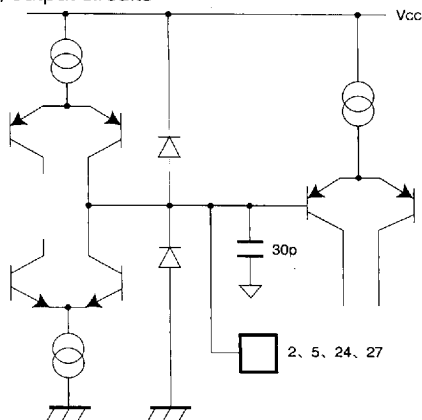

●Electrical characteristics (Unless otherwise noted, Ta=25°C, V_{CC}=8V, R_L=8Ω)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	Measurement Circuit
Quiescent current	I _Q	—	14.0	18.0	mA	No load	Fig.1
Bias voltage	V _{BIAS}	3.70	4.00	4.30	V		Fig.1
Bias voltage variation	ΔV _{BIAS}	—30	—	30	mV	1 mA, source, sink	Fig.1
Pin 28 constant voltage output	V _{CONST}	1.10	1.25	1.40	V	30kΩ to GND	Fig.1
Mute On voltage	V _{MON}	2.0	—	—	V		Fig.1
Mute Off voltage	V _{MOFF}	—	—	0.5	V		Fig.1
(Interface)							
Input voltage high level	V _{IH}	2.0	—	—	V		Fig.1
Input voltage low level	V _{IL}	—	—	0.5	V		Fig.1
Input current high level	I _{IH}	220	300	420	μA	V _{IN} =5V	Fig.1
Input current low level	I _{IL}	0	—	—10	μA	V _{IN} =0V	Fig.1
Current pulse delay time 1	Δtr	—	—	1	μs	At startup	Fig.2
Current pulse delay time 2	Δtf	—	—	1	μs	At shutdown	Fig.2
Current pulse delay time differential	Δtr-f	—200	—	200	ns		Fig.2
(Driver)							
Output offset voltage	V _{OO}	—30	—	30	mV		Fig.1
Maximum output amplitude (1)	V _{OMD1}	5.2	5.6	—	V	V _{CC} =8V	Fig.1
Maximum output amplitude (2)	V _{OMD2}	3.0	3.3	—	V	V _{CC} =5V	Fig.1
Voltage gain	G _{VD}	7.0	9.5	11.5	dB	V _{IN} =±0.5V	Fig.1
Ripple rejection	RR	—	70	—	dB	V _{IN} =100mVrms, 100Hz	Fig.1

○Not designed for radiation resistance.

7828999 0018071 807

● Measurement circuit

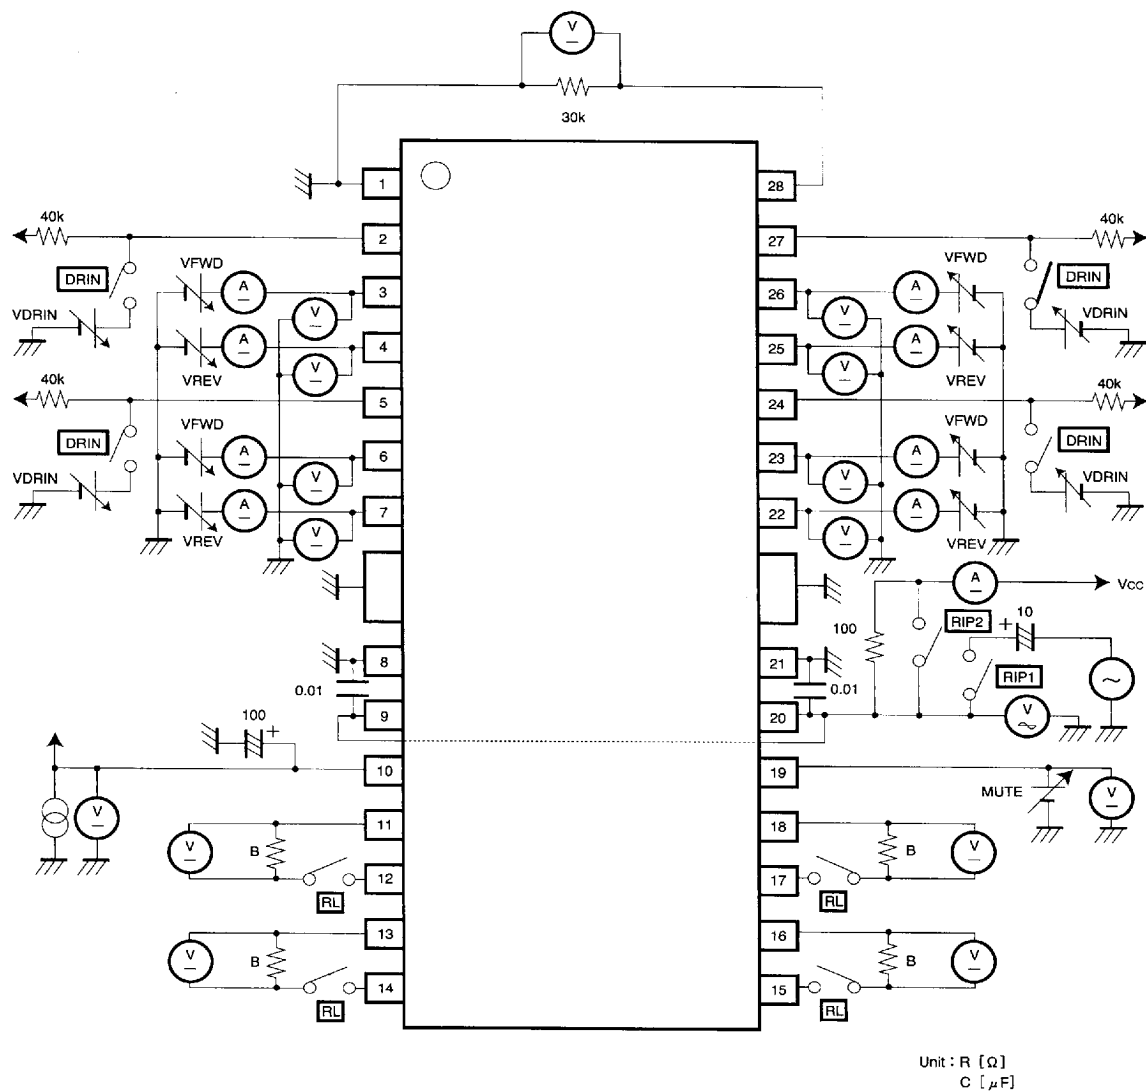


Fig. 1

7828999 0018072 743

ROHM

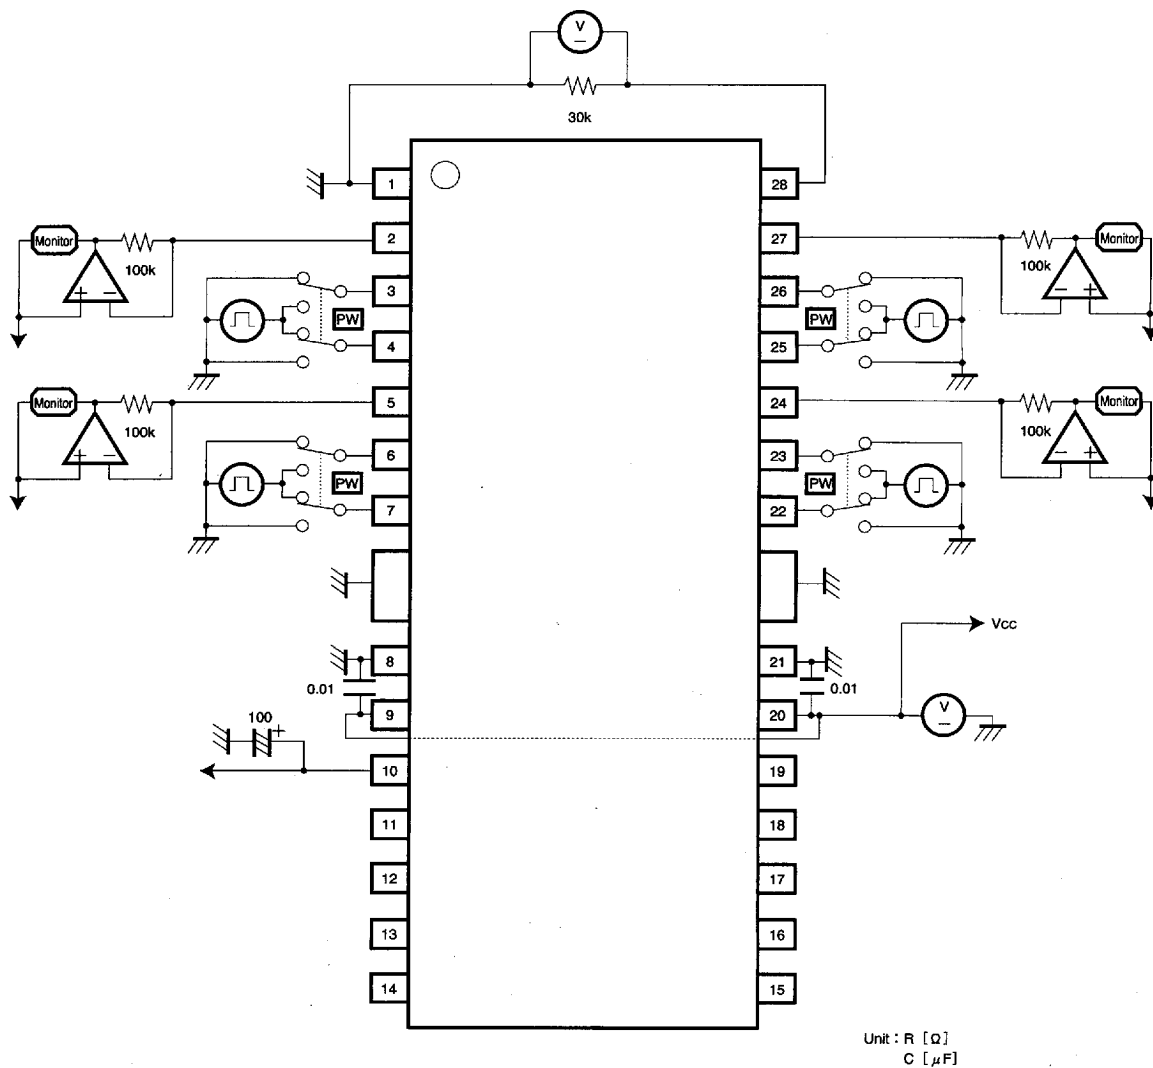


Fig. 2

7828999 0018073 68T

● Measurement circuit

Parameter	Switch				Input				Note
	RIP1	RIP2	RL	DRIN	MUTE	VDRIN	VFWD	VREV	
Quiescent current	OFF	ON	OFF	OFF	0.5V	—	0V	0V	
Bias pin voltage						—			
Bias voltage variation						—			
Pin 28 constant voltage output						—			
Mute-on voltage						2.0V	5V	0V	
Mute-off voltage	OFF	ON	OFF	OFF	0.5V	—	5V	0V	
〈Interface〉						—			
Input voltage F, high level						—	2V	0V	
Input voltage R, high level						—	0V	2V	
Input voltage F, low level						—	0.5V	0V	
Input voltage R, low level						—	0V	0.5V	
Input current, high level	OFF	ON	OFF	OFF	—	—	5V	5V	Measure the delay in the monitors observed waveform relative to the input waveform
Input current, low level						—	0V	0V	
Current pulse delay 1						—	—	—	
Current pulse delay 2						—	—	—	
Current pulse delay differential						—	—	—	
〈Driver〉	OFF	ON	ON	OFF	0.5V	—	—	—	(pin 10 voltage ± 0.5 V) *1
Output offset voltage						7V, 1V	—	—	
Maximum output amplitude 1						4V, 1V	—	—	
Maximum output amplitude 2						*1	—	—	
Voltage gain						—	—	—	
Ripple rejection	ON	OFF	—	OFF	—	—	—	—	

● Circuit operation

• Overview

Fig. 6 shows the inputs from the digital servo IC. SW1 turns on when the forward input signal is received (HIGH level, above 2.0V). SW2 turns on when the reverse input signal is received (Fig. 3). When this happens, the constant current enters resistor R_1 and the capacitor, generating an integral waveform based on the duty of the input waveform. This is increased by a factor of 3 by the driver and output (Fig. 5).

When forward or reverse input remains at the HIGH level, the DC voltage generated at point A is :

$$I \times R_1 \text{ [V]} \text{ (reverse : } -1 \times R_1 \text{ [V])}$$

This is the voltage generated relative V_{REF} . The width setting is such that the following driver buffer output is generated :

$$3I R_1 \text{ [V]} \text{ (reverse : } -3I R_1 \text{ [V]) } \textcircled{1}$$

The time constant is :

$$R_1 (C + 30p)$$

This can be changed with an attached capacitor.

Dead zone width is set by input duty ratio according to the following equation :

$$\frac{10.0 \text{ [k}\Omega\text{]} \times 1.0 \text{ [}\mu\text{A]}}{I \times R_1} \times 100 \text{ [%]} \text{ (one side) } \textcircled{2}$$

• Settings

The constant current is determined by the resistor (R_0) connected between pin 28 and pin 1 (GND).

$$I = 1.25 / R_0 \text{ [A]}$$

Consequently, equations $\textcircled{1}$ and $\textcircled{2}$ are as follows.

$$3 \times 1.25 \times \frac{R_1}{R_0} \text{ [V]} \textcircled{1'}$$

$$\frac{10.0 \text{ [k}\Omega\text{]} \times 1.0 \text{ [}\mu\text{A]}}{1.25} \times \frac{R_0}{R_1} \times 100 \text{ [%]} \textcircled{2'}$$

The ratio of R_0 and R_1 determine everything. R_0 must stay between 10k Ω and 40k Ω , R_1 below 100k Ω .

Example : When $R_0 = 30k\Omega$, $R_1 = 40k\Omega$, input HIGH level = 5V

$$\textcircled{1} \rightarrow 5V \text{ (0dB relative to input)}$$

$$\textcircled{2} \rightarrow 0.6\% \text{ (input equivalent = 30mV)}$$

7828999 0018074 516

ROHM

411

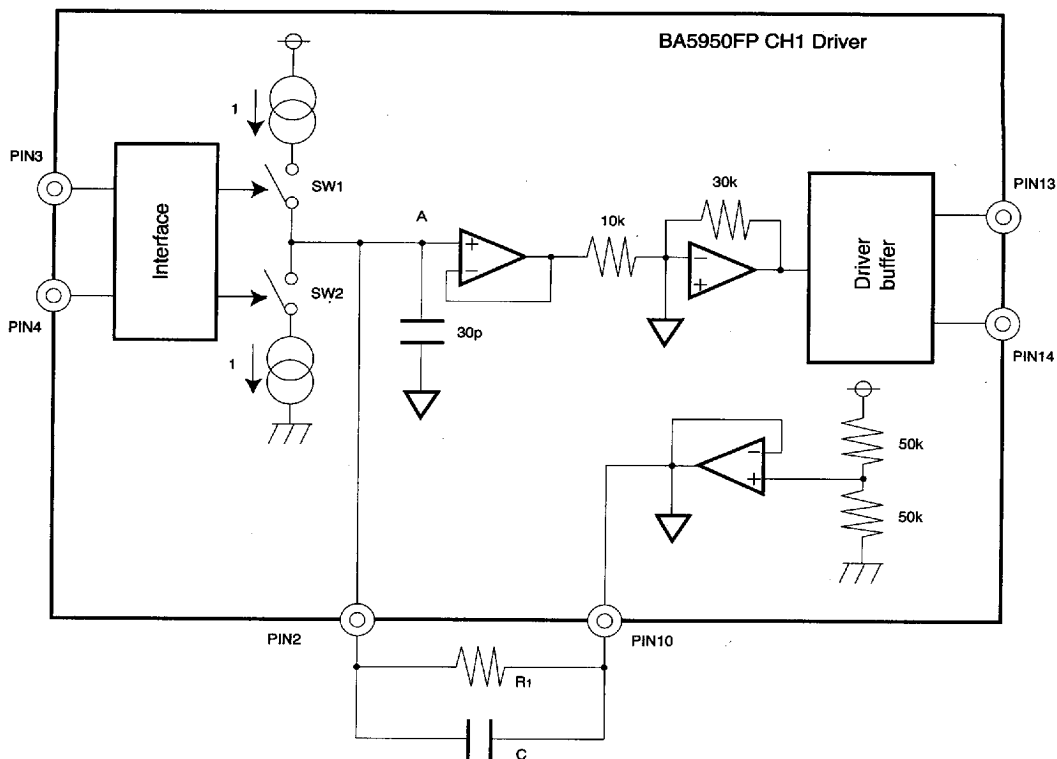


Fig. 3

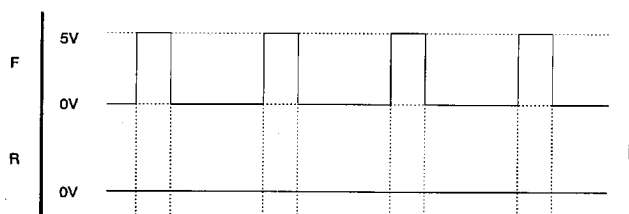


Fig. 4

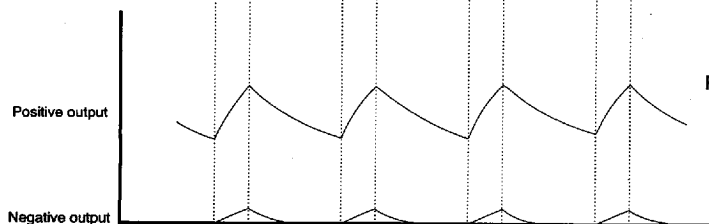


Fig. 5

7828999 0018075 452

● Application example

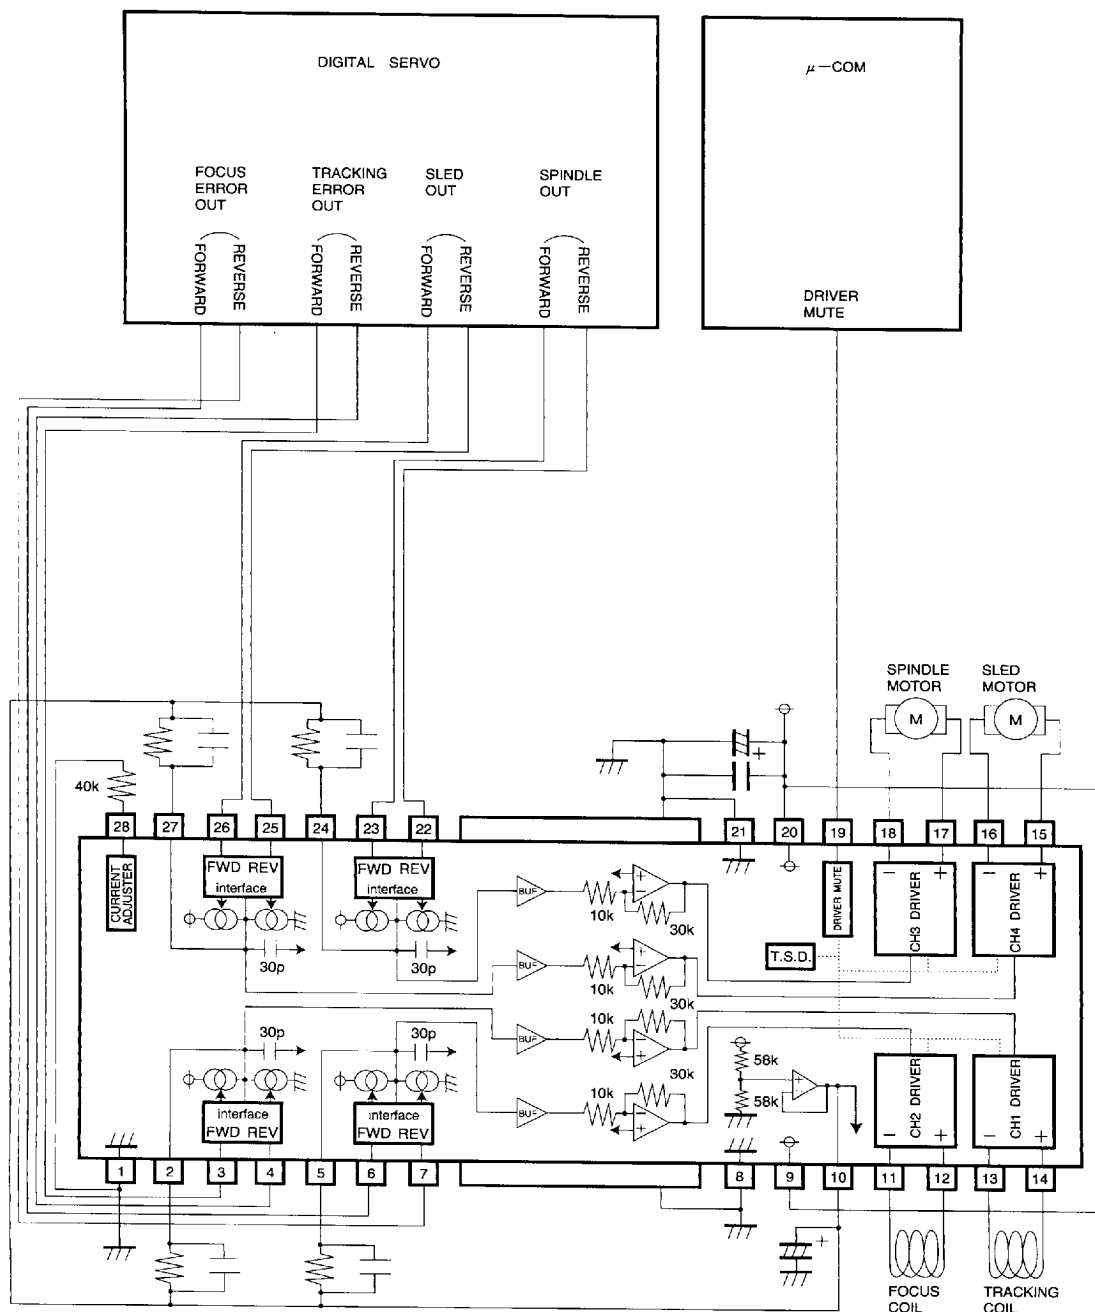


Fig. 6

7828999 0018076 399

ROHM

● Operation notes

1. The BA5950FP has an internal thermal shutdown circuit with hysteresis. Output current is muted when the chip temperature exceeds 175°C (typically) and restored when the chip temperature falls to 150°C (typically).
2. Output current can be muted by raising the mute pin (19 pin) voltage above 2.0V. The mute pin must be kept below 0.5V during normal operation.
3. All four driver output channels are muted during thermal shutdown, muting and a drop in bias pin voltage. No other components are muted.
4. Connect a stabilizing capacitor (roughly 1 μ F) to the internal reference voltage output pin (10 pin).
5. Connect the IC to a 0.1 μ F bypass capacitor to the power supply, at the base of the IC.
6. Connect the radiating fin to an external ground.

● Electrical characteristic curves

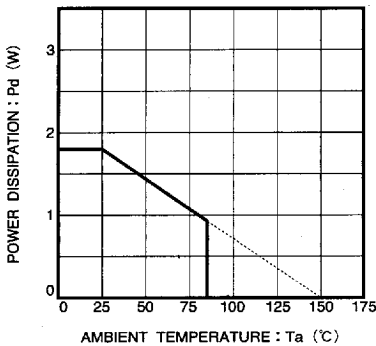


Fig. 7 Thermal derating curve

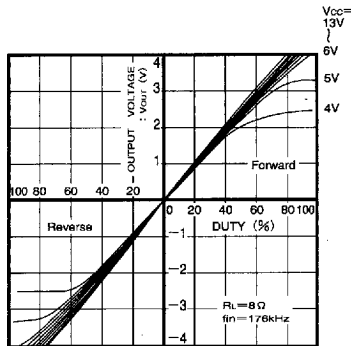


Fig. 8 Driver I/O characteristics (variable Vcc)

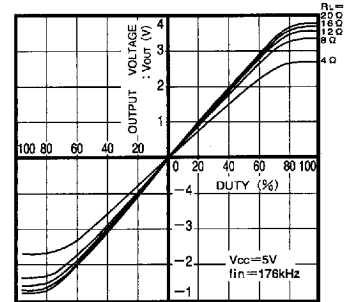


Fig. 9 Driver I/O characteristics (variable load)




Fig. 10 Driver ultralow input I/O characteristic (variable load)

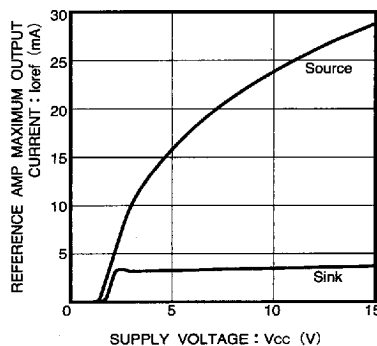


Fig. 11 Supply voltage vs. Vref amplifier output drive current

7828999 0018077 225

ROHM

● External dimensions (Units: mm)

