

## SWITCHMODE SERIES NPN SILICON POWER TRANSISTORS

The MJE13070 and MJE13071 transistors are designed for high-voltage, high-speed, power switching in inductive circuits, where fall time is critical. They are particularly suited for line-operated switchmode applications such as switching regulator's, inverters, DC -DC converter, Motor Controls, Solenoid drive and Deflection circuits.

### FEATURES:

\*Collector-Emitter Sustaining Voltage-

$$V_{CEO(SUS)} = 400 \text{ V and } 450 \text{ V}$$

\* Collector-Emitter Saturation Voltage -

$$V_{CE(sat)} = 3.0 \text{ V (Max.) @ } I_C = 5.0 \text{ A, } I_B = 1.0 \text{ A}$$


\* Switching Time -  $t_f = 0.5 \text{ us (Max.) @ } I_C = 3.0 \text{ A}$

### MAXIMUM RATINGS

Characteristic	Symbol	MJE13070	MJE13071	Unit
Collector-Emitter Voltage	$V_{CEO}$	400	450	V
Collector-Emitter Voltage	$V_{CEV}$	650	750	V
Emitter-Base Voltage	$V_{EBO}$	6		V
Collector Current - Continuous	$I_C$	5		A
- Peak	$I_{CM}$	8		
Base current	$I_B$	2		A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$	$P_D$	80		W
Derate above $25^\circ\text{C}$		0.64		W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	$T_J, T_{STG}$	-65 to +150		$^\circ\text{C}$


### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.56	$^\circ\text{C/W}$

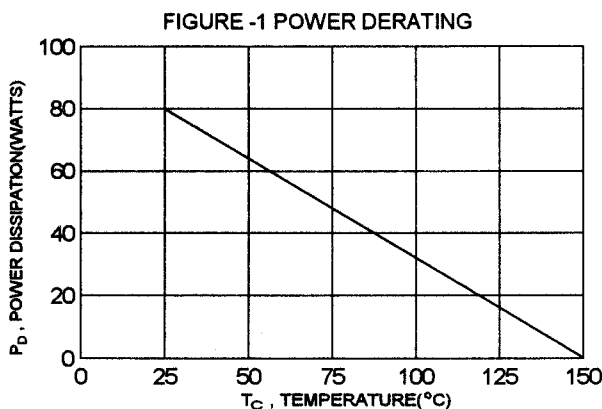


**NPN**  
**MJE13070**  
**MJE13071**

**5 AMPERE**  
**POWER**  
**TRANSISTORS**  
**400-450 VOLTS**  
**80 WATTS**



**TO-220**



PIN 1.BASE  
2.COLLECTOR  
3.EMITTER  
4.COLLECTOR(CASE)

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	15.31
B	9.78	10.42
C	5.01	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	3.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.97
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90

**ELECTRICAL CHARACTERISTICS (  $T_c = 25^\circ\text{C}$  unless otherwise noted )**

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

**OFF CHARACTERISTICS**

Collector-Emitter Sustaining Voltage ( $I_C = 100\text{ mA}$ , $I_B = 0$ ) MJE13070 MJE13071	$V_{CEO(sus)}$	400 450		V
Collector Cutoff Current ( $V_{CEV} = \text{Rated Value}$ , $V_{BE(off)} = 1.5\text{ V}$ ) ( $V_{CEV} = \text{Rated Value}$ , $V_{BE(off)} = 1.5\text{ V}$ , $T_c = 100^\circ\text{C}$ )	$I_{CEV}$		0.5 2.5	mA
Emitter Cutoff Current ( $V_{EB} = 6.0\text{ V}$ , $I_C = 0$ )	$I_{EBO}$		1.0	mA

**ON CHARACTERISTICS (1)**

DC Current Gain ( $I_C = 3.0\text{ A}$ , $V_{CE} = 5.0\text{ V}$ )	hFE	8.0		
Collector-Emitter Saturation Voltage ( $I_C = 3.0\text{ A}$ , $I_B = 0.6\text{ A}$ ) ( $I_C = 5.0\text{ A}$ , $I_B = 1.0\text{ A}$ ) ( $I_C = 3.0\text{ A}$ , $I_B = 0.6\text{ A}$ , $T_c = 100^\circ\text{C}$ )	$V_{CE(sat)}$		1.0 3.0 2.0	V
Base-Emitter Saturation Voltage ( $I_C = 3.0\text{ A}$ , $I_B = 0.6\text{ A}$ ) ( $I_C = 3.0\text{ A}$ , $I_B = 0.6\text{ A}$ , $T_c = 100^\circ\text{C}$ )	$V_{BE(sat)}$		1.5 1.5	V

**DYNAMIC CHARACTERISTICS**


Output Capacitance ( $V_{CB} = 10\text{ V}$ , $I_E = 0$ , $f = 1.0\text{ kHz}$ )	$C_{ob}$		250	pF
---	----------	--	-----	----

**SWITCHING CHARACTERISTICS**


Delay Time	$V_{CC} = 250\text{ V}$ , $I_C = 3.0\text{ A}$ $I_{B1} = 0.4\text{ A}$ , $V_{BE(off)} = 5\text{ V}$ $t_p = 30\text{ us}$ , Duty Cycle $\leq 1.0\%$	$t_d$	0.05	us
Rise Time		$t_r$	0.40	us
Storage Time		$t_s$	1.50	us
Fall Time		$t_f$	0.50	us

(1) Pulse Test: Pulse Width = 300 us, Duty Cycle  $\leq 2.0\%$


DC CURRENT GAIN

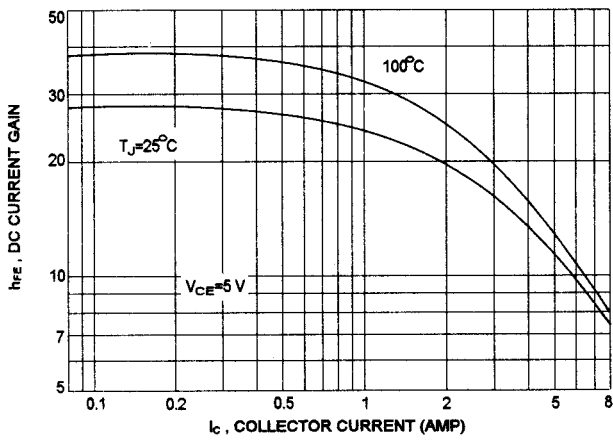


COLLECTOR SATURATION REGION

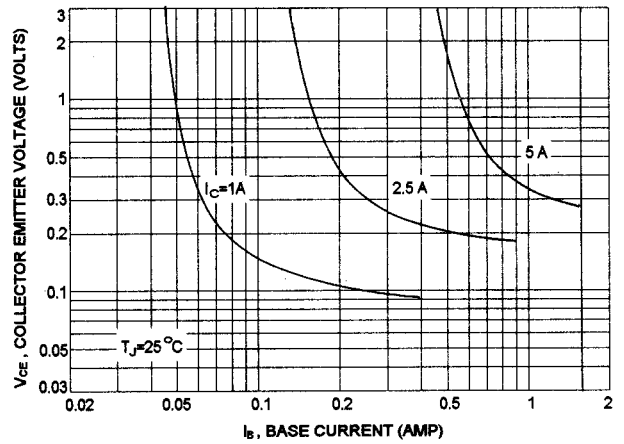


COLLECTOR-EMITTER SATURATION VOLTAGE

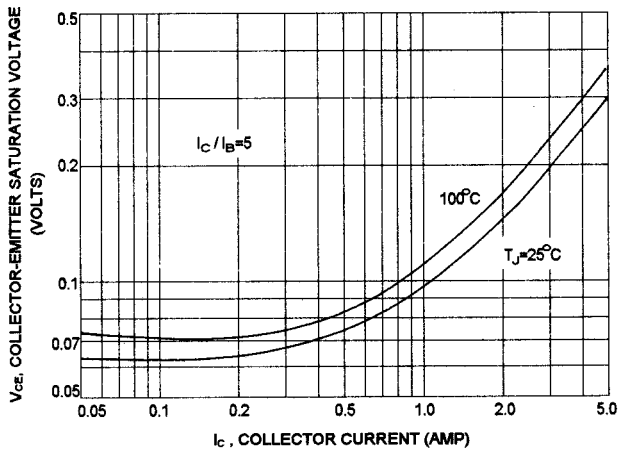


BASE-EMITTER SATURATION VOLTAGE

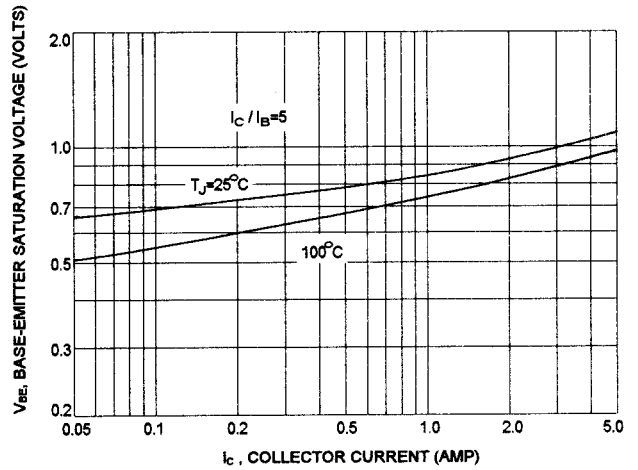


COLLECTOR CUT-OFF REGION

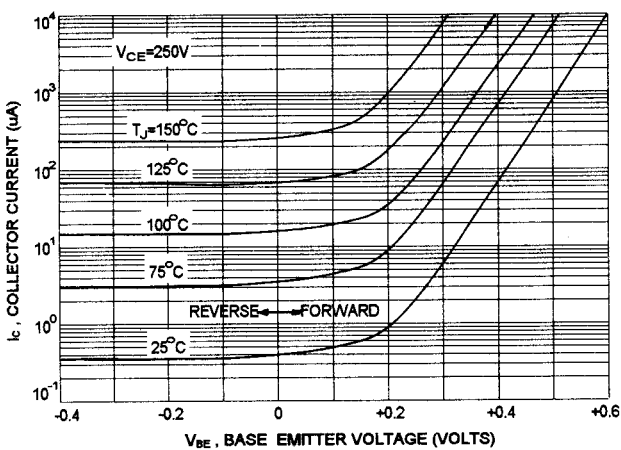


CAPACITANCE

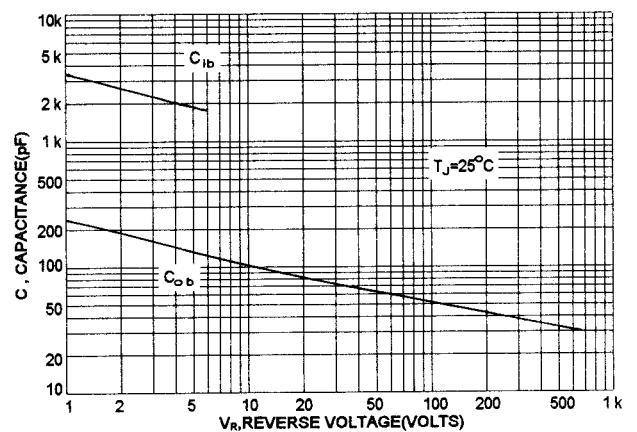


TURN-ON TIME

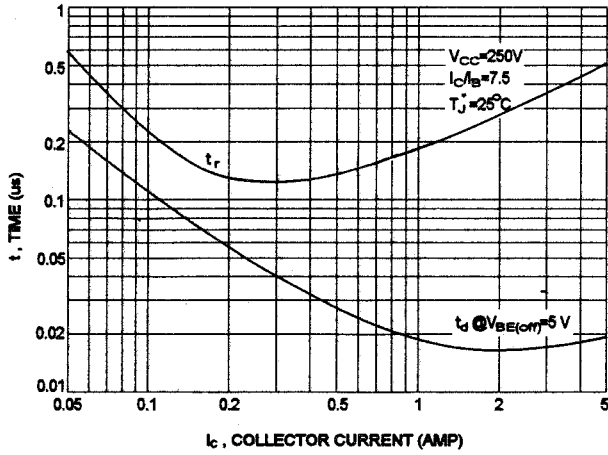

TURN-OFF TIME

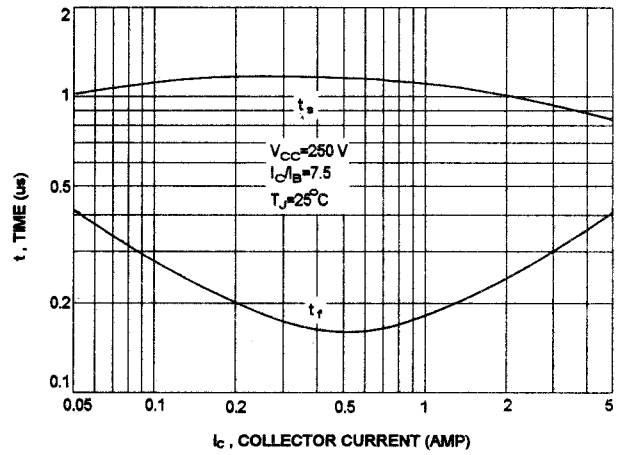

ACTIVE REGION SAFE OPERATING AREA

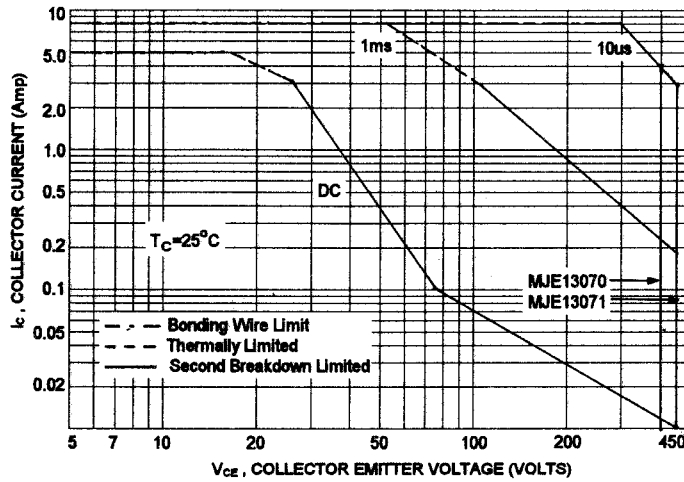

REVERSE BIAS SWITCHING SAFE OPERATING AREA

