

XP03390

Silicon NPN epitaxial planar transistor (Tr1)
Silicon PNP epitaxial planar transistor (Tr2)

For digital circuits

■ Features

- Two elements incorporated into one package
(Transistors with built-in resistor)
- Reduction of the mounting area and assembly cost by one half

■ Basic Part Number of Element

- UNR1213 (UN1213) + UNR1114 (UN1114)

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$


	Parameter	Symbol	Rating	Unit
Tr1	Collector to base voltage	V_{CBO}	50	V
	Collector to emitter voltage	V_{CEO}	50	V
	Collector current	I_C	100	mA
Tr2	Collector to base voltage	V_{CBO}	-50	V
	Collector to emitter voltage	V_{CEO}	-50	V
	Collector current	I_C	-100	mA
Total	Total power dissipation	P_T	150	mW
	Junction temperature	T_j	150	$^\circ\text{C}$
	Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

■ Electrical Characteristics $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$

- Tr1


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector to base voltage	V_{CBO}	$I_C = 10 \mu\text{A}, I_E = 0$	50			V
Collector to emitter voltage	V_{CEO}	$I_C = 2 \text{ mA}, I_B = 0$	50			V
Collector cutoff current	I_{CBO}	$V_{CB} = 50 \text{ V}, I_E = 0$			0.1	μA
	I_{CEO}	$V_{CE} = 50 \text{ V}, I_B = 0$			0.5	
Emitter cutoff current	I_{EBO}	$V_{EB} = 6 \text{ V}, I_C = 0$			0.1	mA
DC current gain	h_{FE}	$V_{CE} = 10 \text{ V}, I_C = 5 \text{ mA}$	80			
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = 10 \text{ mA}, I_B = 0.3 \text{ mA}$			0.25	V
High-level output voltage	V_{OH}	$V_{CC} = 5 \text{ V}, V_B = 0.5 \text{ V}, R_L = 1 \text{ k}\Omega$	4.9			V
Low-level output voltage	V_{OL}	$V_{CC} = 5 \text{ V}, V_B = 3.5 \text{ V}, R_L = 1 \text{ k}\Omega$			0.2	V
Input resistance	R_1		-30%	47	+30%	k Ω
Resistance ratio	R_1/R_2		0.8	1.0	1.2	
Gain bandwidth product	f_T	$V_{CB} = 10 \text{ V}, I_E = -2 \text{ mA}, f = 200\text{MHz}$		150		MHz

Note) The part number in the parenthesis shows conventional part number.

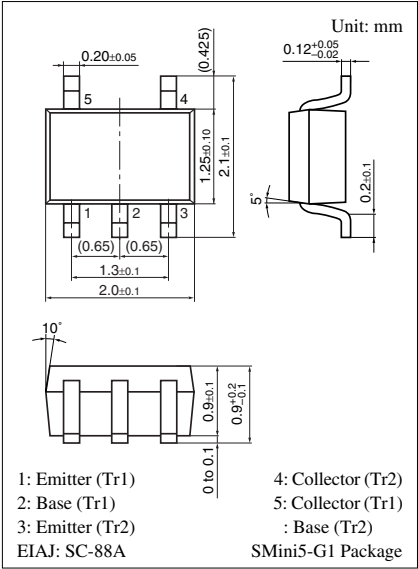

Marking Symbol: EX

Internal Connection

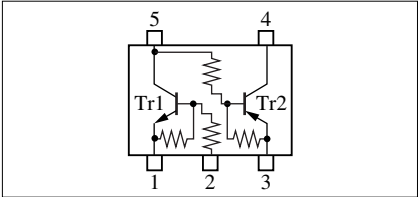


■ Electrical Characteristics (continued) $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$




• Tr2




Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector to base voltage	V_{CBO}	$I_C = -10\ \mu\text{A}$, $I_E = 0$	-50			V
Collector to emitter voltage	V_{CEO}	$I_C = -2\ \text{mA}$, $I_B = 0$	-50			V
Collector cutoff current	I_{CBO}	$V_{CB} = -50\ \text{V}$, $I_E = 0$			-0.1	μA
	I_{CEO}	$V_{CE} = -50\ \text{V}$, $I_B = 0$			-0.5	
Emitter cutoff current	I_{EBO}	$V_{EB} = -6\ \text{V}$, $I_C = 0$			-0.2	mA
DC current gain	h_{FE}	$V_{CE} = -10\ \text{V}$, $I_C = -5\ \text{mA}$	80			
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = -10\ \text{mA}$, $I_B = -0.3\ \text{mA}$			-0.25	V
High-level output voltage	V_{OH}	$V_{CC} = -5\ \text{V}$, $V_B = -0.5\ \text{V}$, $R_L = 1\ \text{k}\Omega$	-4.9			V
Low-level output voltage	V_{OL}	$V_{CC} = -5\ \text{V}$, $V_B = -2.5\ \text{V}$, $R_L = 1\ \text{k}\Omega$			-0.2	V
Input resistance	R_i		-30%	10	+30%	$\text{k}\Omega$
Resistance ratio	R_1/R_2		0.17	0.21	0.25	
Gain bandwidth product	f_T	$V_{CB} = -10\ \text{V}$, $I_E = 1\ \text{mA}$, $f = 200\text{MHz}$		80		MHz

Common characterisitcs chart






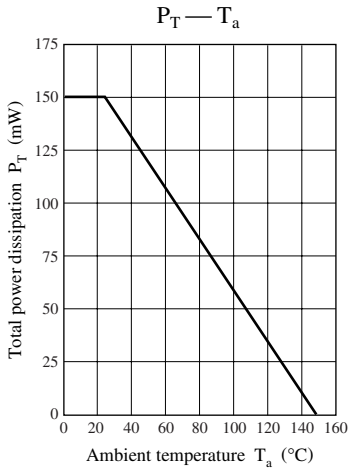


Characterisitcs chart of Tr1

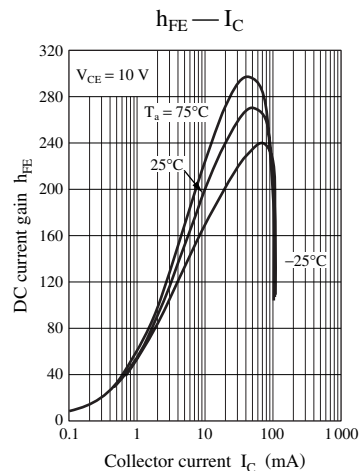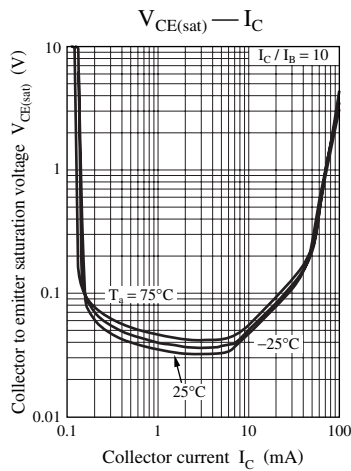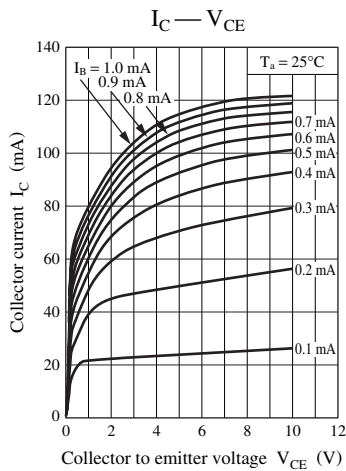

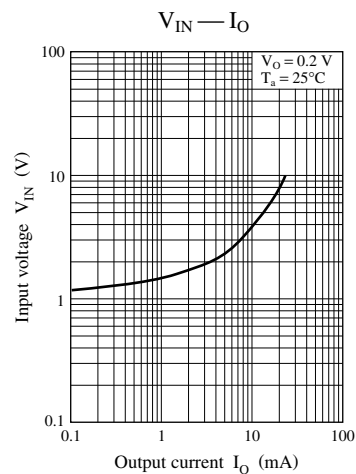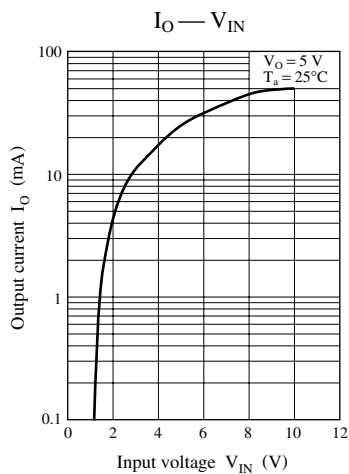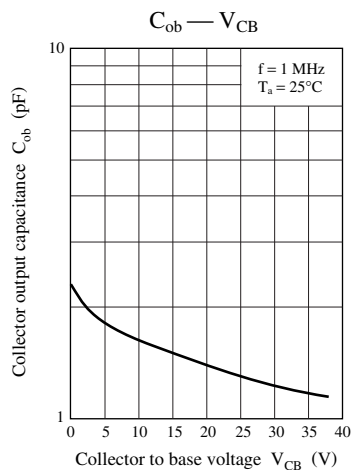

Characterisitics chart of Tr2

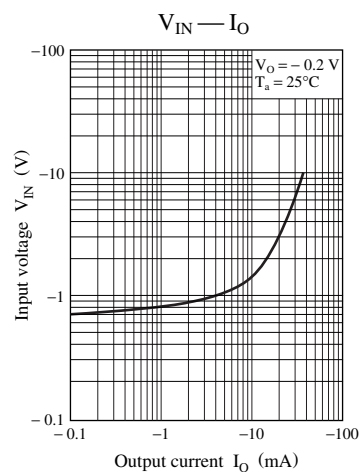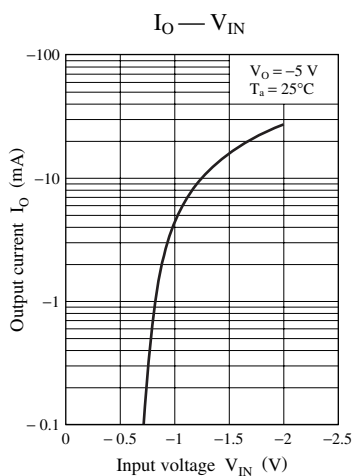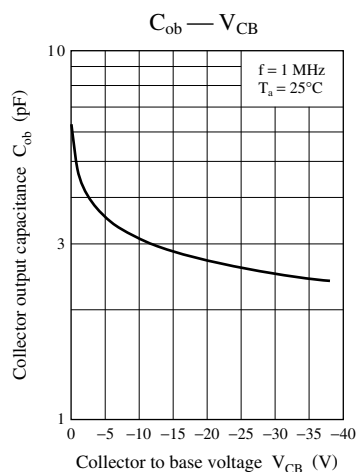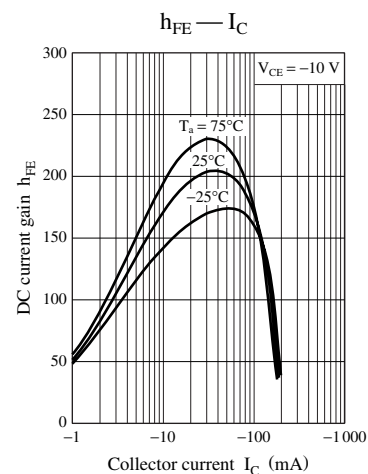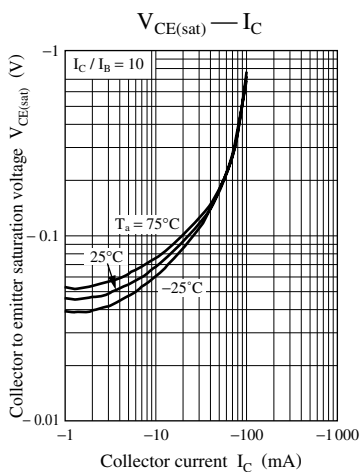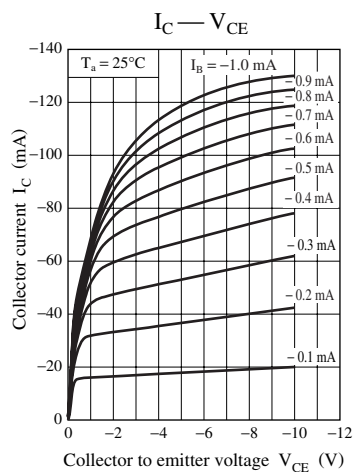

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this book and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this book is limited to showing representative characteristics and applied circuits examples of the products. It neither warrants non-infringement of intellectual property right or any other rights owned by our company or a third party, nor grants any license.
- (3) We are not liable for the infringement of rights owned by a third party arising out of the use of the product or technologies as described in this book.
- (4) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (5) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (6) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage, and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (7) When using products for which damp-proof packing is required, observe the conditions (including shelf life and amount of time let standing of unsealed items) agreed upon when specification sheets are individually exchanged.
- (8) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.