

FEATURES

- ◆ Low ripple
- ◆ Good dynamic feature
- ◆ 1KVDC Isolation
- ◆ DIP24 Package
- ◆ Temperature Range: -40°C ~ +85 °C
- ◆ UL94-V0 Package
- ◆ No Heatsink Required
- ◆ No External Component Required
- ◆ Internal SMD construction
- ◆ RoHS Compliance

MODEL SELECTION

MA^① 05^② 12^③ -X^④ D^⑤ -2W(83)^⑥

- ① Product Series
- ② Input Voltage
- ③ Output Voltage
- ④ Fixed Input
- ⑤ DIP24 Package Style
- ⑥ Rated Power (Output current)

APPLICATIONS

The MA_XD-1W & MA_XD-2W Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation $\leq \pm 5\%$);
- 2) Where isolation is necessary between input and output (isolation voltage $\leq 1000\text{VDC}$);
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

SELECTION GUIDE

Order code	Input		Output			Efficiency ¹ (% Typ)
	Voltage(VDC)		Voltage (VDC)	Current(mA)		
	Nominal	Range		Max.	Min.	
MA0512XD-1W	5	4.75-5.25	± 12	± 42	± 5	64
MA0515XD-1W	5	4.75-5.25	± 15	± 33	± 4	65
MA0509XD-2W	5	4.75-5.25	± 9	± 100	± 10	62
MA0512XD-2W	5	4.75-5.25	± 12	± 83	± 9	63
MA0515XD-2W	5	4.75-5.25	± 15	± 67	± 7	64
MA1212XD-1W	12	11.4-12.6	± 12	± 42	± 5	64
MA1215XD-1W	12	11.4-12.6	± 15	± 33	± 4	65
MA1209XD-2W	12	11.4-12.6	± 9	± 100	± 10	63
MA1212XD-2W	12	11.4-12.6	± 12	± 83	± 9	65
MA1215XD-2W	12	11.4-12.6	± 15	± 67	± 7	66
MA2412XD-1W	24	22.8-25.2	± 12	± 42	± 5	64
MA2415XD-1W	24	22.8-25.2	± 15	± 33	± 4	65
MA2409XD-2W	24	22.8-25.2	± 9	± 100	± 10	63
MA2412XD-2W	24	22.8-25.2	± 12	± 83	± 9	66
MA2415XD-2W	24	22.8-25.2	± 15	± 67	± 7	67

ISOLATION SPECIFICATIONS

Parameter	Test conditions	Min.	Typ.	Max.	Units
Storage humidity	Tested for 1 minute and 1mA max	1000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ

COMMON SPECIFICATIONS

Parameter	Test conditions	Min	Typ.	Max.	Units
Line regulation	For Vin change of $\pm 5\%$ (1W&2W)			± 0.25	%
	10% to 100% full load			± 1	%
Output voltage accuracy	100% full load			± 3	%
Temperature drift ²	100% full load			0.03	%/°C
Output ripple*	20MHz Bandwidth(1W)		10	20	mVp-p
	20MHz Bandwidth(2W)		20	40	mVp-p
Output Noise*	20MHz Bandwidth(1W&2W)		50	150	mVp-p
Switching frequency	Full load, nominal input		75		KHz

*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

Note:

1. All specifications measured at TA=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
2. See below recommended circuits for more details.



CE REACH
MICRODC reserves the copyright


COMMON SPECIFICATION

Parameter	Test conditions	Min.	Typ.	Max	Units
Storage humidity				95	%
Operating temperature		-40		85	°C
Storage temperature		-55		125	°C
Temp. rise at full load			20	30	°C
Lead temperature	1.5mm from case for 10 seconds			300	°C
Short circuit protection*				1	s
Cooling	Free air convection				
Case material	Plastic(UL94-V0)				
MTBF		3500			K hours
Weight			11		g

*Supply voltage must be discontinued at the end of short circuit duration.

Recommended circuit

If you want to further decrease the input /output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/ DC converter , see (Figure 1).

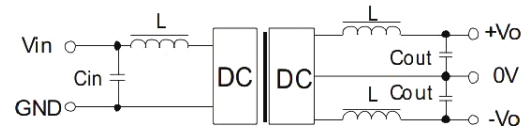

(Figure 1)

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/ DC frequency to avoid mutual interference. However , the capacitance of the out put filter capacitor must be proper .If the capacitance is too big, a startup problem might arise. For every channel of out put , provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

EXTERNAL CAPACITOR TABLE (Table 1)

Vin(VDC)	Cin(uF)	Vout(VDC)	Cout(uF)
5	4.7	±5	4.7
12	2.2	±9	2.2
24	1	±12	1
-	-	±15	0.47

It's not recommended to connect any external capacitor in the application field with less than 0.5 watt output.

Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short-circuits. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

Input Over-voltage Protection Circuit

The simplest device for input over-voltage protection is a linear voltage regulator with overheat protection that is connected to the input end in series (Figure 2).




(Figure 2)


When the environment temperature is higher than 71° C, the product output power should be less then 60% of the rated power.

No parallel connection or plug and play.

TYPICAL CHARACTERISTICS

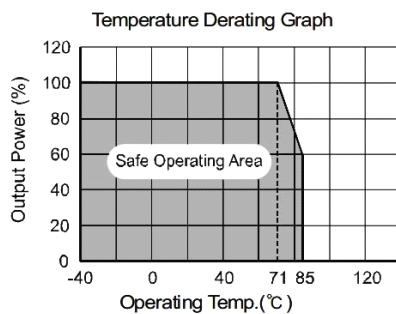


TYPICAL CHARACTERISTICS

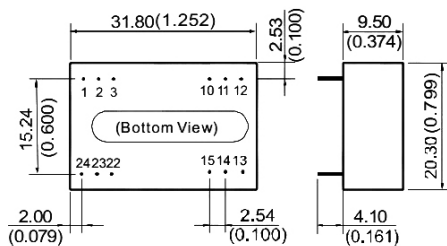

Note:
Unit:mm(inch)
Pin diameter:0.50mm (0.020inch)
Pin diameter tolerances:±0.10mm(±0.004inch)
General tolerances:±0.25mm(±0.010inch)

RECOMMENDED FOOTPRINT

Top view,grid:2.54mm(0.1inch)
diameter:1.00mm(0.039inch)



FOOTPRINT DETAILS

Pin	Duals
1,24	Vin
2,23	-Vo
3,10,15,22	0V
11,14	+Vo
12,13	GND

APPLICATION NOTE

Requirement on output load

To ensure this module can operate efficiently and reliably , During operation, the minimum output load is **not less than 10% of the full load**, and that this product should **never be operated under no load!** If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company' s products with a lower rated output power.