

MEMORY  
CMOS4 M × 4 BIT  
FAST PAGE MODE DYNAMIC RAM

## MB8116400B-50/-60

## CMOS 4,194,304 × 4 Bit Fast Page Mode Dynamic RAM

## ■ DESCRIPTION

The Fujitsu MB8116400B is a fully decoded CMOS Dynamic RAM (DRAM) that contains 16,777,216 memory cells accessible in 4-bit increments. The MB8116400B features a "fast page" mode of operation whereby high-speed random access of up to  $1,024 \times 4$  bits of data within the same row can be selected. The MB8116400B DRAM is ideally suited for mainframe, buffers, hand-held computers video imaging equipment, and other memory applications where very low power dissipation and high bandwidth are basic requirements of the design. Since the standby current of the MB8116400B is very small, the device can be used as a non-volatile memory in equipment that uses batteries for primary and/or auxiliary power.

The MB8116400B is fabricated using silicon gate CMOS and Fujitsu's advanced four-layer polysilicon and two-layer aluminum process. This process, coupled with advanced stacked capacitor memory cells, reduces the possibility of soft errors and extends the time interval between memory refreshes. Clock timing requirements for the MB8116400B are not critical and all inputs are TTL compatible.

## ■ PRODUCT LINE &amp; FEATURES


Parameter		MB8116400B-50	MB8116400B-60
RAS Access Time		50 ns max.	60 ns max.
Random Cycle Time		90 ns min.	110 ns min.
Address Access Time		25 ns max.	30 ns max.
CAS Access Time		13 ns max.	15 ns max.
Fast Page Mode Cycle Time		35 ns min.	40 ns min.
Low Power Dissipation	Operating Current	495 mW max.	412.5 mW max.
	Standby Current	11 mW max. (TTL level)/5.5 mW max. (CMOS level)	

- 4,194,304 words × 4 bits organization
- Silicon gate, CMOS, Advanced Stacked Capacitor Cell
- All input and output are TTL compatible
- 4096 refresh cycles every 65.6 ms
- Early write or  $\overline{OE}$  controlled write capability
- RAS only, CAS-before-RAS, or Hidden Refresh
- Fast page mode, Read-Modify-Write capability
- On chip substrate bias generator for high performance

# MB8116400B-50/-60


## ■ PACKAGE

Plastic SOJ Package



(LCC-26P-M09)

Plastic TSOP (II) Package




(FPT-26P-M05)  
(Normal Bend)

### Package and Ordering Information

- 26-pin plastic (300 mil.) SOJ, order as MB8116400B-xxPJ
- 26-pin plastic (300 mil.) TSOP-II with normal bend leads, order as MB8116400B-xxPFTN

# MB8116400B-50/-60


## ■ PIN ASSIGNMENTS AND DESCRIPTIONS

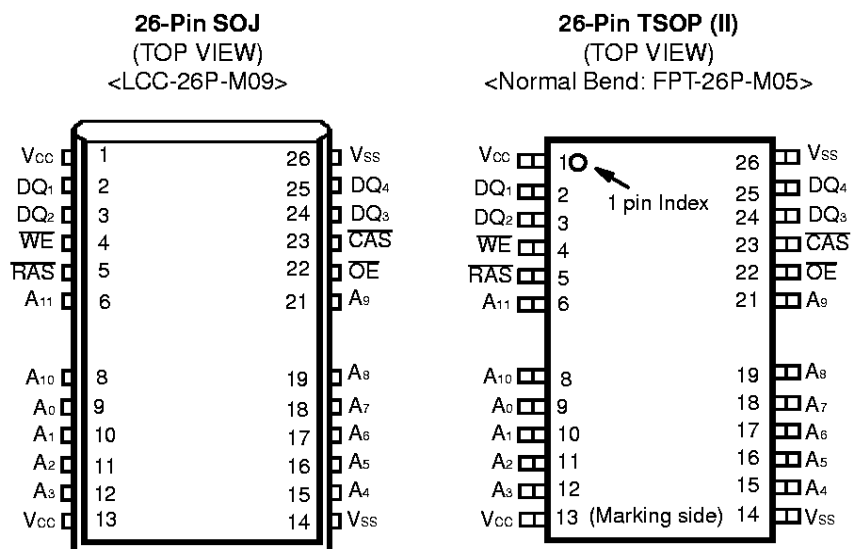

Designator	Function
DQ <sub>1</sub> to DQ <sub>4</sub>	Data Input/Output
WE	Write enable.
RAS	Row address strobe.
A <sub>0</sub> to A <sub>11</sub>	Address inputs.
V <sub>CC</sub>	+5 volt power supply.
OE	Output enable.
CAS	Column address strobe.
V <sub>SS</sub>	Circuit ground.

# MB8116400B-50/-60

Fig. 1 - MB8116400B DYNAMIC RAM - BLOCK DIAGRAM

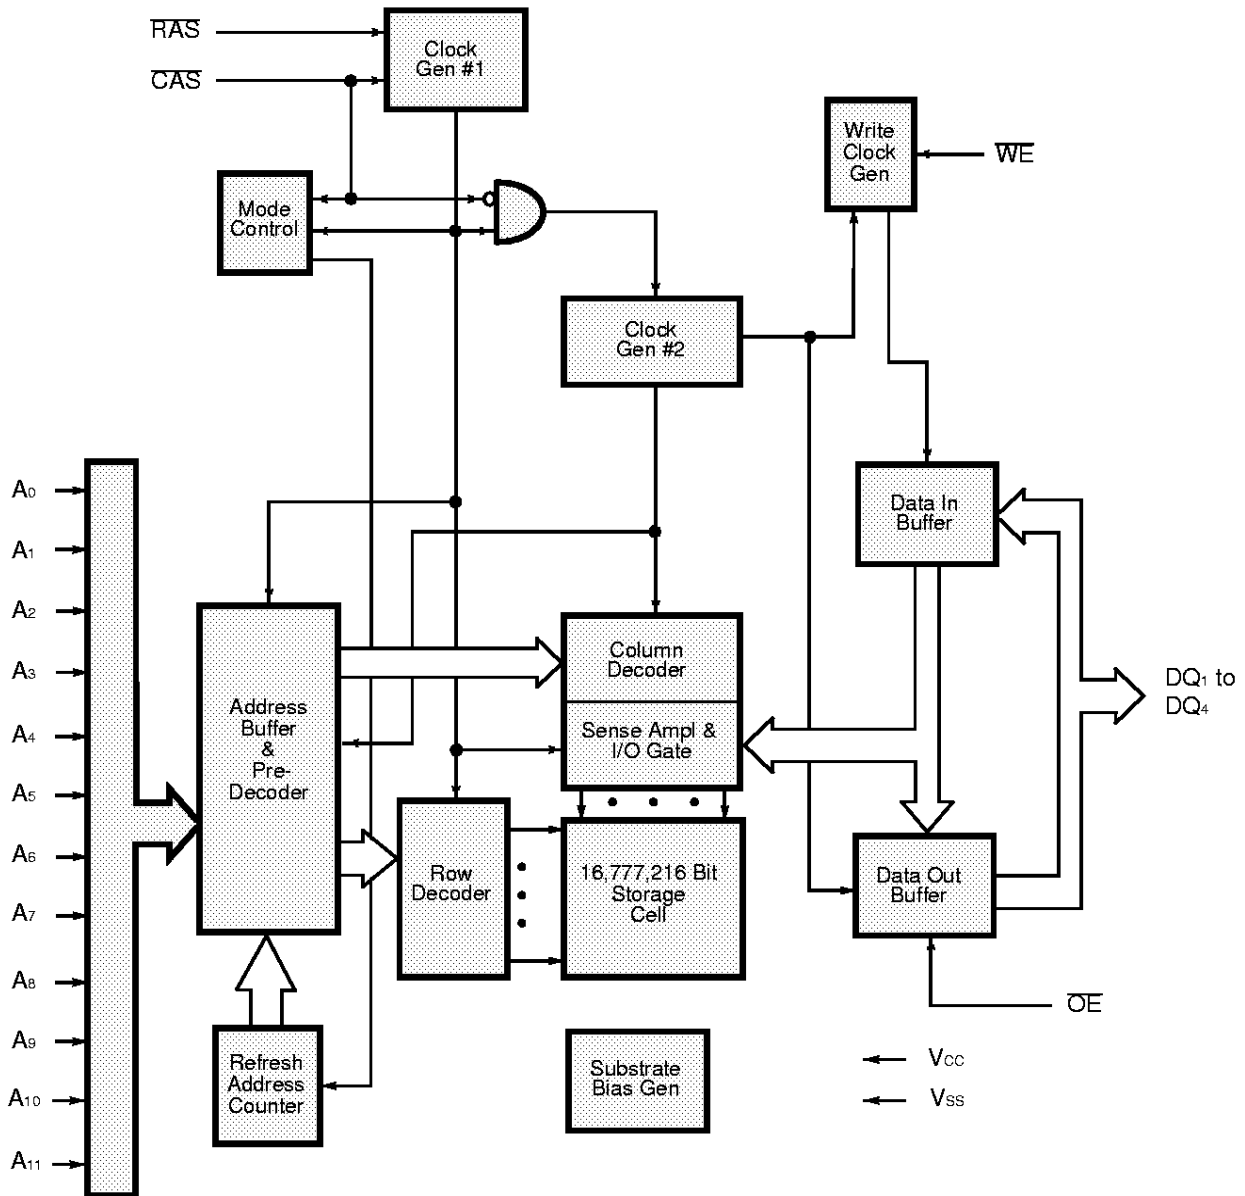

# MB8116400B-50/-60

## FUNCTIONAL TRUTH TABLE

Operation Mode	Clock Input				Address Input		Input Data		Refresh	Note
	RAS	CAS	WE	OE	Row	Column	Input	Output		
Standby	H	H	X	X	—	—	—	High-Z	—	
Read Cycle	L	L	H	L	Valid	Valid	—	Valid	Yes*	$t_{RCS} \geq t_{RCS}(\text{min})$
Write Cycle (Early Write)	L	L	L	X	Valid	Valid	Valid	High-Z	Yes*	$t_{WCS} \geq t_{WCS}(\text{min})$
Read-Modify- Write Cycle	L	L	H→L	L→H	Valid	Valid	Valid	Valid	Yes*	
RAS-only Refresh Cycle	L	H	X	X	Valid	X	—	High-Z	Yes	
CAS-before-RAS Refresh Cycle	L	L	H	X	X	X	—	High-Z	Yes	$t_{CSR} \geq t_{CSR}(\text{min})$
Hidden Refresh Cycle	H→L	L	H→X	L	X	X	—	Valid	Yes	Previous data is kept.

X : “H” or “L”

\* : It is impossible in Fast Page Mode.

## FUNCTIONAL OPERATION

### ADDRESS INPUTS

Twenty-two input bits are required to decode any four of 16,777,216 cell addresses in the memory matrix. Since only twelve address bits ( $A_0$  to  $A_{11}$ ) are available, the row and column inputs are separately strobed by RAS and CAS as shown in Figure 1. First, twelve row address bits are input on pins  $A_0$ -through- $A_{11}$  and latched with the row address strobe (RAS) then, ten column address bits are input and latched with the column address strobe (CAS). Both row and column addresses must be stable on or before the falling edge of RAS and CAS, respectively. The address latches are of the flow-through type; thus, address information appearing after  $t_{RAH}(\text{min}) + t_T$  is automatically treated as the column address.

### WRITE ENABLE

The read or write mode is determined by the logic state of WE. When WE is active Low, a write cycle is initiated; when WE is High, a read cycle is selected. During the read mode, input data is ignored.

### DATA INPUTS

Input data is written into memory in either of three basic ways—an early write cycle, an  $\overline{OE}$  (delayed) write cycle, and a read-modify-write cycle. The falling edge of WE or CAS, whichever is later, serves as the input data-latch strobe. In an early write cycle, the input data ( $DQ_1$  to  $DQ_4$ ) is strobed by CAS and the setup/hold times are referenced to CAS because WE goes Low before CAS. In a delayed write or a read-modify-write cycle, WE goes Low after CAS; thus, input data is strobed by WE and all setup/hold times are referenced to the write-enable signal.

# MB8116400B-50/-60

## DATA OUTPUTS

The three-state buffers are TTL compatible with a fanout of two TTL loads. Polarity of the output data is identical to that of the input; the output buffers remain in the high-impedance state until the column address strobe goes Low. When a read or read-modify-write cycle is executed, valid outputs are obtained under the following conditions:

- t<sub>RAC</sub>** : from the falling edge of  $\overline{RAS}$  when t<sub>RCD</sub> (max) is satisfied.
- t<sub>CAC</sub>** : from the falling edge of  $\overline{CAS}$  when t<sub>RCD</sub> is greater than t<sub>RCD</sub> (max).
- t<sub>AA</sub>** : from column address input when t<sub>RAD</sub> is greater than t<sub>RAD</sub> (max).
- t<sub>OE</sub>** : from the falling edge of  $\overline{OE}$  when  $\overline{OE}$  is brought Low after t<sub>RAC</sub>, t<sub>CAC</sub>, or t<sub>AA</sub>.

The data remains valid until either  $\overline{CAS}$  or  $\overline{OE}$  returns to a High logic level. When an early write is executed, the output buffers remain in a high-impedance state during the entire cycle.

## FAST PAGE MODE OF OPERATION

The fast page mode of operation provides faster memory access and lower power dissipation. The fast page mode is implemented by keeping the same row address and strobing in successive column addresses. To satisfy these conditions,  $\overline{RAS}$  is held Low for all contiguous memory cycles in which row addresses are common. For each fast page of memory, any of  $1,024 \times 4$  bits can be accessed and, when multiple MB8116400Bs are used,  $\overline{CAS}$  is decoded to select the desired memory fast page. Fast page mode operations need not be addressed sequentially and combinations of read, write, and/or read-modify-write cycles are permitted.

# MB8116400B-50/-60

## ■ ABSOLUTE MAXIMUM RATINGS (See WARNING)

Parameter	Symbol	Value	Unit
Voltage at Any Pin Relative to V <sub>SS</sub>	V <sub>IN</sub> , V <sub>OUT</sub>	−0.5 to +7	V
Voltage of V <sub>CC</sub> Supply Relative to V <sub>SS</sub>	V <sub>CC</sub>	−0.5 to +7	V
Power Dissipation	PD	1.0	W
Short Circuit Output Current	—	−50 to +50	mA
Operating Temperature	T <sub>OP</sub>	0 to 70	°C
Storage Temperature	T <sub>STG</sub>	−55 to +125	°C

**WARNING:** Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum rating conditions. Do not exceed these ratings.

## ■ RECOMMENDED OPERATING CONDITIONS

Parameter	Notes	Symbol	Min.	Typ.	Max.	Unit	Ambient Operating Temp.
Supply Voltage	*1	V <sub>CC</sub>	4.5	5.0	5.5	V	0°C to +70°C
		V <sub>SS</sub>	0	0	0		
Input High Voltage, All Inputs	*1	V <sub>IH</sub>	2.4	—	6.5	V	
Input Low Voltage, All Inputs/outputs*	*1	V <sub>IL</sub>	−0.3	—	0.8	V	

\* : Undershoots of up to −2.0 volts with a pulse width not exceeding 20 ns are acceptable.

**WARNING:** Recommended operating conditions are normal operating ranges for the semiconductor device. All the device's electrical characteristics are warranted when operated within these ranges.

Always use semiconductor devices within the recommended operating conditions. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their FUJITSU representative beforehand.

## ■ CAPACITANCE

(T<sub>A</sub> = 25°C, f = 1 MHz)

Parameter	Symbol	Typ.	Max.	Unit
Input Capacitance, A <sub>0</sub> to A <sub>11</sub>	C <sub>IN1</sub>	—	5	pF
Input Capacitance, RAS, CAS, WE, OE	C <sub>IN2</sub>	—	5	pF
Input/Output Capacitance, DQ <sub>1</sub> to DQ <sub>4</sub>	C <sub>DQ</sub>	—	7	pF

# MB8116400B-50/-60

## ■ DC CHARACTERISTICS

(At recommended operating conditions unless otherwise noted.)

Note 3

Parameter	Notes	Symbol	Condition	Values			Unit
				Min.	Typ.	Max.	
Output High Voltage	*1	$V_{OH}$	$I_{OH} = -5.0 \text{ mA}$	2.4	—	—	V
Output Low Voltage	*1	$V_{OL}$	$I_{OL} = 4.2 \text{ mA}$	—	—	0.4	
Input Leakage Current (Any Input)		$I_{I(L)}$	$0 \text{ V} \leq V_{IN} \leq V_{CC}$ ; $4.5 \text{ V} \leq V_{CC} \leq 5.5 \text{ V}$ ; $V_{SS} = 0 \text{ V}$ ; All other pins under test = 0 V	-10	—	10	$\mu\text{A}$
Output Leakage Current		$I_{O(L)}$	$0 \text{ V} \leq V_{OUT} \leq V_{CC}$ ; $4.5 \text{ V} \leq V_{CC} \leq 5.5 \text{ V}$ ; Data out disabled	-10	—	10	
Operating Current (Average Power Supply Current)	*2	MB8116400B-50	$RAS$ & $CAS$ cycling; $t_{RC} = \min$	—	—	90	mA
		MB8116400B-60				75	
Standby Current (Power Supply Current)	*2	TTL level	$RAS = \overline{CAS} = V_{IH}$	—	—	2.0	mA
		CMOS level	$RAS = \overline{CAS} \geq V_{CC} - 0.2 \text{ V}$			1.0	
Refresh Current #1 (Average Power Supply Current)	*2	MB8116400B-50	$CAS = V_{IH}$ , $RAS$ cycling; $t_{RC} = \min$	—	—	90	mA
		MB8116400B-60				75	
Fast Page Mode Current	*2	MB8116400B-50	$RAS = V_{IL}$ , $\overline{CAS}$ cycling; $t_{RC} = \min$	—	—	80	mA
		MB8116400B-60				70	
Refresh Current #2 (Average Power Supply Current)	*2	MB8116400B-50	$RAS$ cycling; $\overline{CAS}$ -before- $RAS$ ; $t_{RC} = \min$	—	—	90	mA
		MB8116400B-60				75	



# MB8116400B-50/-60

## ■ AC CHARACTERISTICS

(At recommended operating conditions unless otherwise noted.)

Notes 3, 4, 5

No.	Parameter	Notes	Symbol	MB8116400B-50		MB8116400B-60		Unit
				Min.	Max.	Min.	Max.	
1	Time between Refresh		t <sub>REF</sub>	—	65.6	—	65.6	ms
2	Random Read/Write Cycle Time		t <sub>RC</sub>	90	—	110	—	ns
3	Read-Modify-Write Cycle Time		t <sub>RWC</sub>	126	—	150	—	ns
4	Access Time from <b>RAS</b>	*6,9	t <sub>RAC</sub>	—	50	—	60	ns
5	Access Time from <b>CAS</b>	*7,9	t <sub>CAC</sub>	—	13	—	15	ns
6	Column Address Access Time	*8,9	t <sub>AA</sub>	—	25	—	30	ns
7	Output Hold Time		t <sub>OH</sub>	3	—	3	—	ns
8	Output Buffer Turn On Delay Time		t <sub>ON</sub>	0	—	0	—	ns
9	Output Buffer Turn off Delay Time	*10	t <sub>OFF</sub>	—	13	—	15	ns
10	Transition Time		t <sub>T</sub>	3	50	3	50	ns
11	<b>RAS</b> Precharge Time		t <sub>RP</sub>	30	—	40	—	ns
12	<b>RAS</b> Pulse Width		t <sub>RAS</sub>	50	100000	60	100000	ns
13	<b>RAS</b> Hold Time		t <sub>RSH</sub>	13	—	15	—	ns
14	<b>CAS</b> to <b>RAS</b> Precharge Time		t <sub>CRP</sub>	5	—	5	—	ns
15	<b>RAS</b> to <b>CAS</b> Delay Time	*11,12	t <sub>RCD</sub>	17	37	20	45	ns
16	<b>CAS</b> Pulse Width		t <sub>CAS</sub>	13	—	15	—	ns
17	<b>CAS</b> Hold Time		t <sub>CSH</sub>	50	—	60	—	ns
18	<b>CAS</b> Precharge Time (Normal)	*19	t <sub>CPN</sub>	7	—	10	—	ns
19	Row Address Setup Time		t <sub>ASR</sub>	0	—	0	—	ns
20	Row Address Hold Time		t <sub>RAH</sub>	7	—	10	—	ns
21	Column Address Setup Time		t <sub>ASC</sub>	0	—	0	—	ns
22	Column Address Hold Time		t <sub>CAH</sub>	7	—	10	—	ns
23	Column Address Hold Time from <b>RAS</b>		t <sub>AR</sub>	24	—	30	—	ns
24	<b>RAS</b> to Column Address Delay Time	*13	t <sub>RAD</sub>	12	25	15	30	ns
25	Column Address to <b>RAS</b> Lead Time		t <sub>RAL</sub>	25	—	30	—	ns
26	Column Address to <b>CAS</b> Lead Time		t <sub>CAL</sub>	25	—	30	—	ns
27	Read Command and Setup Time		t <sub>RCS</sub>	0	—	0	—	ns
28	Read Command Hold Time Referenced to <b>RAS</b>	*14	t <sub>RRH</sub>	0	—	0	—	ns
29	Read Command Hold Time Referenced to <b>CAS</b>	*14	t <sub>RCH</sub>	0	—	0	—	ns
30	Write Command Setup Time	*15,20	t <sub>WCS</sub>	0	—	0	—	ns
31	Write Command Hold Time		t <sub>WCH</sub>	7	—	10	—	ns
32	Write Command Hold Time from <b>RAS</b>		t <sub>WCR</sub>	24	—	30	—	ns

(Continued)

# MB8116400B-50/-60

(Continued)


No.	Parameter	Notes	Symbol	MB8116400B-50		MB8116400B-60		Unit
				Min.	Max.	Min.	Max.	
33	WE Pulse Width		tWP	7	—	10	—	ns
34	Write Command to RAS Lead Time		tRWL	13	—	15	—	ns
35	Write Command to CAS Lead Time		tCWL	13	—	15	—	ns
36	DIN Setup Time		tDS	0	—	0	—	ns
37	DIN Hold Time		tDH	7	—	10	—	ns
38	Data Hold Time from RAS		tDHR	24	—	30	—	ns
39	RAS to WE Delay Time	*20	tRWD	68	—	80	—	ns
40	CAS to WE Delay Time	*20	tCWD	31	—	35	—	ns
41	Column Address to WE Delay Time	*20	tAWD	43	—	50	—	ns
42	RAS Precharge Time to CAS Active Time (Refresh cycles)		tRPC	5	—	5	—	ns
43	CAS Setup Time for CAS-before-RAS Refresh		tCSR	0	—	0	—	ns
44	CAS Hold Time for CAS-before-RAS Refresh		tCHR	10	—	10	—	ns
45	WE Setup Time from RAS		tWSR	0	—	0	—	ns
46	WE Hold Time from RAS		tWHR	10	—	10	—	ns
47	Access Time from OE	*9	tOEA	—	13	—	15	ns
48	Output Buffer Turn Off Delay from OE	*10	tOEZ	—	13	—	15	ns
49	OE to RAS Lead Time for Valid Data		tOEL	5	—	5	—	ns
50	OE Hold Time Referenced to WE	*16	tOEH	5	—	5	—	ns
51	OE to Data In Delay Time		tOED	13	—	15	—	ns
52	CAS to Data In Delay Time		tCDD	13	—	15	—	ns
53	DIN to CAS Delay Time	*17	tDZC	0	—	0	—	ns
54	DIN to OE Delay Time	*17	tDZO	0	—	0	—	ns
55	Fast Page Mode RAS Pulse Width		tRASP	—	100000	—	100000	ns
60	Fast Page Mode Read/Write Cycle Time		tPC	35	—	40	—	ns
61	Fast Page Mode Read-Modify-Write Cycle Time		tPRWC	71	—	80	—	ns
62	Access Time from CAS Precharge	*9,18	tCPA	—	30	—	35	ns
63	Fast Page Mode CAS Precharge Time		tCP	7	—	10	—	ns
64	Fast Page Mode RAS Hold Time from CAS Precharge		tRHCP	30	—	35	—	ns
65	Fast Page Mode CAS Precharge to WE Delay Time	*20	tCPWD	48	—	55	—	ns

# MB8116400B-50/-60


- Notes:**
- \*1. Referenced to  $V_{SS}$ .
  - \*2.  $I_{CC}$  depends on the output load conditions and cycle rates; the specified values are obtained with the output open.  $I_{CC}$  depends on the number of address change as  $RAS = V_{IL}$ ,  $CAS = V_{IH}$  and  $V_{IL} > -0.3$  V.  $I_{CC1}$ ,  $I_{CC3}$ ,  $I_{CC4}$  and  $I_{CC5}$  are specified at one time of address change during  $RAS = V_{IL}$  and  $CAS = V_{IH}$ .  $I_{CC2}$  is specified during  $RAS = V_{IH}$  and  $V_{IL} > -0.3$  V.
  - \*3. An initial pause ( $RAS = CAS = V_{IH}$ ) of 200  $\mu s$  is required after power-up followed by any eight  $RAS$ -only cycles before proper device operation is achieved. In case of using internal refresh counter, a minimum of eight  $CAS$ -before- $RAS$  initialization cycles instead of 8  $RAS$  cycles are required.
  - \*4. AC characteristics assume  $t_T = 5$  ns.
  - \*5.  $V_{IH}$  (min) and  $V_{IL}$  (max) are reference levels for measuring timing of input signals. Also transition times are measured between  $V_{IH}$  (min) and  $V_{IL}$  (max).
  - \*6. Assumes that  $t_{RCD} \leq t_{RCD}(\max)$ ,  $t_{RAD} \leq t_{RAD}(\max)$ . If  $t_{RCD}$  is greater than the maximum recommended value shown in this table,  $t_{RAC}$  will be increased by the amount that  $t_{RCD}$  exceeds the value shown. Refer to Fig. 2 and 3.
  - \*7. If  $t_{RCD} \geq t_{RCD}(\max)$ ,  $t_{RAD} \geq t_{RAD}(\max)$ , and  $t_{ASC} \geq t_{AA} - t_{CAC} - t_T$ , access time is  $t_{CAC}$ .
  - \*8. If  $t_{RAD} \geq t_{RAD}(\max)$  and  $t_{ASC} \leq t_{AA} - t_{CAC} - t_T$ , access time is  $t_{AA}$ .
  - \*9. Measured with a load equivalent to two TTL loads and 100 pF.
  - \*10.  $t_{OFF}$  and  $t_{OEZ}$  is specified that output buffer change to high-impedance state.
  - \*11. Operation within the  $t_{RCD}(\max)$  limit ensures that  $t_{RAC}(\max)$  can be met.  $t_{RCD}(\max)$  is specified as a reference point only; if  $t_{RCD}$  is greater than the specified  $t_{RCD}(\max)$  limit, access time is controlled exclusively by  $t_{CAC}$  or  $t_{AA}$ .
  - \*12.  $t_{RCD}(\min) = t_{RAH}(\min) + 2 t_T + t_{ASC}(\min)$ .
  - \*13. Operation within the  $t_{RAD}(\max)$  limit ensures that  $t_{RAC}(\max)$  can be met.  $t_{RAD}(\max)$  is specified as a reference point only; if  $t_{RAD}$  is greater than the specified  $t_{RAD}(\max)$  limit, access time is controlled exclusively by  $t_{CAC}$  or  $t_{AA}$ .
  - \*14. Either  $t_{RRH}$  or  $t_{RCH}$  must be satisfied for a read cycle.
  - \*15.  $t_{WCS}$  is specified as a reference point only. If  $t_{WCS} \geq t_{WCS}(\min)$  the data output pin will remain High-Z state through entire cycle.
  - \*16. Assumes that  $t_{WCS} < t_{WCS}(\min)$ .
  - \*17. Either  $t_{DZC}$  or  $t_{DZO}$  must be satisfied.
  - \*18.  $t_{CPA}$  is access time from the selection of a new column address (that is caused by changing  $CAS$  from "L" to "H"). Therefore, if  $t_{CP}$  is long,  $t_{CPA}$  is longer than  $t_{CPA}(\max)$ .
  - \*19. Assumes that  $CAS$ -before- $RAS$  refresh.
  - \*20.  $t_{WCS}$ ,  $t_{CWD}$ ,  $t_{RWD}$ ,  $t_{AWD}$  and  $t_{CPWD}$  are not restrictive operating parameters. They are included in the data sheet as an electrical characteristic only. If  $t_{WCS} > t_{WCS}(\min)$ , the cycle is an early write cycle and DQ pin will maintain high-impedance state throughout the entire cycle. If  $t_{CWD} > t_{CWD}(\min)$ ,  $t_{RWD} > t_{RWD}(\min)$ ,  $t_{AWD} > t_{AWD}(\min)$  and  $t_{CPWD} > t_{CPWD}(\min)$  the cycle is a read modify-write cycle and data from the selected cell will appear at the DQ pin. If neither of the above conditions is satisfied, the cycle is a delayed write cycle and invalid data will appear the DQ pin, and write operation can be executed by satisfying  $t_{RWL}$ ,  $t_{CWL}$ ,  $t_{RAL}$  and  $t_{CAL}$  specifications.

# MB8116400B-50/-60


**Fig. 2 –  $t_{RAC}$  vs.  $t_{RCD}$**

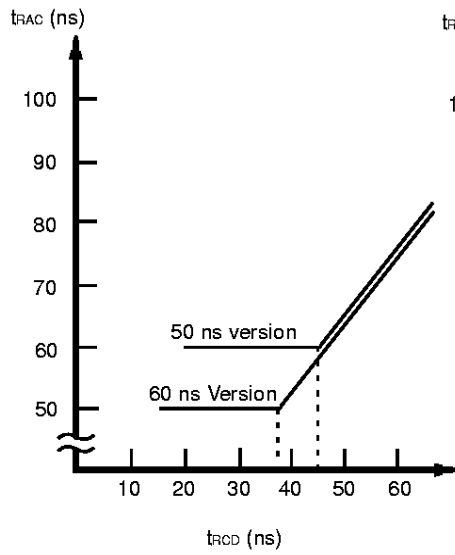

**Fig. 3 –  $t_{RAC}$  vs.  $t_{RAD}$**

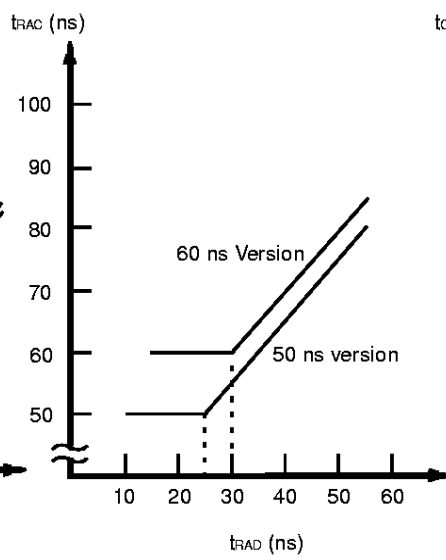

**Fig. 4 –  $t_{CPA}$  vs.  $t_{CP}$**

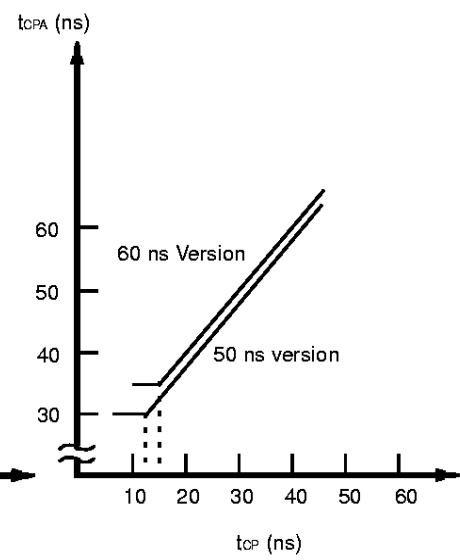




[illegible]

13

# MB8116400B-50/-60

Fig. 6 – EARLY WRITE CYCLE ( $\overline{OE}$  = “H” or “L”)

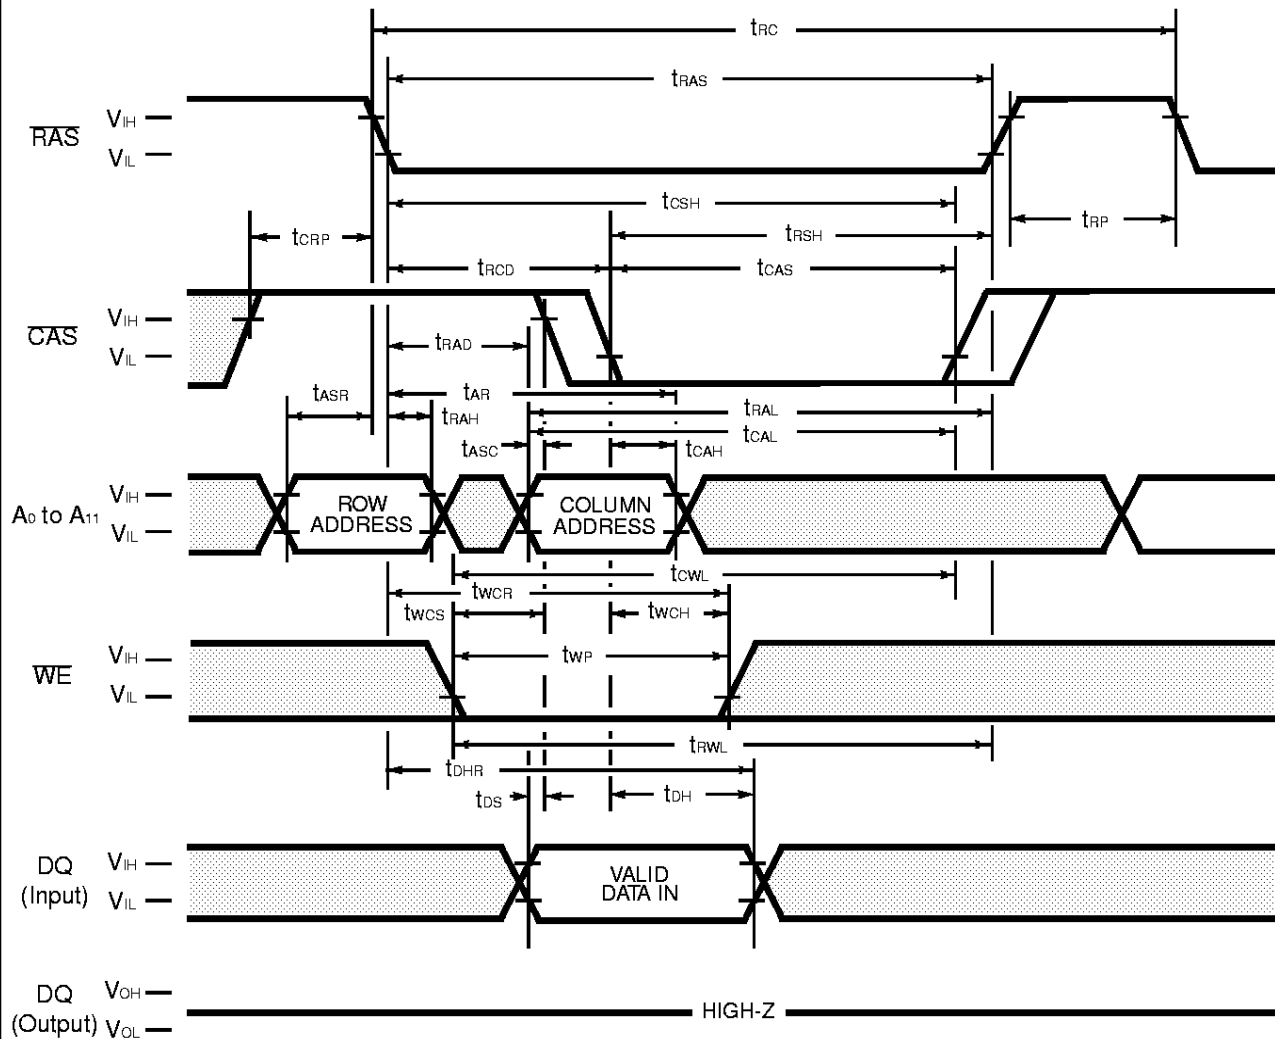


 "H" or "L" level (excluding Address and DQ)  
 "H" or "L" level, "H"→"L" or "L"→"H" transition (Address and DQ)

## DESCRIPTION

A write cycle is similar to a read cycle except  $\overline{WE}$  is set to a Low state and  $\overline{OE}$  is a "H" or "L" signal. A write cycle can be implemented in either of three ways—early write,  $\overline{OE}$  write (delayed write), or read-modify-write. During all write cycles, timing parameters  $t_{RWL}$ ,  $t_{CWL}$ ,  $t_{RAL}$  and  $t_{CAL}$  must be satisfied. In the early write cycle shown above  $t_{WCS}$  satisfied, data on the DQ pin is latched with the falling edge of  $\overline{CAS}$  and written into memory.

# MB8116400B-50/-60

**Fig. 7 – DELAYED WRITE CYCLE ( $\overline{OE}$  control)**

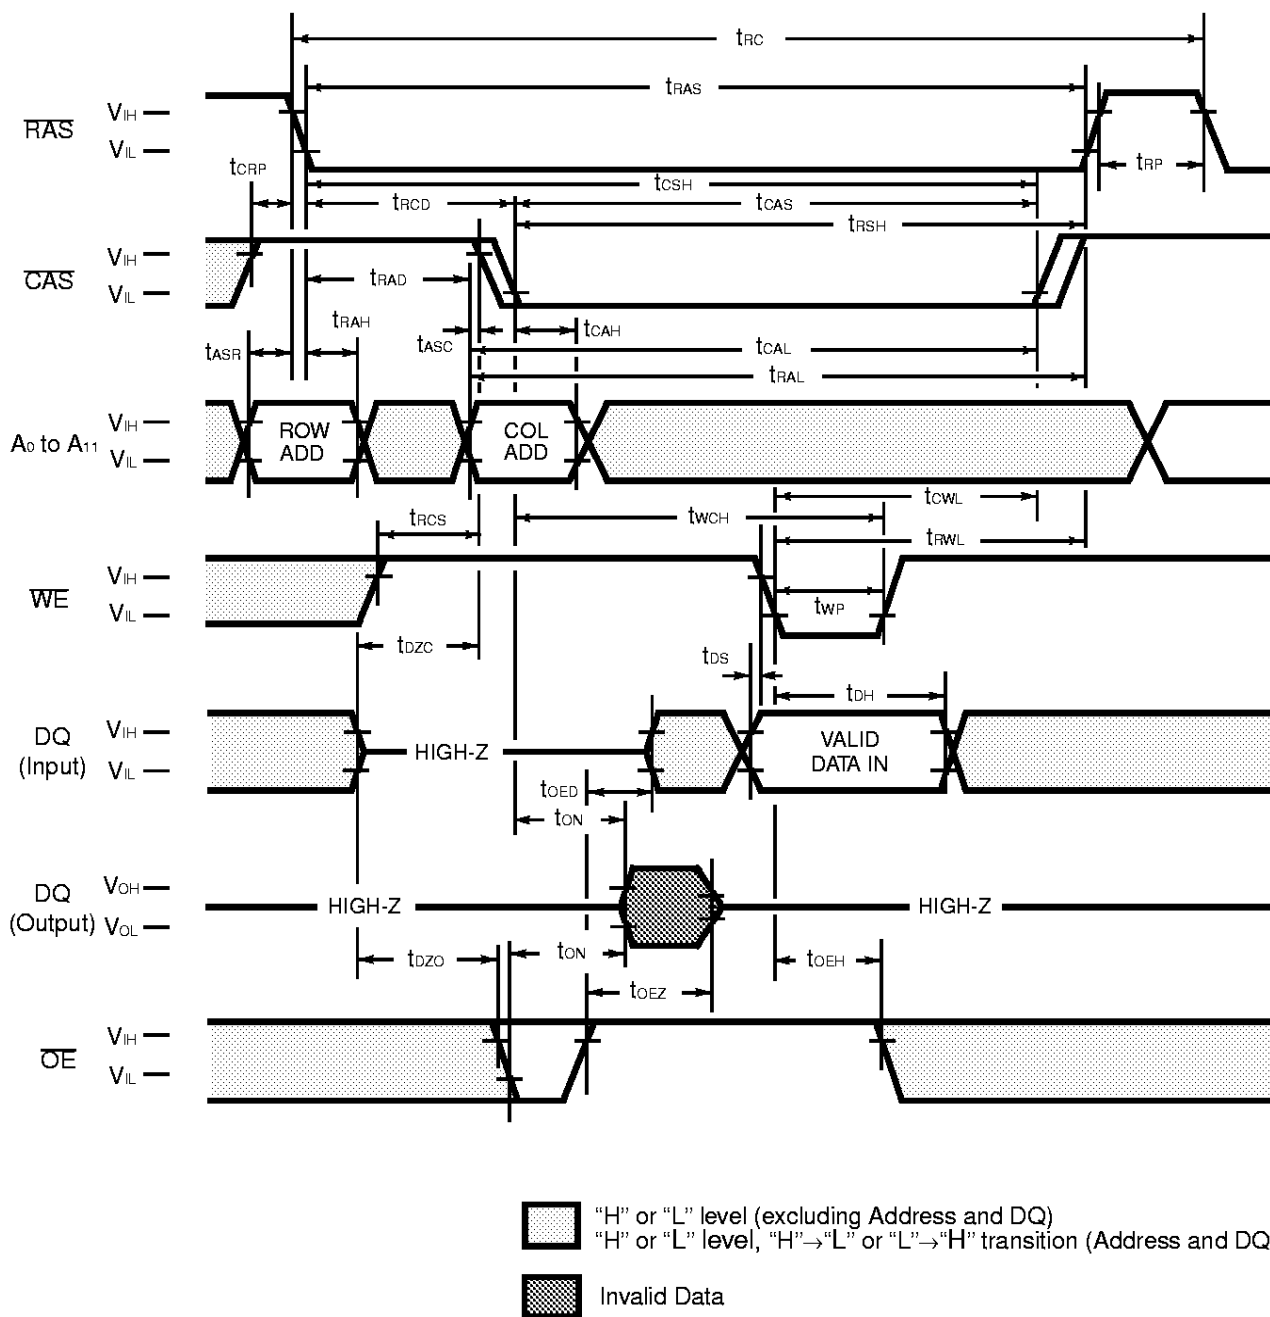


## DESCRIPTION

In the  $\overline{OE}$  (delayed write) cycle,  $tw_{CS}$  is not satisfied; thus, the data on the DQ pins is latched with the falling edge of  $\overline{WE}$  and written into memory. The Output Enable ( $\overline{OE}$ ) signal must be changed from Low to High before  $\overline{WE}$  goes Low ( $t_{OED} + t_{DS}$ ).

# MB8116400B-50/-60

Fig. 8 – READ-MODIFY-WRITE-CYCLE

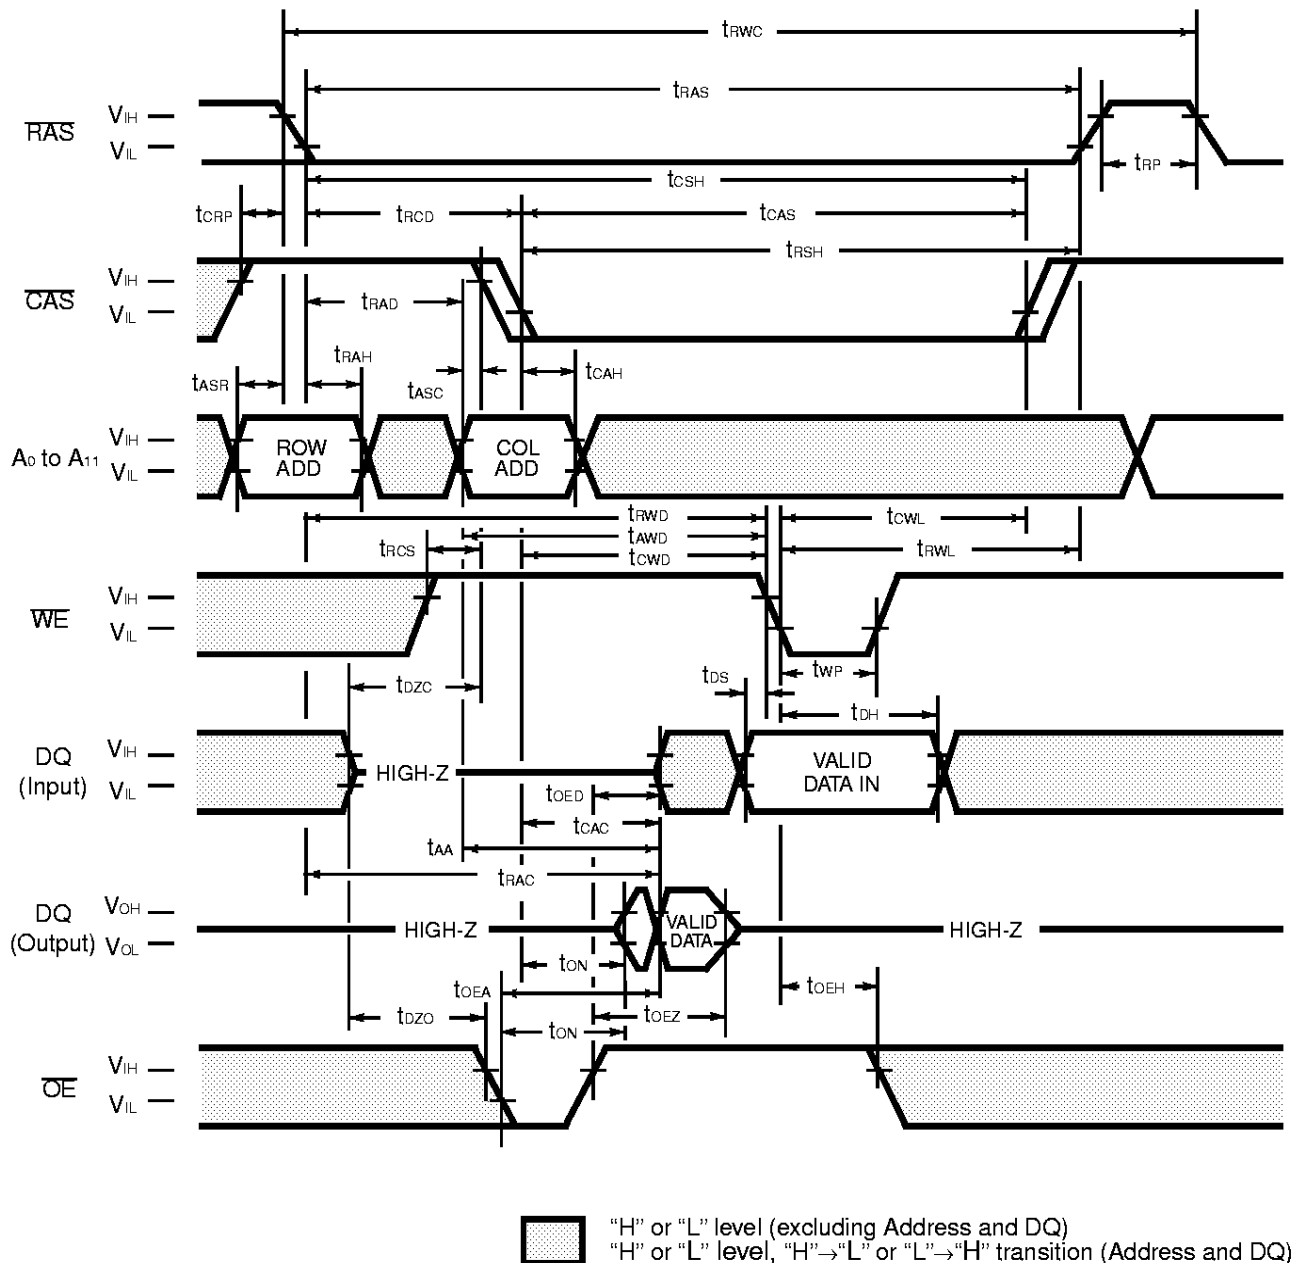


## DESCRIPTION

The read-modify-write cycle is executed by changing **WE** from High to Low after the data appears on the **DQ** pins. In the read-modify-write cycle, **OE** must be changed from Low to High after the memory access time.



## MB8116400B-50/-60

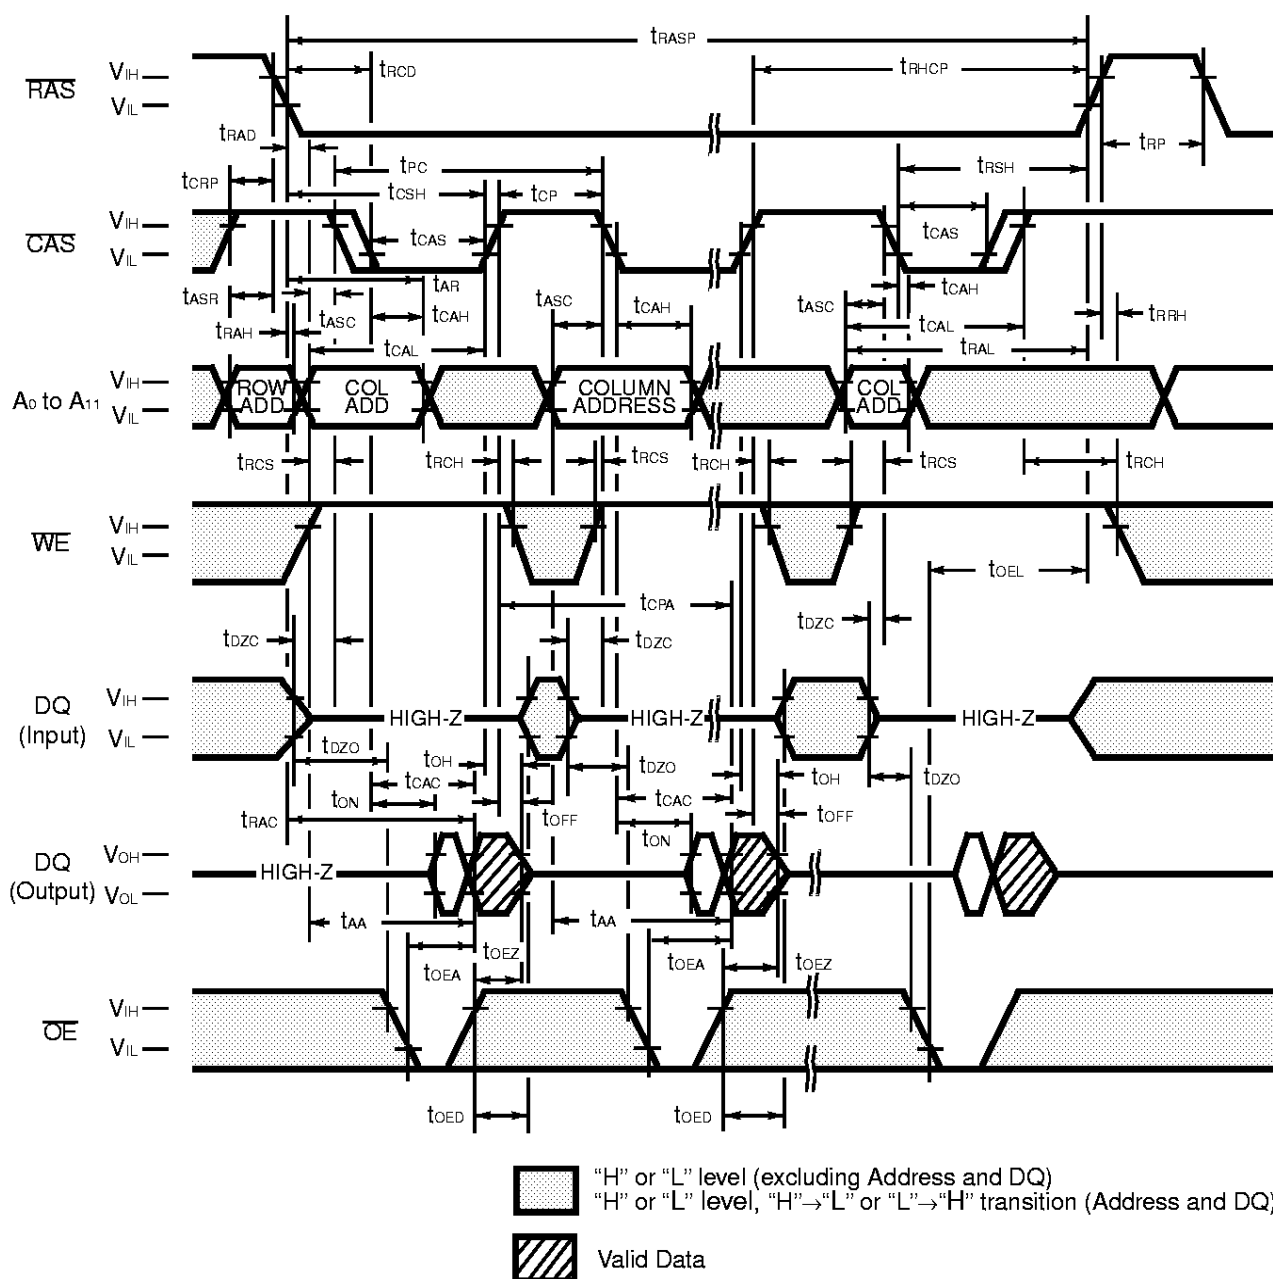

Fig. 9 – FAST PAGE MODE READ CYCLE



## DESCRIPTION

The fast page mode of operation permits faster successive memory operations at multiple column locations of the same row address. This operation is performed by strobing in the row address and maintaining **RAS** at a Low level and **WE** at a High level during all successive memory cycles in which the row address is latched. The access time is determined by  $t_{CAC}$ ,  $t_{AA}$ ,  $t_{CPA}$ , or  $t_{OEA}$ , which ever one is the latest in occurring.

[illegible]

	"H" or "L" level (excluding Address and DQ)
	"H" or "L" level, "H"→"L" or "L"→"H" transition (Address and DQ)

The fast page mode write cycle is executed in the same manner as the fast page mode read cycle except the states of  $\overline{\text{WE}}$  and  $\overline{\text{OE}}$  are reversed. Data appearing on the DQ pins is latched on the falling edge of  $\overline{\text{CAS}}$  and written into memory. During the fast page mode write cycle, including the delayed ( $\overline{\text{OE}}$ ) write and read-modify-write cycles,  $t_{\text{CWL}}$  must be satisfied.

[illegible]


The fast page mode  $\overline{\text{OE}}$  (delayed) write cycle is executed in the same manner as the fast page mode write cycle except for the states of  $\overline{\text{WE}}$  and  $\overline{\text{OE}}$ . Input data on the DQ pins are latched on the falling edge of  $\overline{\text{WE}}$  and written into memory. In the fast page mode delayed write cycle,  $\overline{\text{OE}}$  must be changed from Low to High before  $\overline{\text{WE}}$  goes Low ( $t_{\text{OED}} + t_{\text{DS}}$ ).

[illegible]

During the fast page mode of operation, the read-modify-write cycle can be executed by switching **WE** from High to Low after input data appears at the DQ pins during a normal cycle.

# MB8116400B-50/-60

Fig. 13 – RAS-ONLY REFRESH (WE = OE = “H” or “L”)

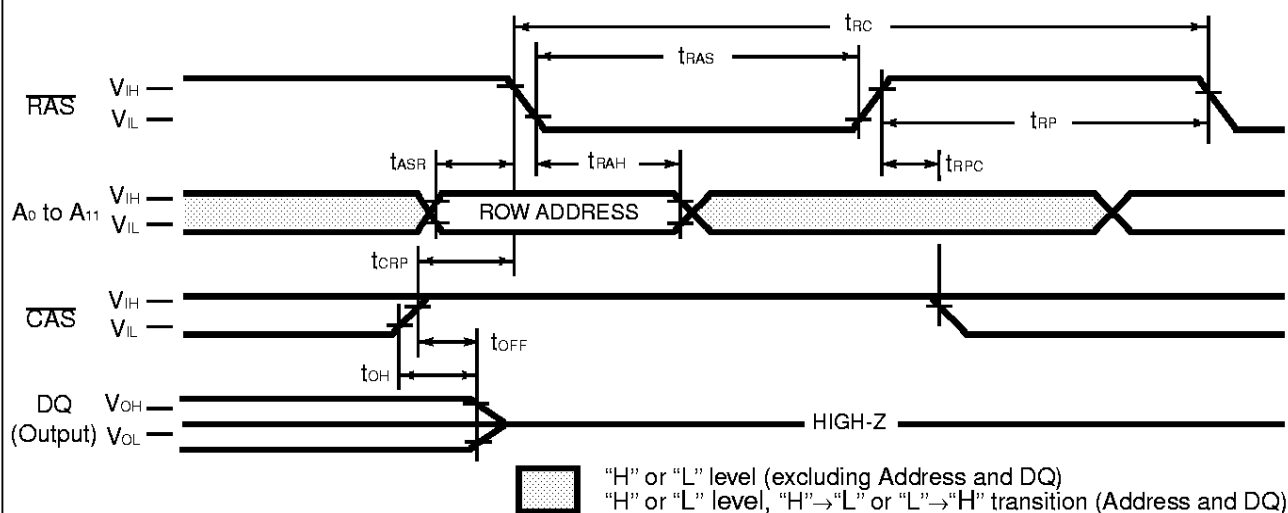


## DESCRIPTION

Refresh of RAM memory cells is accomplished by performing a read, a write, or a read-modify-write cycle at each of 4096 row addresses every 65.6-milliseconds. Three refresh modes are available: RAS-only refresh, CAS-before-RAS refresh, and hidden refresh.

RAS-only refresh is performed by keeping RAS Low and CAS High throughout the cycle; the row address to be refreshed is latched on the falling edge of RAS. During RAS-only refresh, DQ pin is kept in a high-impedance state.

Fig. 14 – CAS-BEFORE-RAS REFRESH (ADDRESSES = OE = “H” or “L”)

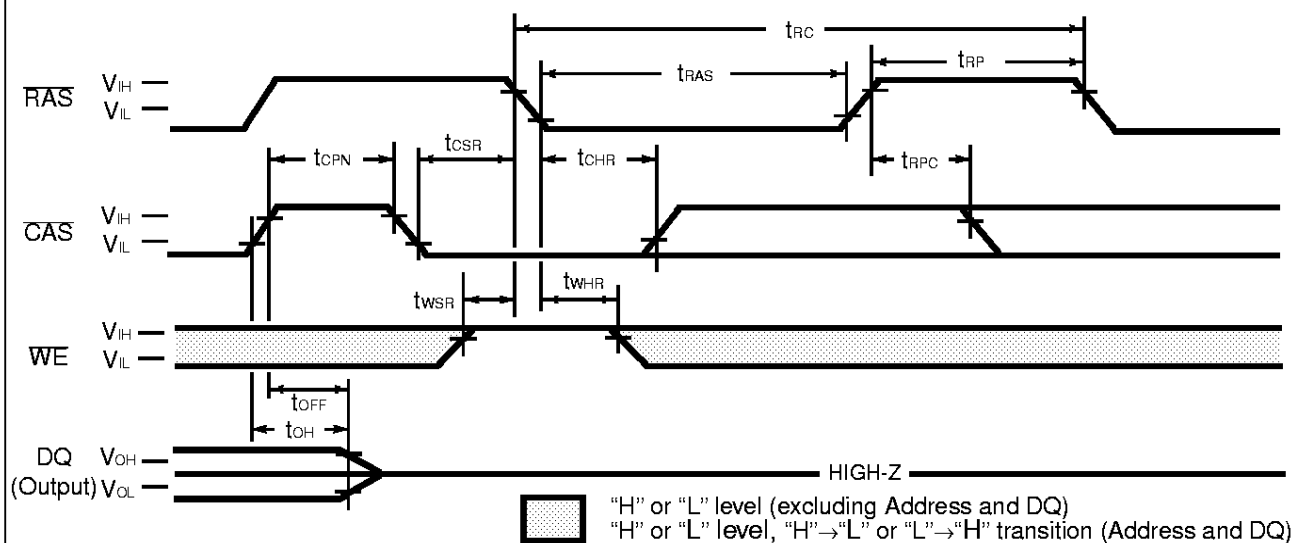


## DESCRIPTION

CAS-before-RAS refresh is an on-chip refresh capability that eliminates the need for external refresh addresses. If CAS is held Low for the specified setup time ( $t_{CSR}$ ) before RAS goes Low, the on-chip refresh control clock generators and refresh address counter are enabled. An internal refresh operation automatically occurs and the refresh address counter is internally incremented in preparation for the next CAS-before-RAS refresh operation.

# MB8116400B-50/-60

Fig. 15 – HIDDEN REFRESH CYCLE

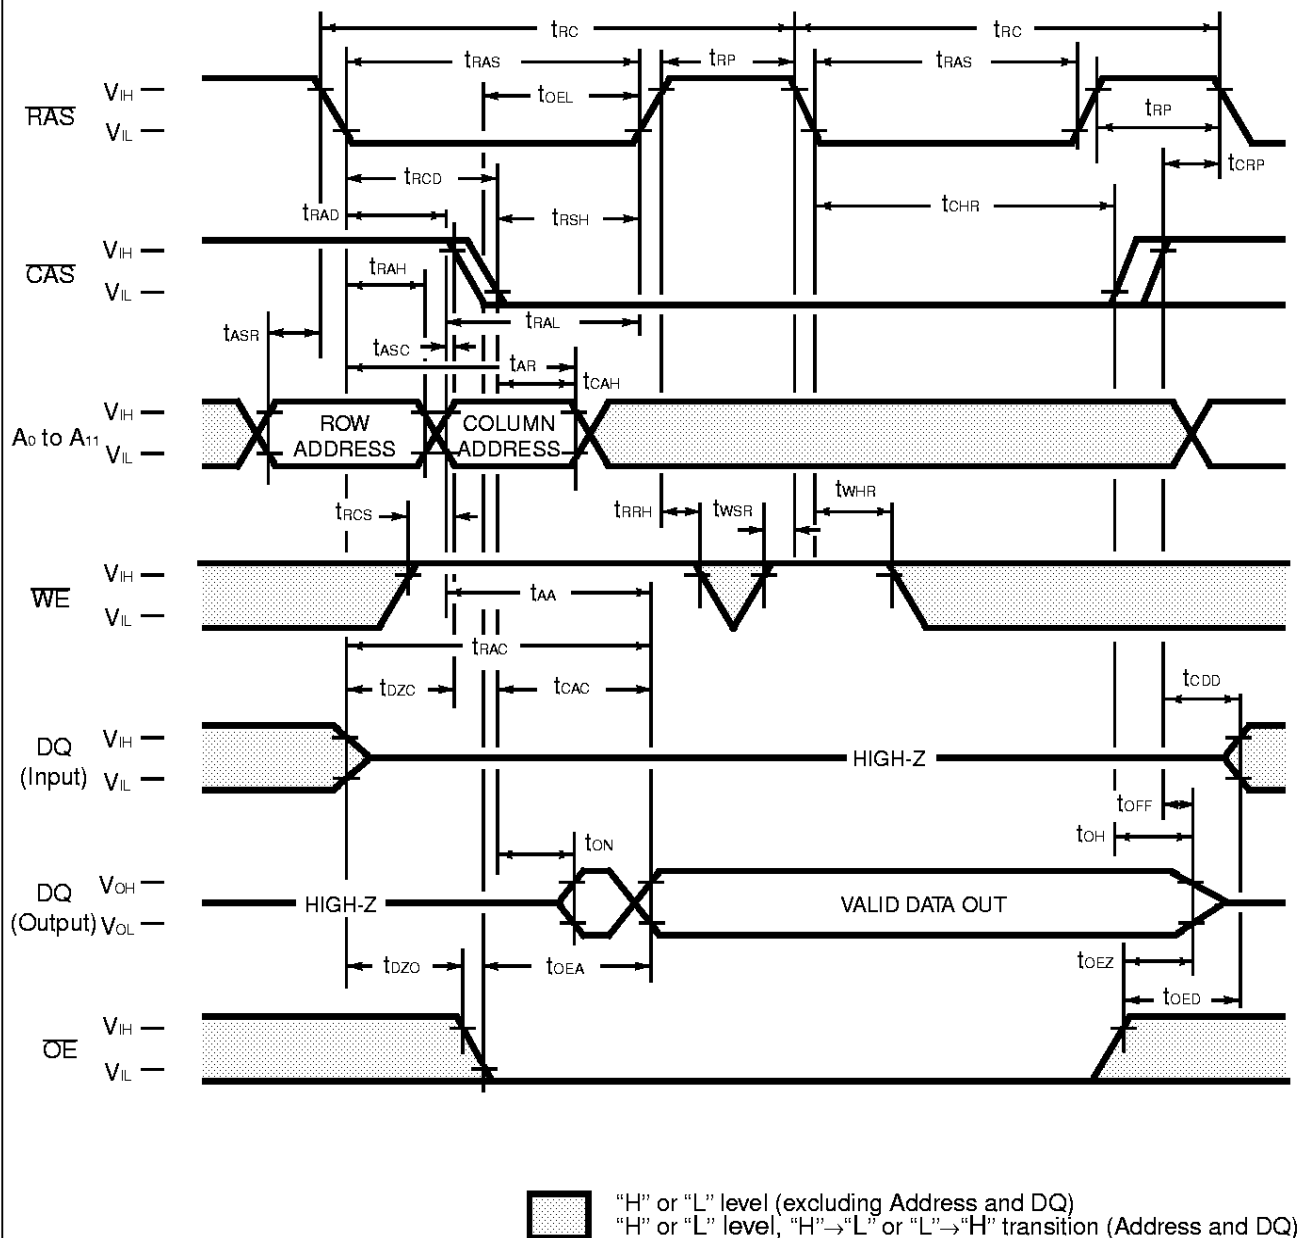


## DESCRIPTION

A hidden refresh cycle may be performed while maintaining the latest valid data at the output by extending the active time of  $\overline{CAS}$  and cycling  $\overline{RAS}$ . The refresh row address is provided by the on-chip refresh address counter. This eliminates the need for the external row address that is required by DRAMs that do not have  $\overline{CAS}$ -before- $\overline{RAS}$  refresh capability.

# MB8116400B-50/-60

Fig. 16 – TEST MODE SET CYCLE ( $A_0 - A_{11}$ ,  $\overline{OE} = \text{"H" or "L"}$ )

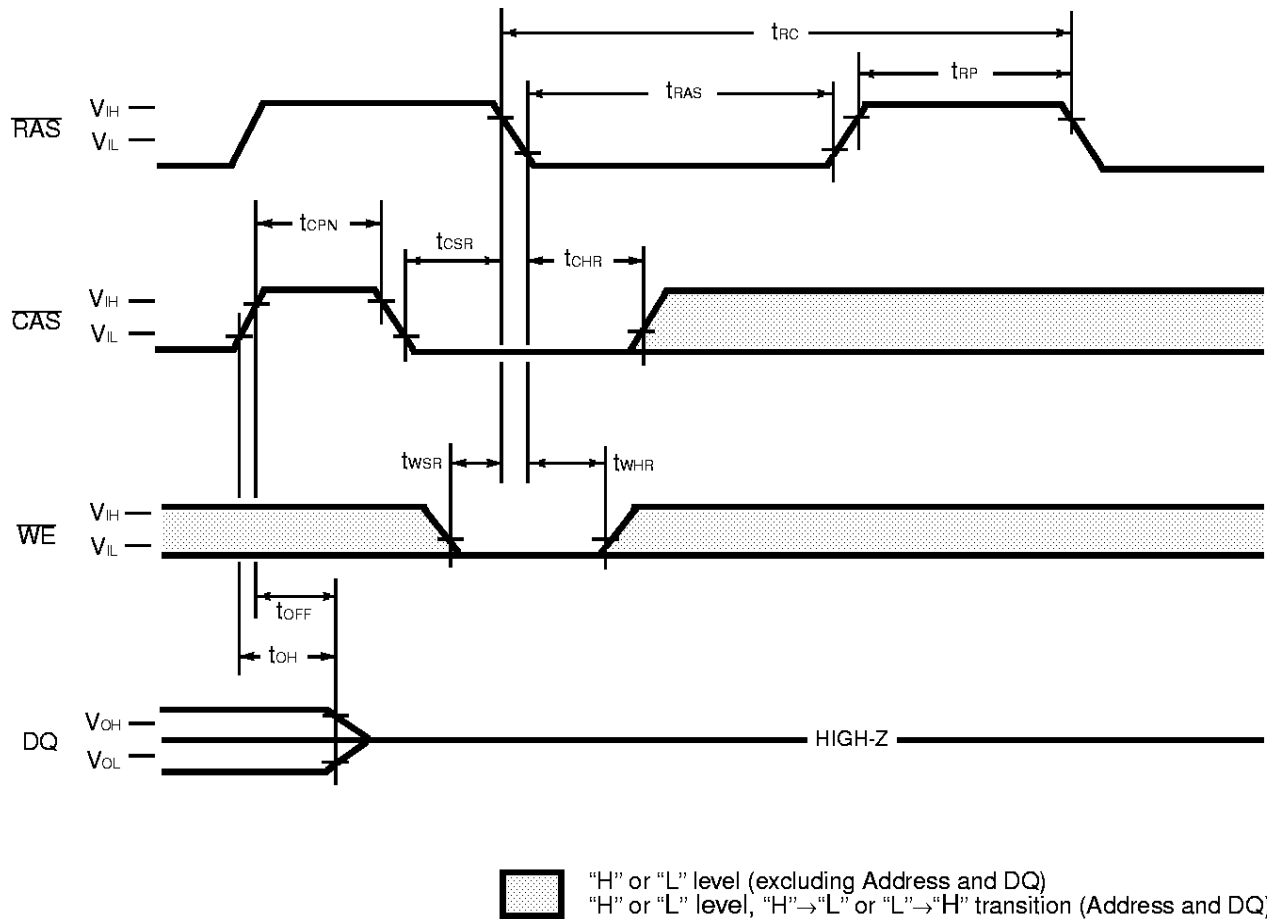

## DESCRIPTION

Test Mode ;

The purpose of this test mode is to reduce device test time to one sixteenth of that required to test the device conventionally.

The test mode function is entered by performing a  $\overline{WE}$  and  $\overline{CAS}$ -before- $\overline{RAS}$  (WCBR) refresh for the entry cycle.

In the test mode, read and write operations are executed in units of sixteenth bits which are selected by the address combination of  $CA_0$  and  $CA_1$ . In the write mode, data is written into sixteenth cells simultaneously. But the data must be input from  $DQ_1$  only. In the read mode, the data of sixteenth cells at the selected addresses are read out from DQ and checked in the following manner.

When the sixteenth bits are all "L" or all "H", a "H" level is output.

When the sixteenth bits show a combination of "L" and "H", a "L" level is output.


The test mode function is exited by performing a  $\overline{RAS}$ -only refresh or a  $\overline{CAS}$ -before- $\overline{RAS}$  refresh for the exit cycle.

In test mode operation, the following parameters are delayed approximately 10 ns from the specified value in the data sheet

$t_{RC}$ ,  $t_{FWD}$ ,  $t_{RAC}$ ,  $t_{OAC}$ ,  $t_{AA}$ ,  $t_{RAS}$ ,  $t_{RSH}$ ,  $t_{OAS}$ ,  $t_{OSH}$ ,  $t_{RAL}$ ,  $t_{OAL}$ ,  $t_{RWD}$ ,  $t_{OWD}$ ,  $t_{AWD}$ ,  $t_{CPWD}$ ,  $t_{RCP}$

# MB8116400B-50/-60

**Fig. 17 – CAS-BEFORE-RAS REFRESH COUNTER TEST CYCLE**

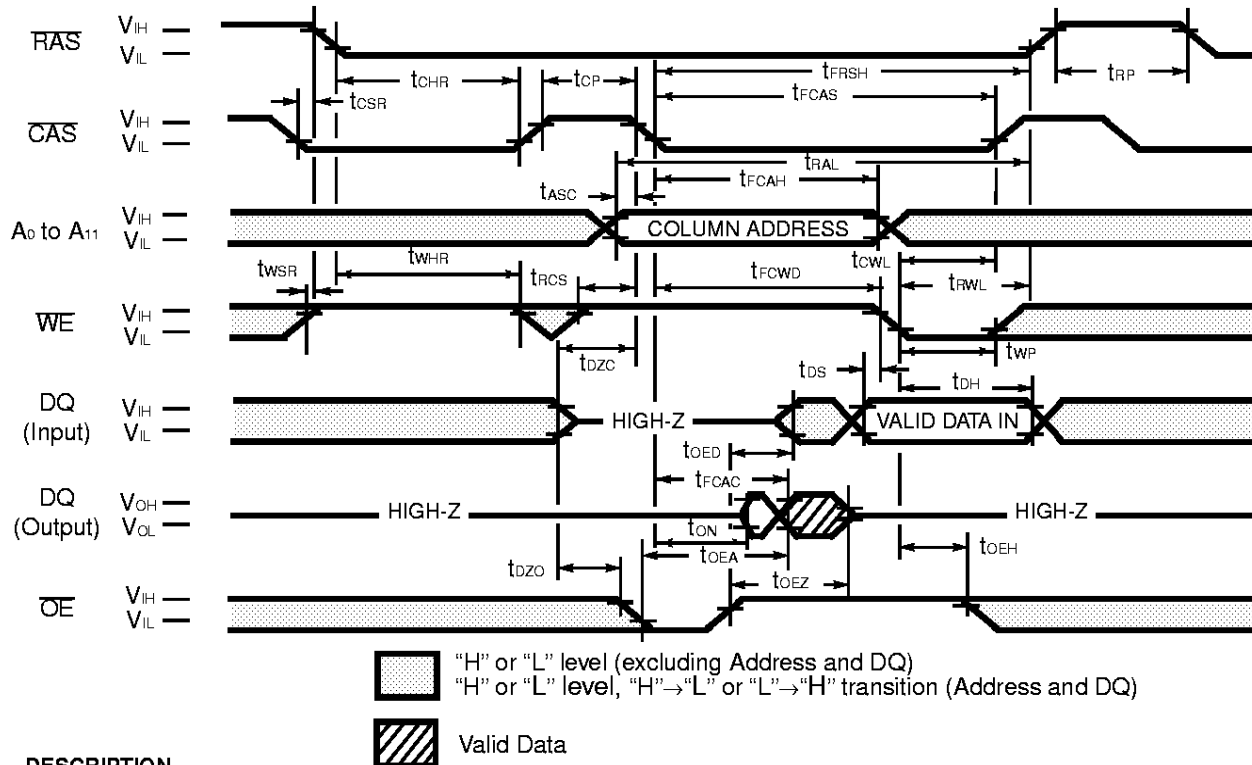

### DESCRIPTION

A special timing sequence using the ~~CAS-before-RAS~~ refresh counter test cycle provides a convenient method to verify the functionality of ~~CAS-before-RAS~~ refresh circuitry. If, after a ~~CAS-before-RAS~~ refresh cycle CAS makes a transition from High to Low while RAS is held Low, read and write operations are enabled as shown above. Row and column addresses are defined as follows:

Row Address: Bits A<sub>0</sub> through A<sub>11</sub> are defined by the on-chip refresh counter.

Column Address: Bits A<sub>0</sub> through A<sub>9</sub> are defined by latching levels on A<sub>0</sub> to A<sub>9</sub> at the second falling edge of  $\overline{\text{CAS}}$ .

The CAS-before-RAS Counter Test procedure is as follows ;

- 1) Initialize the internal refresh address counter by using 8 ~~CAS-before-RAS~~ refresh cycles.
- 2) Use the same column address throughout the test.
- 3) Write "0" to all 4096 row addresses at the same column address by using normal write cycles.
- 4) Read "0" written in procedure 3) and check; simultaneously write "1" to the same addresses by using ~~CAS-before-RAS~~ refresh counter test (read-modify-write cycles). Repeat this procedure 4096 times with addresses generated by the internal refresh address counter.
- 5) Read and check data written in procedure 4) by using normal read cycle for all 4096 memory locations.
- 6) Reverse test data and repeat procedures 3), 4), and 5).

(At recommended operating conditions unless otherwise noted.)

No.	Parameter	Symbol	MB8116400B-50		MB8116400B-60		Unit
			Min.	Max.	Min.	Max.	
90	Access Time from $\overline{\text{CAS}}$	$t_{\text{FCAC}}$	—	45	—	50	ns
91	Column Address Hold Time	$t_{\text{FCAH}}$	35	—	35	—	ns
92	$\overline{\text{CAS}}$ to $\overline{\text{WE}}$ Delay Time	$t_{\text{FCWD}}$	63	—	70	—	ns
93	$\overline{\text{CAS}}$ Pulse width	$t_{\text{FCAS}}$	45	—	50	—	ns
94	$\overline{\text{RAS}}$ Hold Time	$t_{\text{FRSH}}$	45	—	50	—	ns

Note. Assumes that  $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$  refresh counter test cycle only.




# MB8116400B-50/-60

## ■ PACKAGE DIMENSIONS

26-pin plastic SOJ  
(LCC-26P-M09)

\* Resin protrusion. (Each side: .015(.0060) MAX.)

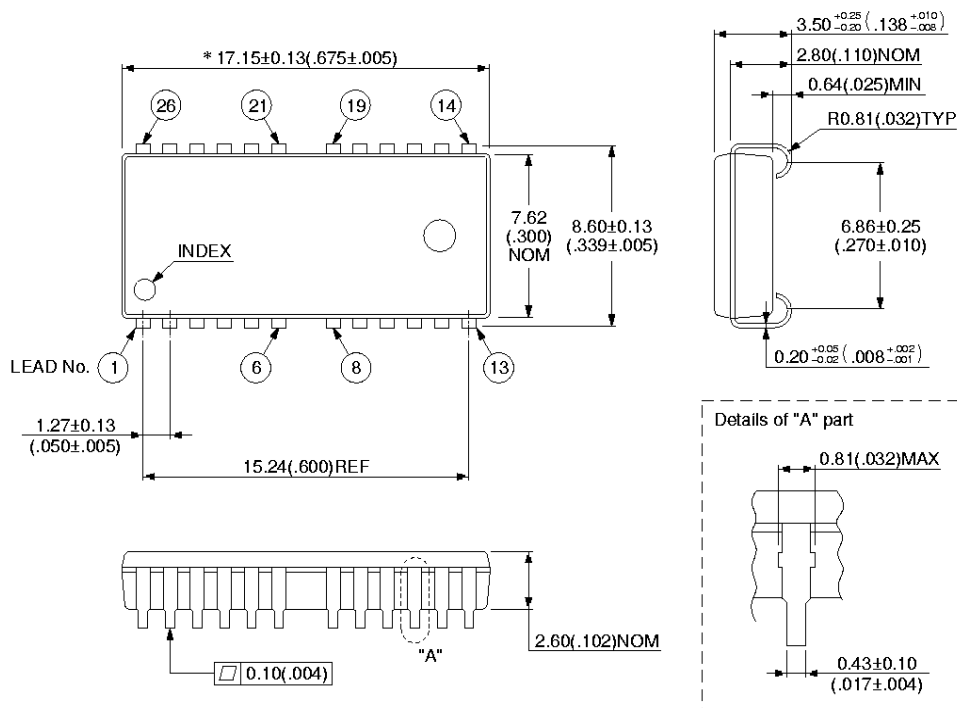

© 1994 FUJITSU LIMITED C26059S-3C-1




Dimensions in mm (inches)

# MB8116400B-50/-60

(Continued)

26-pin plastic TSOP(II)  
(FPT-26P-M05)

\* Resin protrusion. (Each side: .015(.006) MAX.)

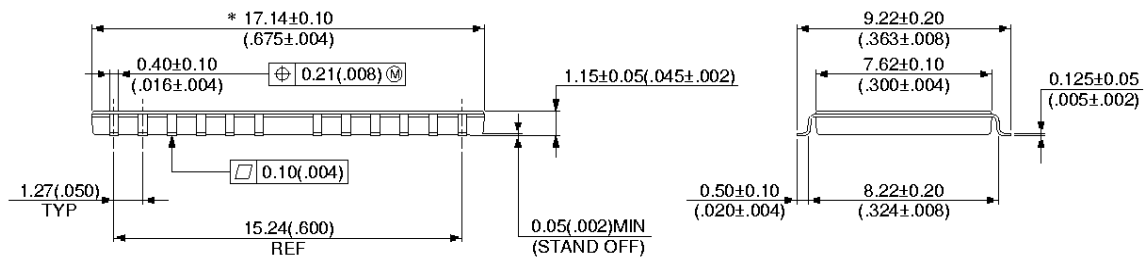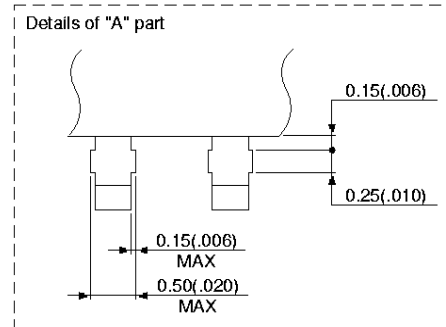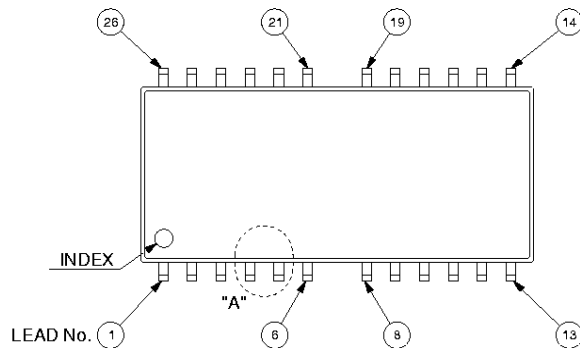

© 1994 FUJITSU LIMITED F26005S-2C-1

Dimensions in mm (inches)

## FUJITSU LIMITED

*For further information please contact:*

### Japan

FUJITSU LIMITED  
Corporate Global Business Support Division  
Electronic Devices  
KAWASAKI PLANT, 4-1-1, Kamikodanaka  
Nakahara-ku, Kawasaki-shi  
Kanagawa 211-88, Japan  
Tel: (044) 754-3763  
Fax: (044) 754-3329

<http://www.fujitsu.co.jp/>

### North and South America

FUJITSU MICROELECTRONICS, INC.  
Semiconductor Division  
3545 North First Street  
San Jose, CA 95134-1804, U.S.A.  
Tel: (408) 922-9000  
Fax: (408) 922-9179

Customer Response Center  
Mon. - Fri.: 7 am - 5 pm (PST)  
Tel: (800) 866-8608  
Fax: (408) 922-9179

<http://www.fujitsumicro.com/>

### Europe

FUJITSU MIKROELEKTRONIK GmbH  
Am Siebenstein 6-10  
D-63303 Dreieich-Buchsschlag  
Germany  
Tel: (06103) 690-0  
Fax: (06103) 690-122

<http://www.fujitsu-edc.com/>

### Asia Pacific

FUJITSU MICROELECTRONICS ASIA PTE LTD  
#05-08, 151 Lorong Chuan  
New Tech Park  
Singapore 556741  
Tel: (65) 281-0770  
Fax: (65) 281-0220

<http://www.fmap.com.sg/>

F9712

© FUJITSU LIMITED Printed in Japan

All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU sales representatives before ordering.

The information and circuit diagrams in this document presented as examples of semiconductor device applications, and are not intended to be incorporated in devices for actual use. Also, FUJITSU is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of this information or circuit diagrams.

FUJITSU semiconductor devices are intended for use in standard applications (computers, office automation and other office equipment, industrial, communications, and measurement equipment, personal or household devices, etc.).

#### CAUTION:

Customers considering the use of our products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage, or where extremely high levels of reliability are demanded (such as aerospace systems, atomic energy controls, sea floor repeaters, vehicle operating controls, medical devices for life support, etc.) are requested to consult with FUJITSU sales representatives before such use. The company will not be responsible for damages arising from such use without prior approval.

Any semiconductor devices have inherently a certain rate of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Control Law of Japan, the prior authorization by Japanese government should be required for export of those products from Japan.