

DESCRIPTION

M54526P and M54526FP are seven-circuit Darlington transistor arrays with clamping diodes. The circuits are made of NPN transistors. Both the semiconductor integrated circuits perform high-current driving with extremely low input-current supply.

FEATURES

- High breakdown voltage ($BV_{CEO} \geq 50V$)
- High-current driving ($I_c(\text{max}) = 500\text{mA}$)
- With clamping diodes
- Driving available with PMOS IC output of 8-18V
- Wide operating temperature range ($T_a = -20$ to $+75^\circ\text{C}$)

APPLICATION


Drives of relays and printers, digit drives of indication elements (LEDs and lamps), and MOS-bipolar logic IC interfaces

FUNCTION


The M54526P and M54526FP each have seven circuits consisting of NPN Darlington transistors. These ICs have resistance of $10.5\text{k}\Omega$ between input transistor bases and input pins. A spike-killer clamping diode is provided between each output pin (collector) and COM pin (pin 9). The output transistor emitters are all connected to the GND pin (pin 8).

The collector current is 500mA maximum. Collector-emitter supply voltage is 50V maximum.

The M54526FP is enclosed in a molded small flat package, enabling space-saving design.

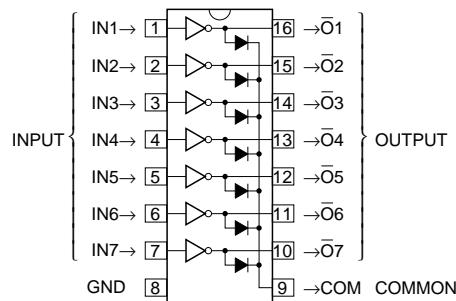PIN CONFIGURATION

16P4(P)
Package type 16P2N-A(FP)

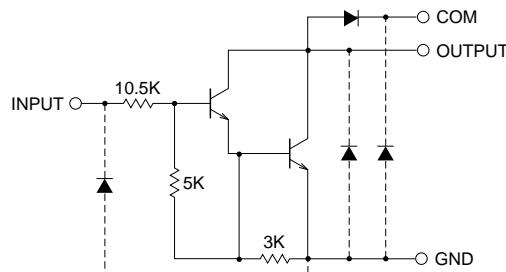CIRCUIT DIAGRAM

The seven circuits share the COM and GND.

The diode, indicated with the dotted line, is parasitic, and cannot be used.

Unit : Ω

ABSOLUTE MAXIMUM RATINGS (Unless otherwise noted, $T_a = -20$ ~ $+75^\circ\text{C}$)

Symbol	Parameter	Conditions	Ratings	Unit
V _{CEO}	Collector-emitter voltage	Output, H	-0.5 ~ +50	V
I _C	Collector current	Current per circuit output, L	500	mA
V _I	Input voltage		-0.5 ~ +30	V
I _F	Clamping diode forward current		500	mA
V _R	Clamping diode reverse voltage		50	V
P _d	Power dissipation	$T_a = 25^\circ\text{C}$, when mounted on board	1.47(P)/1.00(FP)	W
T _{opr}	Operating temperature		-20 ~ +75	°C
T _{stg}	Storage temperature		-55 ~ +125	°C

7-UNIT 500mA DARLINGTON TRANSISTOR ARRAY WITH CLAMP DIODE

RECOMMENDED OPERATING CONDITIONS (unless otherwise noted, $T_a = -20 \sim +75^\circ\text{C}$)

Symbol	Parameter	Limits			Unit
		min	typ	max	
Vo	Output voltage	0	—	50	V
IC	Collector current (Current per 1 circuit when 7 circuits are coming on simultaneously)	Duty Cycle P : no more than 8% FP : no more than 6%	0	—	400
		Duty Cycle P : no more than 30% FP : no more than 25%	0	—	200
VIH	"H" input voltage	8	—	25	V
VIL	"L" input voltage	0	—	0.5	V

ELECTRICAL CHARACTERISTICS (Unless otherwise noted, $T_a = -20 \sim +75^\circ\text{C}$)


Symbol	Parameter	Test conditions	Limits			Unit
			min	typ*	max	
V (BR) CEO	Collector-emitter breakdown voltage	ICEO = 100μA	50	—	—	V
VCE (sat)	Collector-emitter saturation voltage	VI = 8V, IC = 400mA	—	1.3	2.4	V
		VI = 8V, IC = 200mA	—	0.95	1.6	
II	Input current	VI = 10V	—	0.9	1.5	mA
		VI = 25V	—	2.8	4.1	
VF	Clamping diode forward voltage	IF = 400mA	—	1.5	2.4	V
IR	Clamping diode reverse current	VR = 50V	—	—	100	μA
hFE	DC amplification factor	VCE = 4V, IC = 350mA, Ta = 25°C	1000	2500	—	—

* : The typical values are those measured under ambient temperature (T_a) of 25°C. There is no guarantee that these values are obtained under any conditions.


SWITCHING CHARACTERISTICS (Unless otherwise noted, $T_a = 25^\circ\text{C}$)

Symbol	Parameter	Test conditions	Limits			Unit
			min	typ	max	
ton	Turn-on time	CL = 15pF (note 1)	—	12	—	ns
toff	Turn-off time		—	230	—	ns

NOTE 1 TEST CIRCUIT

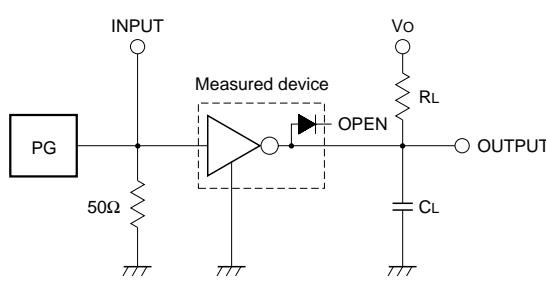







TIMING DIAGRAM

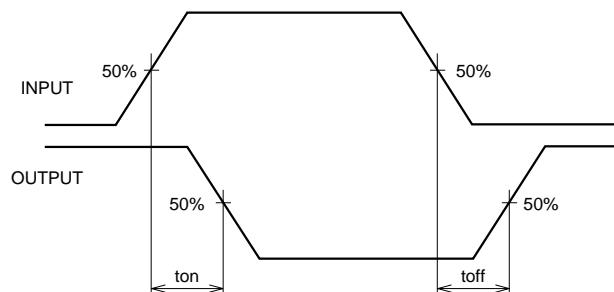

- (1) Pulse generator (PG) characteristics : PRR = 1kHz,
 $t_w = 10\mu\text{s}$, $t_r = 6\text{ns}$, $t_f = 6\text{ns}$, $Z_0 = 50\Omega$
 $V_p = 8\text{Vp-p}$
- (2) Input-output conditions : $R_L = 25\Omega$, $V_o = 10\text{V}$
- (3) Electrostatic capacity C_L includes floating capacitance at connections and input capacitance at probes

7-UNIT 500mA DARLINGTON TRANSISTOR ARRAY WITH CLAMP DIODE

TYPICAL CHARACTERISTICS

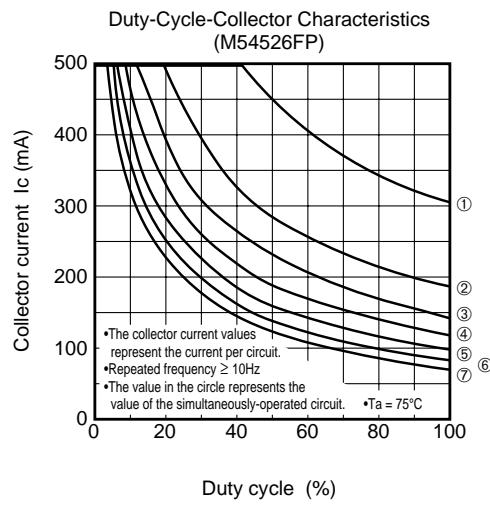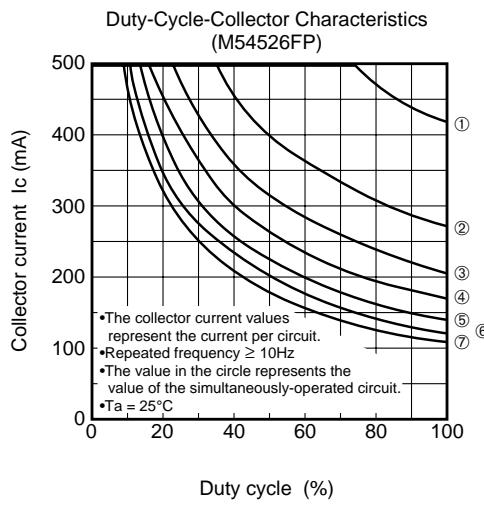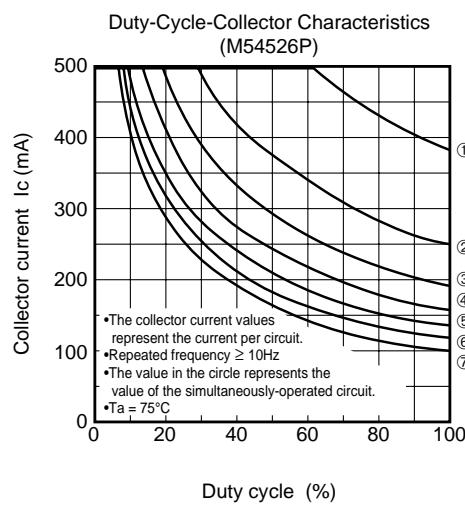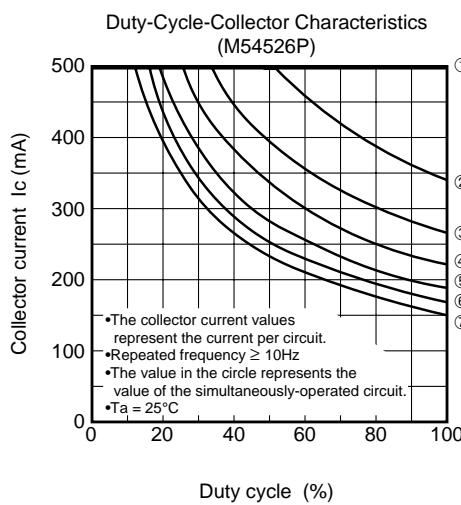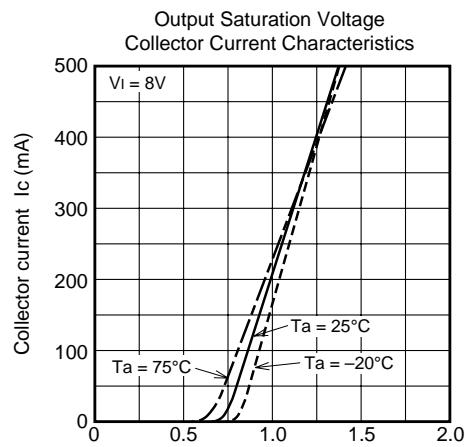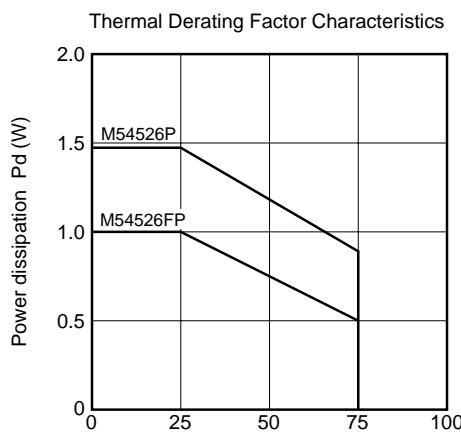

7-UNIT 500mA DARLINGTON TRANSISTOR ARRAY WITH CLAMP DIODE

