

## General Description


KR Electronics part number 3351-1800-100 is a 1800 MHz Bandpass filter. The filter has a 1 dB bandwidth of 100 MHz. Other center frequencies and bandwidths are available. Please consult the factory.

## Features

- 1800 MHz Bandpass Filter
- 1 dB Bandwidth 100 MHz  $\pm$ 25%
- 50  $\Omega$  Source and Load
- Other frequencies available
- Surface Mount

## Typical Performance



Overall Response  
(10 dB/div)

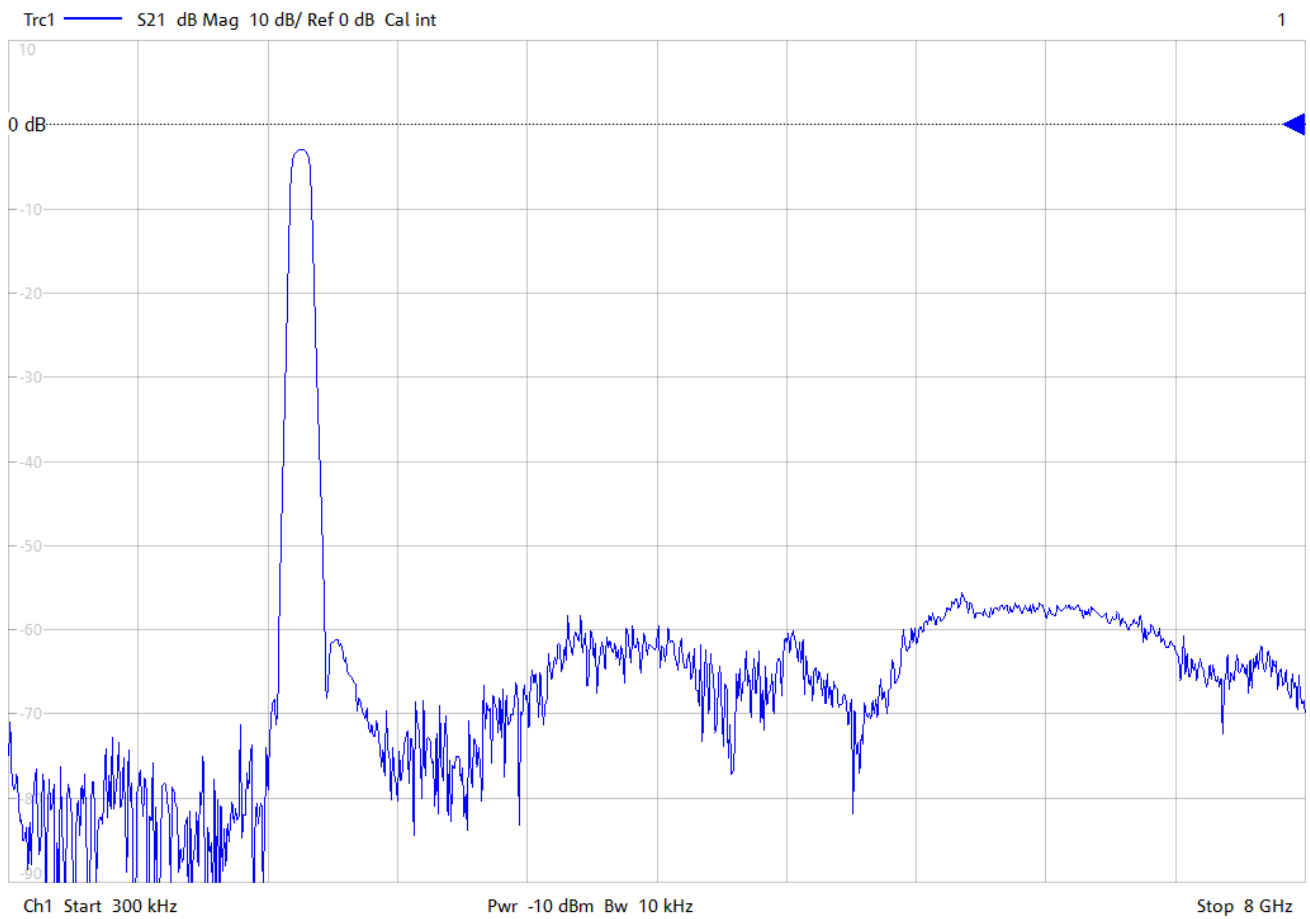

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001

Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR Electronics 3351-1800-100

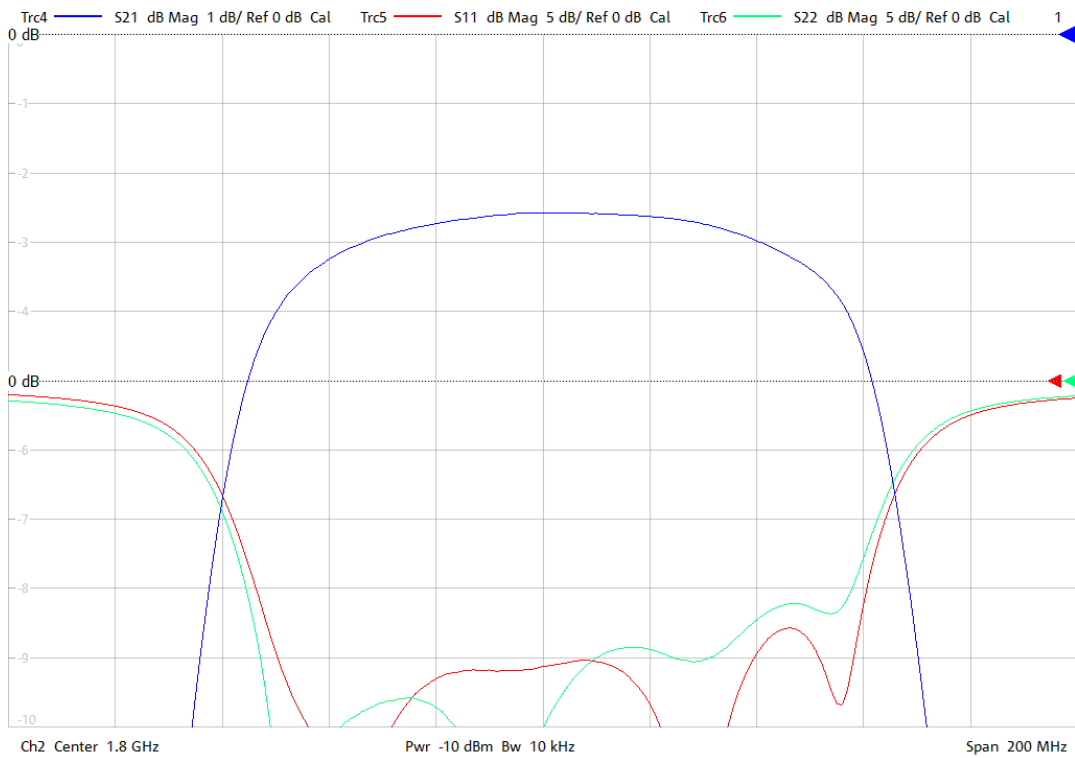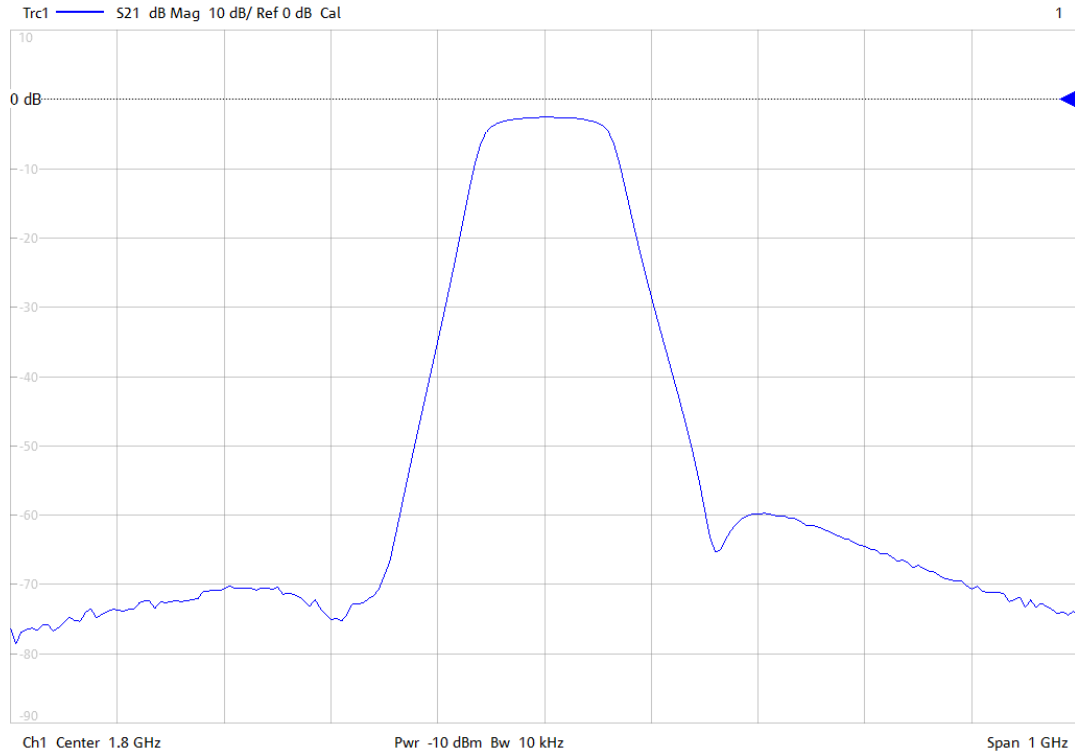

KR Electronics, Inc.  
 91 Avenel Street  
 Avenel, NJ 07001


Web [www.krfilters.com](http://www.krfilters.com)  
 Email [sales@krfilters.com](mailto:sales@krfilters.com)  
 Phone (732) 636-1900  
 Fax (732) 636-1982

# KR Electronics 3351-1800-100

## Specifications

Parameter	Specification	Notes
Filter type	Bandpass	
Center Frequency	1800 MHz	
Insertion Loss at Fc	4.5 dBa max	2.6 dBa typical
1 dBc Bandwidth	100 MHz $\pm$ 25%	
3 dBc Bandwidth	120 MHz typical	
40 dBc Bandwidth	240 MHz typical	
50 dBc Bandwidth	270 MHz typical	
Source and Load	50 $\Omega$	

## Physical Dimensions

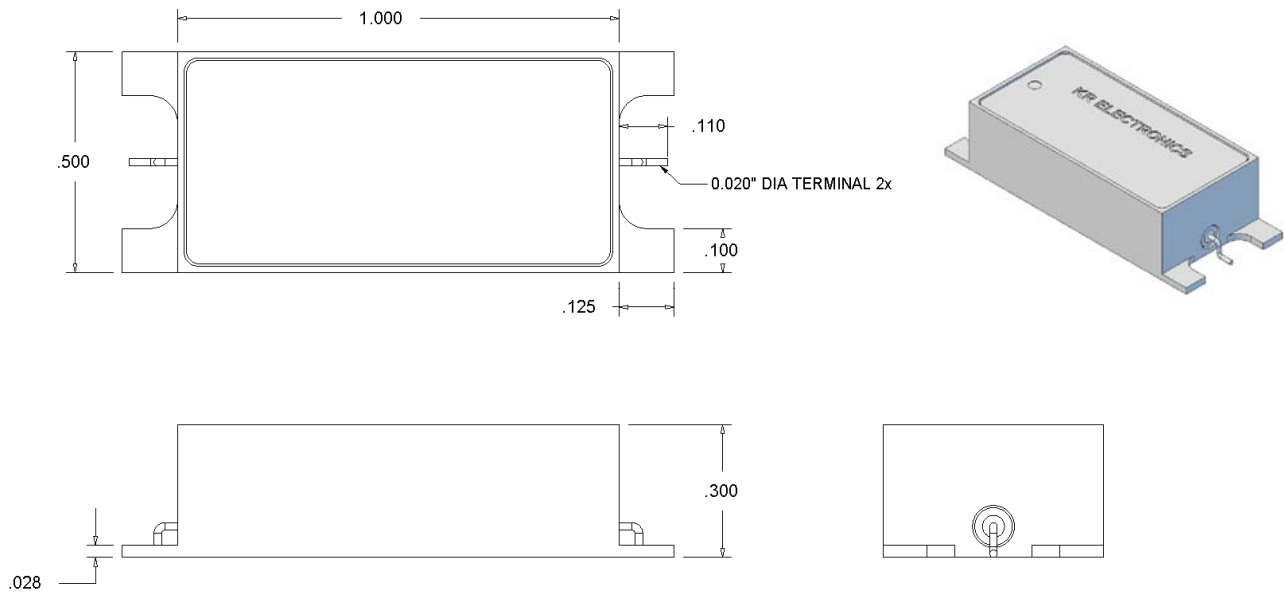

**Notes:**

1. Surface mount package
2. Dimensions in inches
3. Maximum reflow temperature is 220° C for 10 sec maximum.

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001

Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982