
HM62W8512BI Series

4 M SRAM (512-kword × 8-bit)

HITACHI

ADE-203-1086A (Z)

Rev. 1.0

Jul. 13, 1999

Description

The Hitachi HM62W8512BI is a 4-Mbit static RAM organized 512-kword × 8-bit. HM62W8512BI Series has realized higher density, higher performance and low power consumption by employing Hi-CMOS process technology. The HM62W8512BI Series offers low power standby power dissipation; therefore, it is suitable for battery backup systems. It is packaged in standard 32-pin TSOP II.

Features


- Single 3.3 V supply: 3.3 V ± 0.3V
- Access time: 70/85 ns (max)
- Power dissipation
 - Active: 16.5 mW/MHz (typ)
 - Standby: 3.3 μW (typ)
- Completely static memory. No clock or timing strobe required
- Equal access and cycle times
- Common data input and output: Three state output
- Directly LV-TTL compatible: All inputs and outputs
- Battery backup operation
- Operating temperature: -40 to +85°C

Ordering Information

| Type No. | Access time | Package |
|------------------|-------------|--|
| HM62W8512BLTTI-7 | 70 ns | 400-mil 32-pin plastic TSOP II (TTP-32D) |
| HM62W8512BLTTI-8 | 85 ns | |

Pin Arrangement

32-pin TSOPII (Normal Type TSOP)

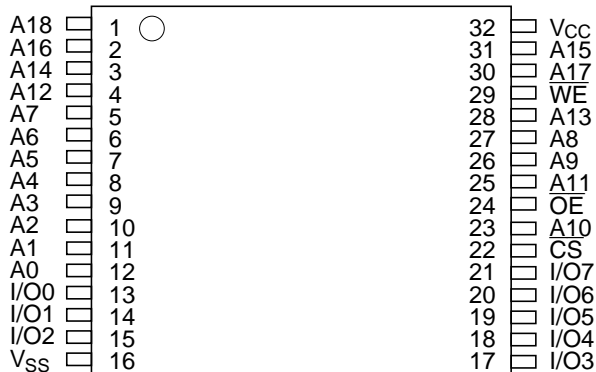


(Top view)

Pin Description

| Pin name | Function |
|-----------------|-------------------|
| A0 to A18 | Address input |
| I/O0 to I/O7 | Data input/output |
| CS | Chip select |
| OE | Output enable |
| WE | Write enable |
| V _{CC} | Power supply |
| V _{SS} | Ground |

Block Diagram

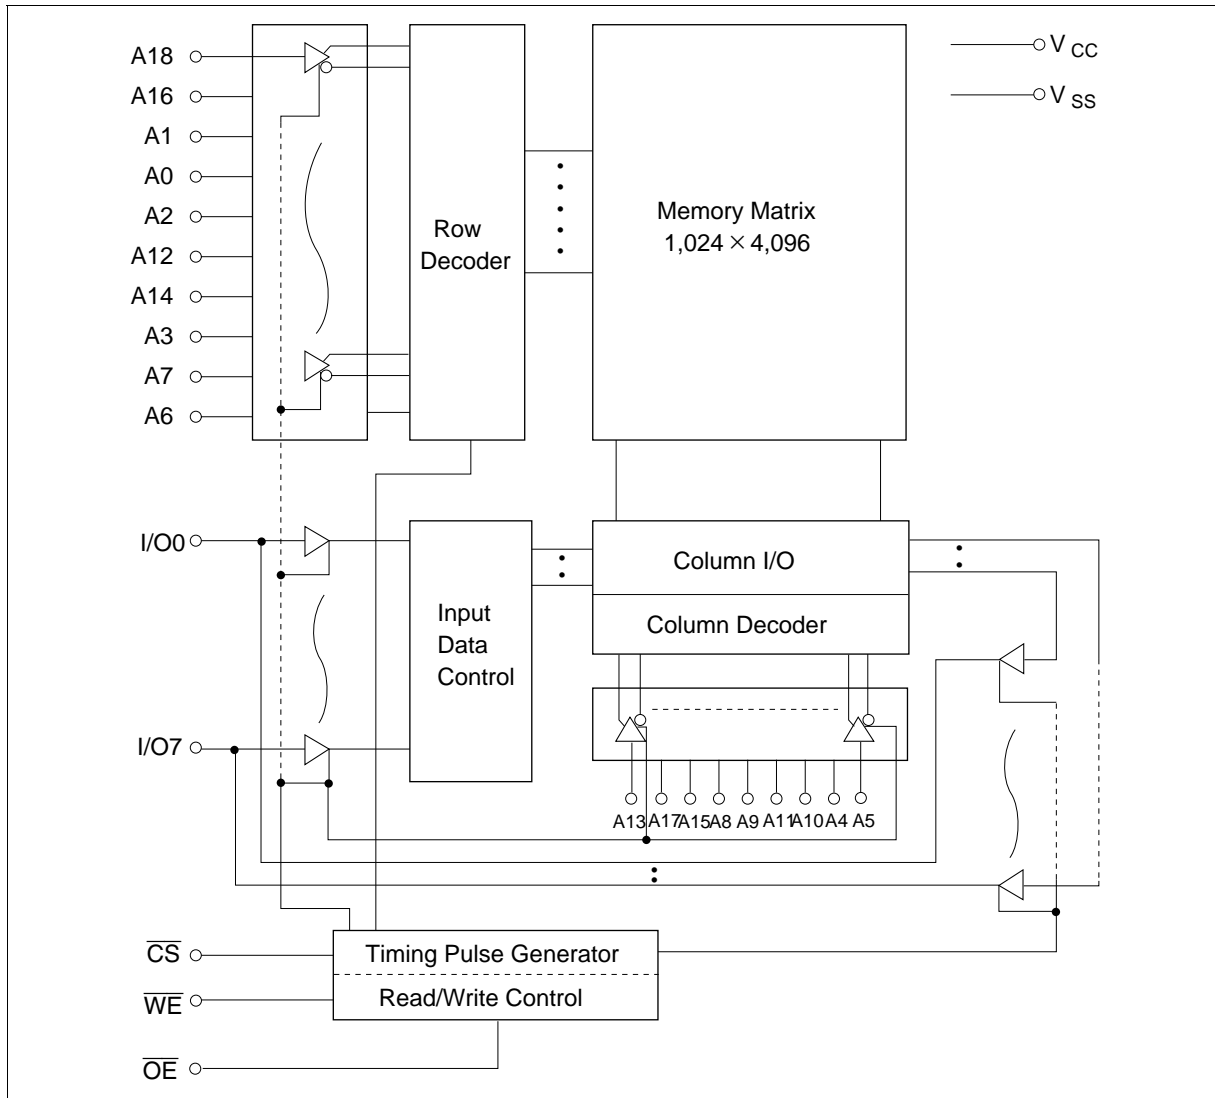

Function Table

| \overline{WE} | \overline{CS} | \overline{OE} | Mode | V_{CC} current | Dout pin | Ref. cycle |
|-----------------|-----------------|-----------------|----------------|-------------------|----------|-----------------|
| × | H | × | Not selected | I_{SB}, I_{SB1} | High-Z | — |
| H | L | H | Output disable | I_{CC} | High-Z | — |
| H | L | L | Read | I_{CC} | Dout | Read cycle |
| L | L | H | Write | I_{CC} | Din | Write cycle (1) |
| L | L | L | Write | I_{CC} | Din | Write cycle (2) |

Note: ×: H or L

Absolute Maximum Ratings

| Parameter | Symbol | Value | Unit |
|---|------------|--|------|
| Power supply voltage | V_{CC} | -0.5 to +4.6 | V |
| Voltage on any pin relative to V_{SS} | V_T | -0.5 ^{*1} to $V_{CC} + 0.5$ ^{*2} | V |
| Power dissipation | P_T | 1.0 | W |
| Operating temperature | T_{opr} | -40 to +85 | °C |
| Storage temperature | T_{stg} | -55 to +125 | °C |
| Storage temperature under bias | T_{bias} | -40 to +85 | °C |

Notes: 1. -3.0 V for pulse half-width ≤ 30 ns

2. Maximum voltage is 4.6 V

Recommended DC Operating Conditions ($T_a = -40$ to $+85^\circ\text{C}$)

| Parameter | Symbol | Min | Typ | Max | Unit |
|--------------------|----------|--------------------|-----|----------------|------|
| Supply voltage | V_{CC} | 3.0 | 3.3 | 3.6 | V |
| | V_{SS} | 0 | 0 | 0 | V |
| Input high voltage | V_{IH} | 2.4 | — | $V_{CC} + 0.3$ | V |
| Input low voltage | V_{IL} | -0.3 ^{*1} | — | 0.6 | V |

Note: 1. -3.0 V for pulse half-width ≤ 30 ns

DC Characteristics ($T_a = -40$ to $+85^\circ\text{C}$, $V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$, $V_{SS} = 0 \text{ V}$)

| Parameter | Symbol | Min | Typ* ¹ | Max | Unit | Test conditions |
|--------------------------------------|------------|----------------|-------------------|-----------|---------------|--|
| Input leakage current | $ I_{LI} $ | — | — | 1 | μA | $V_{in} = V_{SS}$ to V_{CC} |
| Output leakage current | $ I_{LO} $ | — | — | 1 | μA | $\overline{CS} = V_{IH}$ or $\overline{OE} = V_{IH}$ or $\overline{WE} = V_{IL}$, $V_{IO} = V_{SS}$ to V_{CC} |
| Operating power supply current: DC | I_{CC} | — | — | 10 | mA | $\overline{CS} = V_{IL}$, others = V_{IH}/V_{IL} , $I_{IO} = 0 \text{ mA}$ |
| Operating power supply current | I_{CC1} | — | — | 45 | mA | Min cycle, duty = 100% $\overline{CS} = V_{IL}$, others = V_{IH}/V_{IL} $I_{IO} = 0 \text{ mA}$ |
| Operating power supply current | I_{CC2} | — | 5 | 10 | mA | Cycle time = $1 \mu\text{s}$, duty = 100% $I_{IO} = 0 \text{ mA}$, $\overline{CS} \leq 0.2 \text{ V}$ $V_{IH} \geq V_{CC} - 0.2 \text{ V}$, $V_{IL} \leq 0.2 \text{ V}$ |
| Standby power supply current: DC | I_{SB} | — | 0.1 | 0.3 | mA | $\overline{CS} = V_{IH}$ |
| Standby power supply current (1): DC | I_{SB1} | — | 1^{*2} | 40^{*2} | μA | $V_{in} \geq 0 \text{ V}$, $\overline{CS} \geq V_{CC} - 0.2 \text{ V}$ |
| Output low voltage | V_{OL} | — | — | 0.4 | V | $I_{OL} = 2.0 \text{ mA}$ |
| | | — | — | 0.2 | V | $I_{OL} = 100 \mu\text{A}$ |
| Output high voltage | V_{OH} | $V_{CC} - 0.2$ | — | — | V | $I_{OH} = -100 \mu\text{A}$ |
| | | 2.4 | — | — | V | $I_{OH} = -2.0 \text{ mA}$ |

Note: 1. Typical values are at $V_{CC} = 3.3 \text{ V}$, $T_a = +25^\circ\text{C}$ and specified loading, and not guaranteed.
2. This characteristics is guaranteed only for L-version.

Capacitance ($T_a = +25^\circ\text{C}$, $f = 1 \text{ MHz}$)


| Parameter | Symbol | Typ | Max | Unit | Test conditions |
|--|----------|-----|-----|-------------|------------------------|
| Input capacitance* ¹ | C_{in} | — | 8 | pF | $V_{in} = 0 \text{ V}$ |
| Input/output capacitance* ¹ | C_{IO} | — | 10 | pF | $V_{IO} = 0 \text{ V}$ |

Note: 1. This parameter is sampled and not 100% tested.

AC Characteristics ($T_a = -40$ to $+85^\circ\text{C}$, $V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$, unless otherwise noted.)

Test Conditions

- Input pulse levels: 0.4 V to 2.4 V
- Input rise and fall time: 5 ns
- Input timing reference levels: 1.4 V
- Output timing reference level: 0.8 V/2.0 V
- Output load (Including scope & jig)



Read Cycle

| Parameter | Symbol | HM62W8512BI | | | | Unit | Notes |
|--------------------------------------|-----------|-------------|-----|-----|-----|------|-------|
| | | -7 | | -8 | | | |
| | | Min | Max | Min | Max | | |
| Read cycle time | t_{RC} | 70 | — | 85 | — | ns | |
| Address access time | t_{AA} | — | 70 | — | 85 | ns | |
| Chip select access time | t_{CO} | — | 70 | — | 85 | ns | |
| Output enable to output valid | t_{OE} | — | 35 | — | 45 | ns | |
| Chip selection to output in low-Z | t_{LZ} | 10 | — | 10 | — | ns | 2 |
| Output enable to output in low-Z | t_{OLZ} | 5 | — | 5 | — | ns | 2 |
| Chip deselection to output in high-Z | t_{HZ} | 0 | 30 | 0 | 35 | ns | 1, 2 |
| Output disable to output in high-Z | t_{OHZ} | 0 | 30 | 0 | 35 | ns | 1, 2 |
| Output hold from address change | t_{OH} | 10 | — | 10 | — | ns | |


Write Cycle

| Parameter | Symbol | HM62W8512BI | | | | Unit | Notes |
|-------------------------------------|-----------|-------------|-----|-----|-----|------|---------|
| | | -7 | | -8 | | | |
| | | Min | Max | Min | Max | | |
| Write cycle time | t_{WC} | 70 | — | 85 | — | ns | |
| Chip selection to end of write | t_{CW} | 60 | — | 75 | — | ns | 4 |
| Address setup time | t_{AS} | 0 | — | 0 | — | ns | 5 |
| Address valid to end of write | t_{AW} | 60 | — | 75 | — | ns | |
| Write pulse width | t_{WP} | 50 | — | 55 | — | ns | 3, 12 |
| Write recovery time | t_{WR} | 0 | — | 0 | — | ns | 6 |
| \overline{WE} to output in high-Z | t_{WHZ} | 0 | 30 | 0 | 35 | ns | 1, 2, 7 |
| Data to write time overlap | t_{DW} | 30 | — | 35 | — | ns | |
| Data hold from write time | t_{DH} | 0 | — | 0 | — | ns | |
| Output active from output in high-Z | t_{OW} | 5 | — | 5 | — | ns | 2 |
| Output disable to output in high-Z | t_{OHZ} | 0 | 30 | 0 | 35 | ns | 1, 2, 7 |


- Notes:
- t_{HZ} , t_{OHZ} and t_{WHZ} are defined as the time at which the outputs achieve the open circuit conditions and are not referred to output voltage levels.
 - This parameter is sampled and not 100% tested.
 - A write occurs during the overlap (t_{WP}) of a low \overline{CS} and a low \overline{WE} . A write begins at the later transition of \overline{CS} going low or \overline{WE} going low. A write ends at the earlier transition of \overline{CS} going high or \overline{WE} going high. t_{WP} is measured from the beginning of write to the end of write.
 - t_{CW} is measured from \overline{CS} going low to the end of write.
 - t_{AS} is measured from the address valid to the beginning of write.
 - t_{WR} is measured from the earlier of \overline{WE} or \overline{CS} going high to the end of write cycle.
 - During this period, I/O pins are in the output state so that the input signals of the opposite phase to the outputs must not be applied.
 - If the \overline{CS} low transition occurs simultaneously with the \overline{WE} low transition or after the \overline{WE} transition, the output remain in a high impedance state.
 - Dout is the same phase of the write data of this write cycle.
 - Dout is the read data of next address.
 - If \overline{CS} is low during this period, I/O pins are in the output state. Therefore, the input signals of the opposite phase to the outputs must not be applied to them.
 - In the write cycle with \overline{OE} low fixed, t_{WP} must satisfy the following equation to avoid a problem of data bus contention. $t_{WP} \geq t_{DW} \text{ min} + t_{WHZ} \text{ max}$

Timing Waveforms


Read Timing Waveform ($\overline{WE} = V_{IH}$)

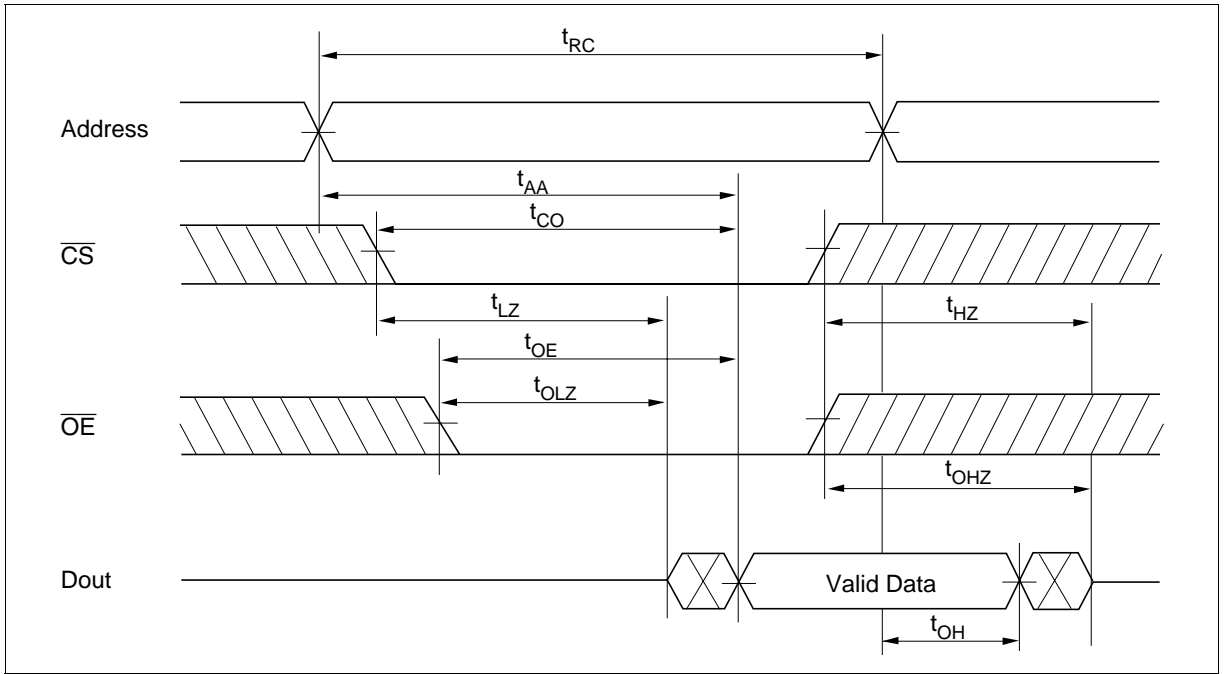

Write Timing Waveform (1) (\overline{OE} Clock)

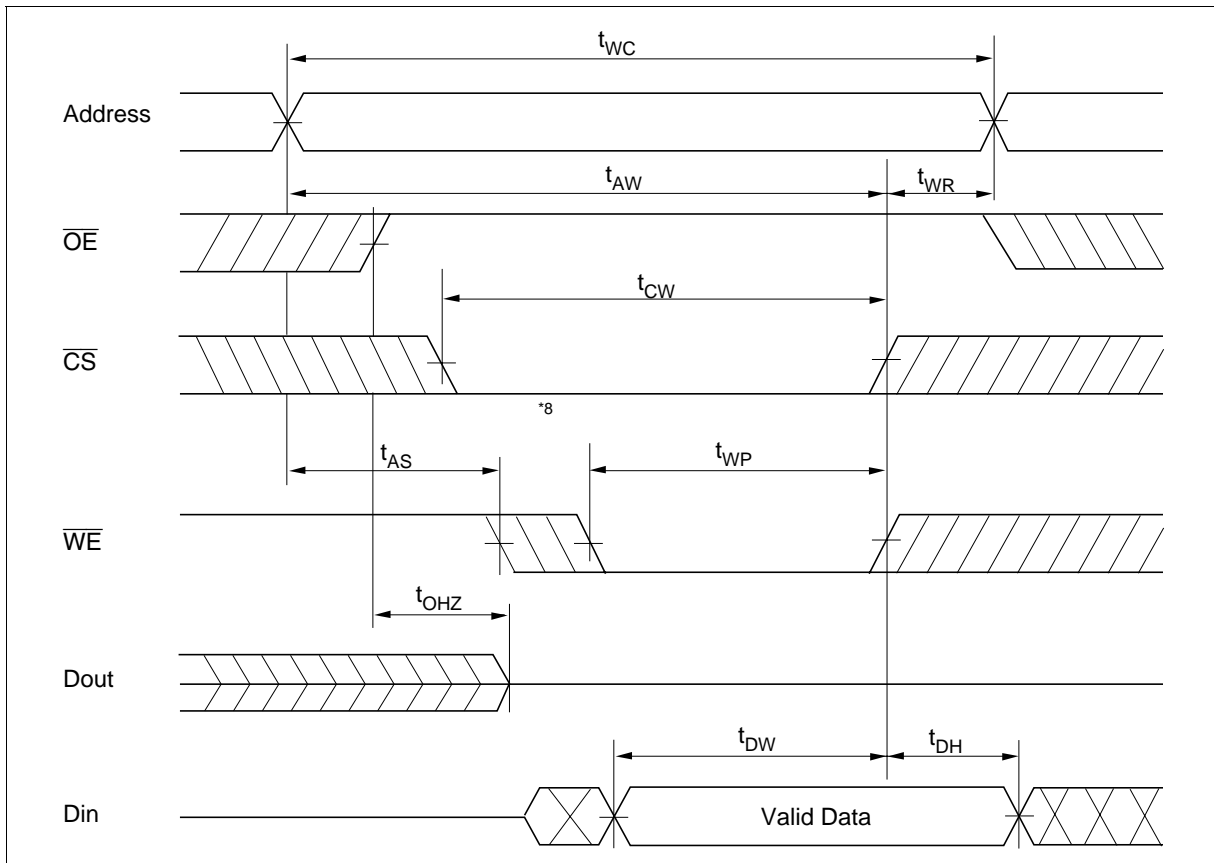

Write Timing Waveform (2) (\overline{OE} Low Fixed)

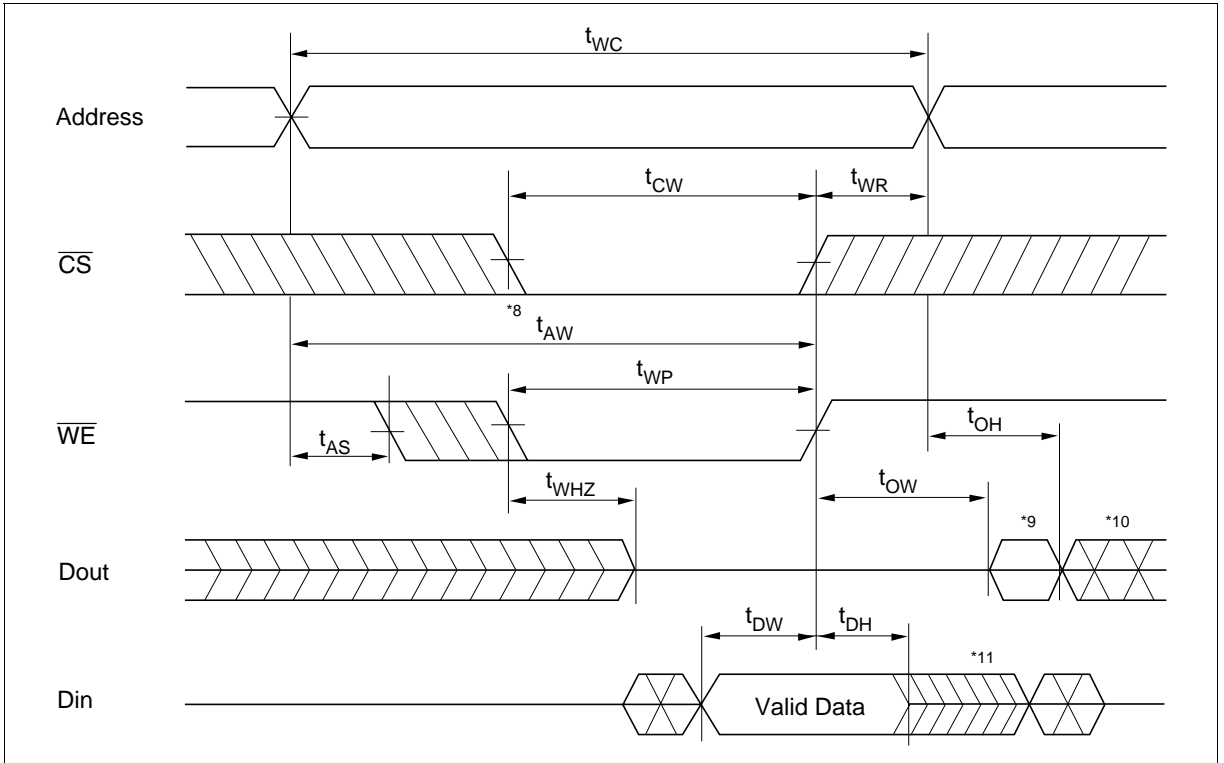

Low V_{CC} Data Retention Characteristics ($T_a = -40$ to $+85^\circ\text{C}$)

| Parameter | Symbol | Min | Typ | Max | Unit | Test conditions*2 |
|--------------------------------------|------------|---------------|------------|-----------|---------------|---|
| V_{CC} for data retention | V_{DR} | 2 | — | — | V | $\overline{CS} \geq V_{CC} - 0.2 \text{ V}$, $V_{in} \geq 0 \text{ V}$ |
| Data retention current | I_{CCDR} | — | 0.8^{*3} | 20^{*1} | μA | $V_{CC} = 3.0 \text{ V}$, $V_{in} \geq 0 \text{ V}$ $\overline{CS} \geq V_{CC} - 0.2 \text{ V}$ |
| Chip deselect to data retention time | t_{CDR} | 0 | — | — | ns | See retention waveform |
| Operation recovery time | t_R | t_{RC}^{*4} | — | — | ns | |


Notes: 1. For L-version and $10 \mu\text{A}$ (max.) at $T_a = -40$ to $+40^\circ\text{C}$.

2. \overline{CS} controls address buffer, \overline{WE} buffer, \overline{OE} buffer, and Din buffer. In data retention mode, V_{in} levels (address, \overline{WE} , \overline{OE} , I/O) can be in the high impedance state.

3. Typical values are at $V_{CC} = 3.0 \text{ V}$, $T_a = +25^\circ\text{C}$ and specified loading, and not guaranteed.

4. t_{RC} = read cycle time.

Low V_{CC} Data Retention Timing Waveform (\overline{CS} Controlled)





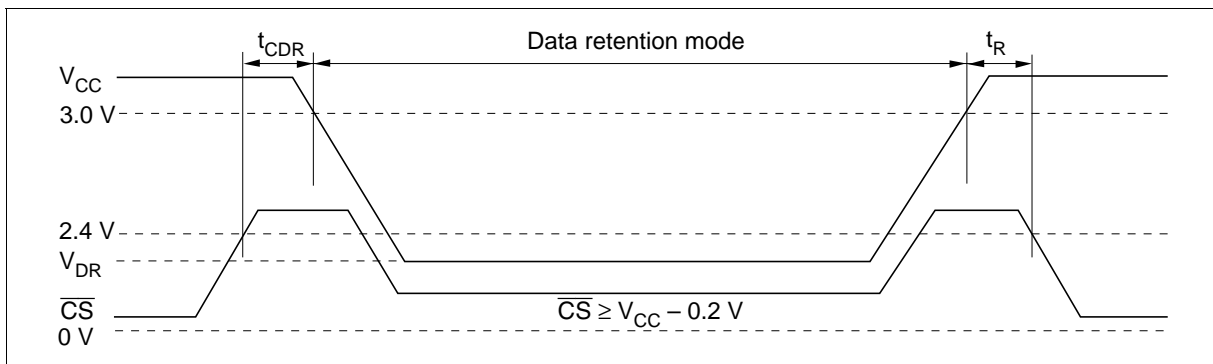


HM62W8512BI Series

Package Dimensions

HM62W8512BLTTI Series (TTP-32D)

Unit: mm

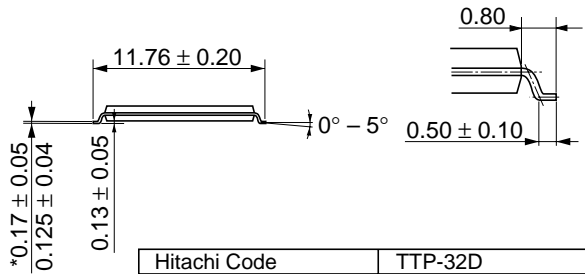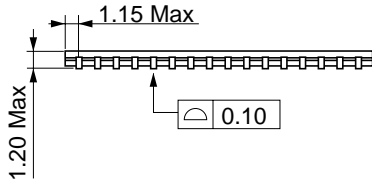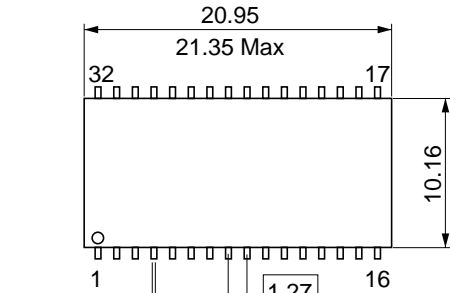

*Dimension including the plating thickness
Base material dimension

| | |
|--------------------------|----------|
| Hitachi Code | TTP-32D |
| JEDEC | Conforms |
| EIAJ | — |
| Weight (reference value) | 0.51 g |

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits,
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan
Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

| | | |
|-----|------------------|---|
| URL | NorthAmerica | : http://semiconductor.hitachi.com/ |
| | Europe | : http://www.hitachi-eu.com/hel/ecg |
| | Asia (Singapore) | : http://www.has.hitachi.com.sg/grp3/sicd/index.htm |
| | Asia (Taiwan) | : http://www.hitachi.com.tw/E/Product/SICD_Frame.htm |
| | Asia (HongKong) | : http://www.hitachi.com.hk/eng/bo/grp3/index.htm |
| | Japan | : http://www.hitachi.co.jp/Sicd/indx.htm |

For further information write to:

Hitachi Semiconductor
(America) Inc.
179 East Tasman Drive,
San Jose, CA 95134
Tel: <1>(408) 433-1990
Fax: <1>(408) 433-0223

Hitachi Europe GmbH
Electronic components Group
Dornacher Straße 3
D-85622 Feldkirchen, Munich
Germany
Tel: <49> (89) 9 9180-0
Fax: <49> (89) 9 29 30 00

Hitachi Europe Ltd.
Electronic Components Group.
Whitebrook Park
Lower Cookham Road
Maidenhead
Berkshire SL6 8YA, United Kingdom
Tel: <44> (1628) 585000
Fax: <44> (1628) 778322

Hitachi Asia Pte. Ltd.
16 Collyer Quay #20-00
Hitachi Tower
Singapore 049318
Tel: 535-2100
Fax: 535-1533

Hitachi Asia Ltd.
Taipei Branch Office
3F, Hung Kuo Building, No.167,
Tun-Hwa North Road, Taipei (105)
Tel: <886> (2) 2718-3666
Fax: <886> (2) 2718-8180

Hitachi Asia (Hong Kong) Ltd.
Group III (Electronic Components)
7/F., North Tower, World Finance Centre,
Harbour City, Canton Road, Tsim Sha Tsui,
Kowloon, Hong Kong
Tel: <852> (2) 735 9218
Fax: <852> (2) 730 0281
Telex: 40815 HITEC HX

Copyright © Hitachi, Ltd., 1998. All rights reserved. Printed in Japan.

Revision Record

| Rev. | Date | Contents of Modification | Drawn by | Approved by |
|------|---------------|--------------------------|----------|-------------|
| 1.0 | Jul. 13, 1999 | Initial issue | | |
