

**LA3390**

3021B

Monolithic Linear IC

## PLL FM MPX Demodulator with Post Amplifier

©1978

The LA3390 is a multifunctional MPX demodulator IC of a new type for use in FM stereo tuner applications. It has both FM input pin and AM input pin, performs the accessory function of output select and muting operation by means of the control pins as well as the FM MPX demodulation function, and meets electronic tuning requirements.

**Functions**

- . PLL MPX stereo demodulator
- . Gain variable type post amp
- . FM-AM select
- . Muting during FM-AM switchover
- . Muting
- . VCO stop and forced monaural

**Features**

- . Low distortion: 0.02% typ./mono 1kHz 300mV input.
- . High S/N: 84dB typ./mono 300mV input.
- . Good ripple rejection of power supply: 40dB typ.
- . High voltage gain: Approximately 9dB/FM, approximately 15dB/AM at standard circuit constants.
- . Wide dynamic range: Distortion 1.0% or less at mono 1000mV, 1kHz input.
- . Separation adjustable.

**Maximum Ratings at Ta=25°C**

		unit
Maximum Supply Voltage	V <sub>CC</sub> max	16 V
Lamp Drive Current	I <sub>L</sub> max	40 mA
Allowable Power Dissipation	P <sub>d</sub> max	550 mW
Operating Temperature	T <sub>opg</sub>	-20 to +75 °C
Storage Temperature	T <sub>stg</sub>	-40 to +125 °C


**Recommended Operating Conditions at Ta=25°C**

		unit
Supply Voltage	V <sub>CC</sub>	10 to 14 V
Input Signal Voltage	V <sub>i</sub>	300 mV

**Operating Characteristics at Ta=25°C, V<sub>CC</sub>=12V, Input=300mV, f=1kHz, L+R=90%, pilot=10%, specified test circuit**

		min	typ	max	unit
Quiescent Current	I <sub>cc0</sub>	24	32	mA	
Ripple Rejection of Power Supply			40		dB
Input Resistance	r <sub>i</sub>	15k	20k		ohm

Case Outline 3021B-D20SIC  
(unit:mm)

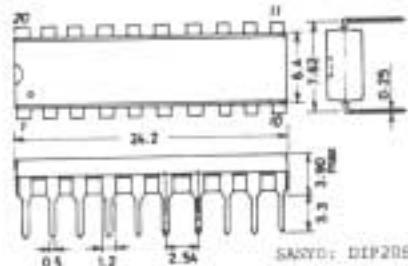

			min	typ	max	unit
Channel Separation	Sep	f=100Hz f=1kHz f=10kHz		45 40 45		dB dB dB
Stereo Distortion	THD <sub>dst</sub>	f=100Hz, main f=1kHz, main f=10kHz, main		0.05 0.05 0.2	0.15	% % %
Monaural Distortion	THD <sub>mono</sub>	Mono signal input		0.02	0.1	%
AM Distortion	THD <sub>AM</sub>	Pin 2 input 150mV		0.02	0.1	%
Allowable Input Level	v <sub>in</sub> <sup>max</sup>	FM THD 1% AM THD 1%	700 400			mV mV
S/N (FM)	-	Mono, Rg=5.1kohm, IHF BPF Mono, Rg=5.kohm, LPF only	80 84	86		dB dB
Muting Attenuation	ATT <sub>mute</sub>	V <sub>5</sub> =5V AM+FM FM+AM	70 70 70	80 80 80		dB dB dB
Muting ON Voltage	V <sub>mete</sub>	Pin 5, minimum of ON-voltage 3.4 (upper limit of distribution)				V
Muting OFF Voltage	V <sub>off</sub>	Pin 5, maximum of OFF- voltage(lower limit of distribution)			0.9	V
Muting Hysteresis	V <sub>hys</sub>	Pin 5		10		dB
AM FM Switchover Voltage	V <sub>AM-FM</sub>	Pin 6 AM+FM Pin 6 FM+AM			0.4	V V
Lamp Lighting Level Hysteresis	V <sub>L</sub> h <sub>y</sub>	Pilot level		1.1		mV
Capture Range	CR			3		dB
Output Level	V <sub>oFMmono</sub> V <sub>oAM</sub>	Mono signal input, pins 8,10 AM signal input, pins 8,10	600 1125	800 1500	1067 2005	mV mV
Carrier Leak	CL				31	dB
Output DC Variation		mono+ST ST+mute mono+mute AM+mute		30 30 30 30	85 85 85 85	mV mV mV mV
VCO Stop Voltage		Pin 11		6	11	V
Channel Balance	CB				1.0	dB
SCA Rejection				80		dB

