

PC921 High Power OPIC Photocoupler

T-41-83


■ Features

1. Built-in base amplifier for power transistor drive
2. High power (I_{O1} : MAX. 0.5A (DC)
 $(I_{O2P}$: MAX. 2.0A (pulse))
3. High speed response
 $(t_{PHL}, t_{PLH}$: MAX. 5 μ s)
4. High sensitivity (I_{FLH} : MAX. 5mA)
5. UL recognized, file No. E64380

■ Applications

1. Inverter controlled air conditioners
2. Low capacitance general purpose inverter

■ Outline Dimensions (Unit : mm)

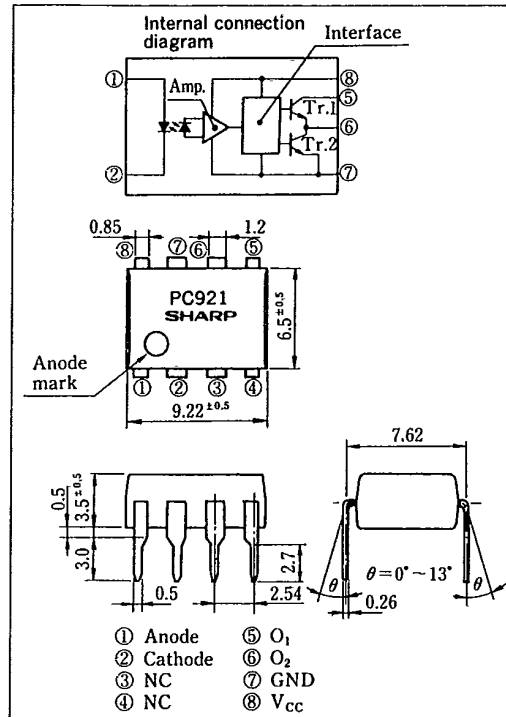

※ OPIC is a registered trademark of Sharp and stands for Optical IC. It has a light detecting element and signal processing circuitry integrated onto a single chip.

■ Absolute Maximum Ratings (Unless otherwise specified, $T_a = T_{opr}$)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I_F	25	mA
	*1 Reverse voltage	V_R	6	V
Output	Supply voltage	V_{CC}	15	V
	O_1 output current	I_{O1}	0.5	A
	*2 O_1 peak output current	I_{O1P}	1.0	A
	O_2 output current	I_{O2}	0.6	A
	*2 O_2 peak output current	I_{O2P}	2.0	A
	O_1 Output voltage	V_{O1}	15	V
	Power dissipation	P_O	500	mW
Total power dissipation		P_{tot}	550	mW
*3 Isolation voltage		V_{iso}	2,000	Vrms
Operating temperature		T_{opr}	-20 ~ +80	°C
Storage temperature		T_{stg}	-55 ~ +125	°C
*4 Soldering temperature		T_{sol}	260	°C

*1 $T_a = 25^\circ\text{C}$
 *2 Pulse width $\leq 5\mu\text{s}$, Duty ratio = 0.01
 *3 RH = 40 ~ 60%, AC for 1 minute, $T_a = 25^\circ\text{C}$
 *4 For 10 seconds

T-41-83

■ Electro-optical Characteristics

(Unless otherwise specified Ta = T_{opr})

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	Fig.	
Input	Forward voltage	V _{F1}	Ta = 25°C, I _F = 5mA	—	1.1	1.4	V	—	
		V _{F2}	Ta = 25°C, I _F = 0.2mA	0.6	0.9	—	V	—	
	Reverse current	I _R	Ta = 25°C, V _F = 3V	—	—	10	μA	—	
	Terminal capacitance	C _t	Ta = 25°C, V = 0, f = 1kHz	—	30	250	pF	—	
Operating supply voltage		V _{CC}	—	5.4	—	13	V	—	
Output	O ₁ low level output voltage	V _{O1L}	V _{CC} = 6V, I _{O1} = 0.4A, R _{L1} = 10Ω, I _F = 5mA	—	0.2	0.4	V	1	
	O ₂ high level output voltage	V _{O2H}	V _{CC} = 6V, I _{O2} = -0.4A, I _F = 5mA	4.5	5.0	—	V	2	
	O ₂ low level output voltage	V _{O2L}	V _{CC} = 6V, I _{O2} = 0.5A, I _F = 0	—	0.2	0.4	V	2	
	O ₁ leak current	I _{O1L}	V _{CC} = 13V, I _F = 0	—	—	200	μA	3	
	O ₂ leak current	I _{O2L}	V _{CC} = 13V, I _F = 5mA	—	—	200	μA	4	
	High level supply current	I _{CCH}	Ta = 25°C, V _{CC} = 6V, I _F = 5mA	—	9	13	mA	—	
			V _{CC} = 6V, I _F = 5mA	—	—	17	mA	—	
	Low level supply current	I _{CCL}	Ta = 25°C, V _{CC} = 6V, I _F = 0	—	11	15	mA	—	
			V _{CC} = 6V, I _F = 0	—	—	20	mA	—	
	*5 "Low→High" threshold input current		I _{FLH}	Ta = 25°C, V _{CC} = 6V, R _{L1} = 5Ω, R _{L2} = 10Ω	0.3	1.5	3.0	mA	5
			V _{CC} = 6V, R _{L1} = 5Ω, R _{L2} = 10Ω	0.2	—	5.0	mA	5	
Isolation resistance		R _{ISO}	Ta = 25°C, DC = 500V, RH = 40~60%	5 × 10 ¹⁰	10 ¹¹	—	Ω	—	
Transfer characteristics	Response time	"Low→High" propagation time	t _{PLH}	—	2	5	μs	6	
		"High→Low" propagation time	t _{PHL}	—	2	5	μs		
		Rise time	t _r	Ta = 25°C, V _{CC} = 6V, I _F = 5mA	—	0.2	1		μs
		Fall time	-t _f	R _{L1} = 5Ω, R _{L2} = 10Ω	—	0.1	1		μs
	Instantaneous common mode rejection voltage "Output : high level"		CM _H	Ta = 25°C, V _{CM} = 600V _(peak) , I _F = 5mA, R _{L1} = 470Ω, R _{L2} = 1kΩ, ΔV _{O2H} = 0.5V, V _{CC} = 6V	-1000	—	—	V/μs	7
Instantaneous common mode rejection voltage "Output : low level"		CM _L	Ta = 25°C, V _{CM} = 600V _(peak) , I _F = 0, R _{L1} = 470Ω, R _{L2} = 1kΩ, ΔV _{O2L} = 0.5V, V _{CC} = 6V	1000	—	—	V/μs	7	

*5 I_{FLH} represents forward current when output goes from low to high.

■ Truth Table

Input	Output	Tr.1	Tr.2
ON	High level	ON	OFF
OFF	Low level	OFF	ON

6

■ Test Circuit

Fig. 1

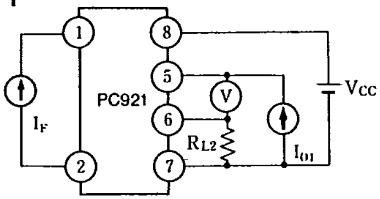


Fig. 2

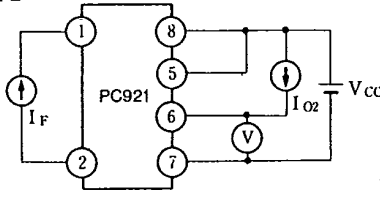


Fig. 3

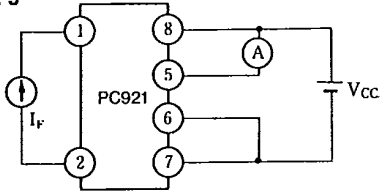


Fig. 4

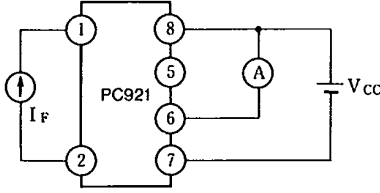


Fig. 5

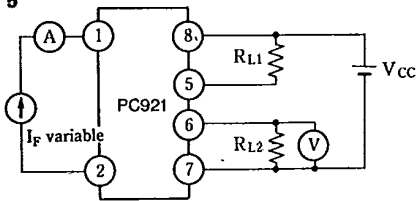


Fig. 6

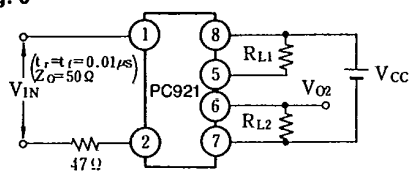


Fig. 7




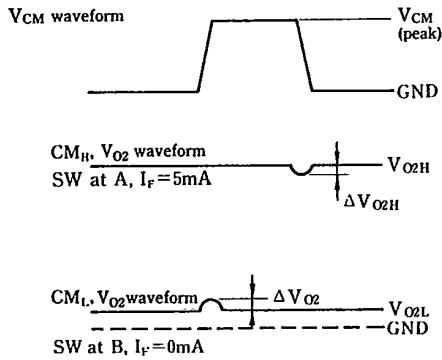


Fig. 8 Forward Current vs. Ambient Temperature

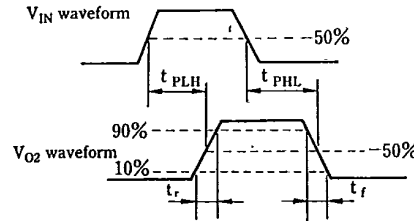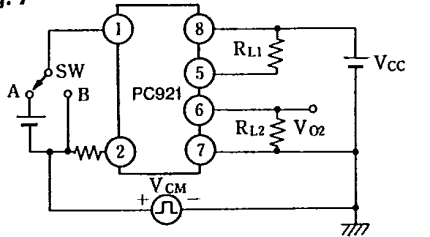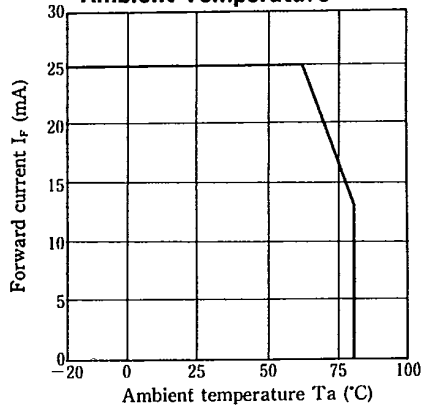

T-41-83

Fig. 9 Output Power Dissipation vs. Ambient Temperature

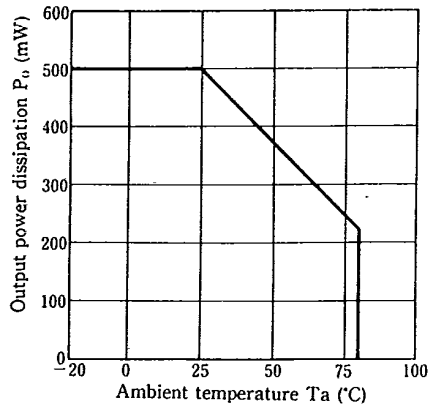


Fig. 10 Total Power Dissipation vs. Ambient Temperature

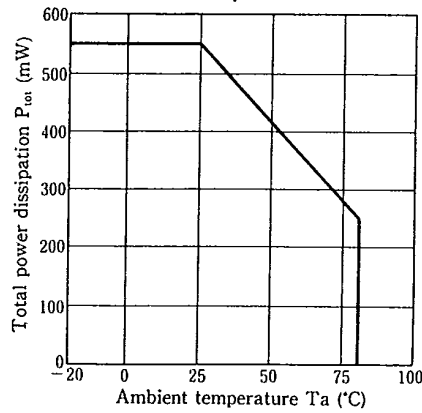


Fig. 11 Forward Current vs. Forward Voltage


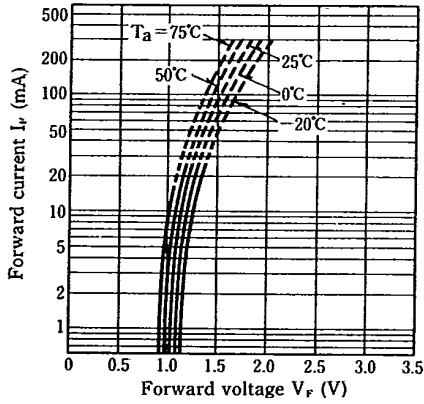


Fig. 12 "Low → High" Relative Threshold Input Current vs. Supply Voltage

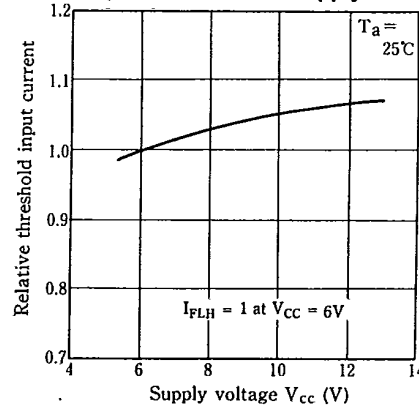

6

Fig. 13 "Low → High" Relative Threshold Input Current vs. Ambient Temperature

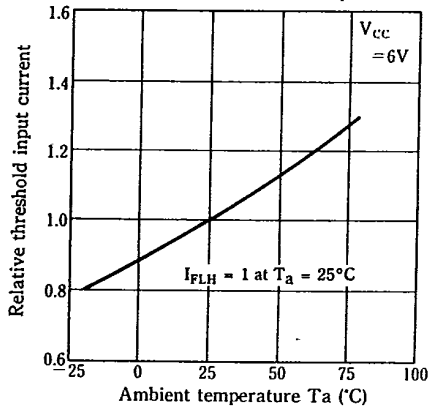


Fig. 14 O₁ Low Level Output Voltage vs. O₁ Output Current

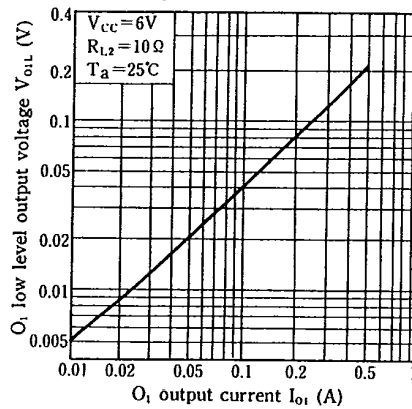


Fig. 15 O₁ Low Level Output Voltage vs. Ambient Temperature

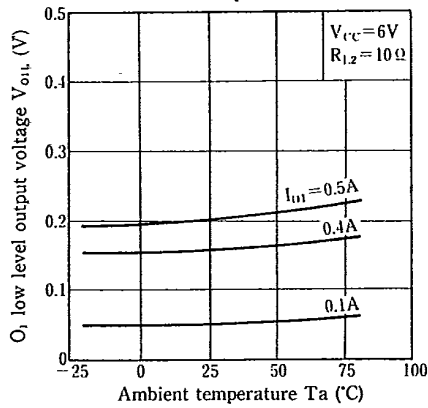


Fig. 16 O₂ High Level Output Voltage vs. O₂ Output Current

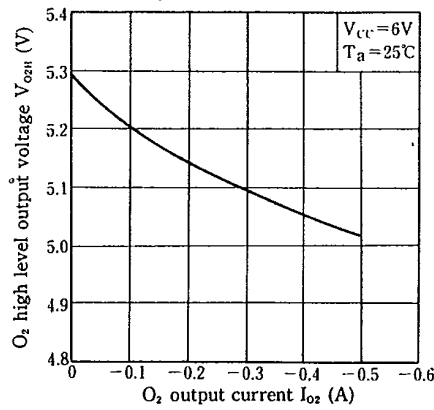


Fig. 17 O₂ High Level Output Voltage vs. Ambient Temperature

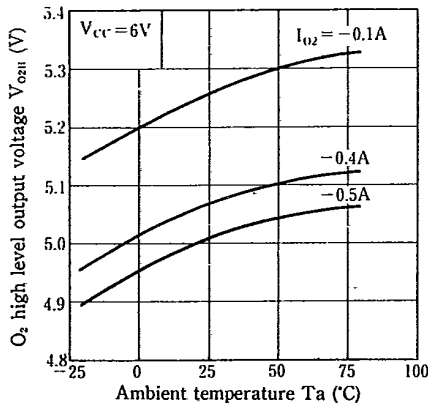


Fig. 18 O₂ Low Level Output Voltage vs. O₂ Output Current

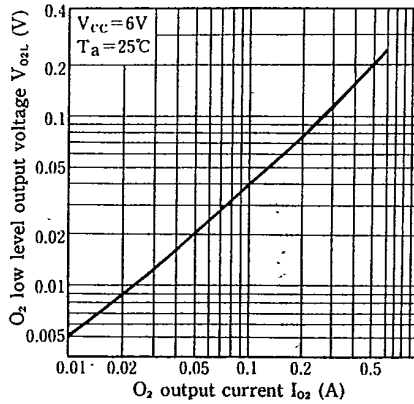


Fig. 19 O₂ Low Level Output Voltage vs. Ambient Temperature


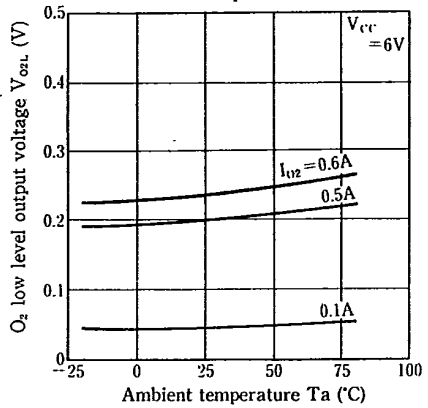


Fig. 20 High Level Supply Current vs. Supply Voltage

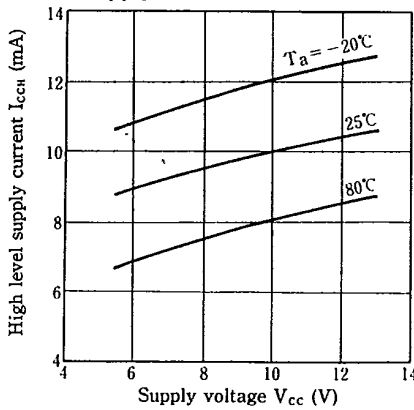

1-41-83

Fig. 21 Low Level Supply Current vs. Supply Voltage

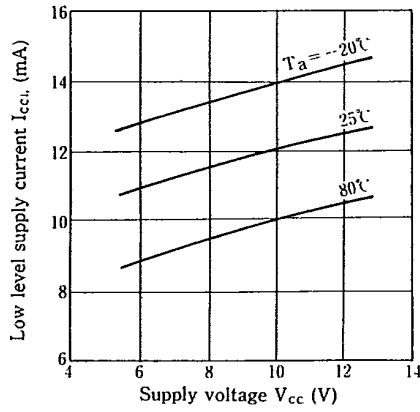


Fig. 22 Propagation Time vs. Forward Current

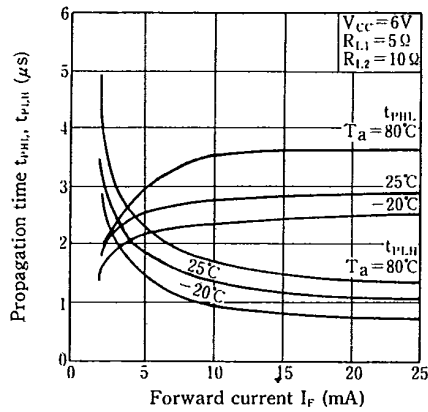


Fig. 23 Propagation Time vs. Ambient Temperature


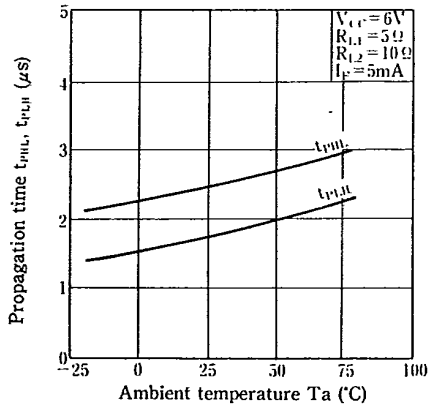


Fig. 24 O_2 Peak Output Current vs. O_2 Low Level Output Voltage

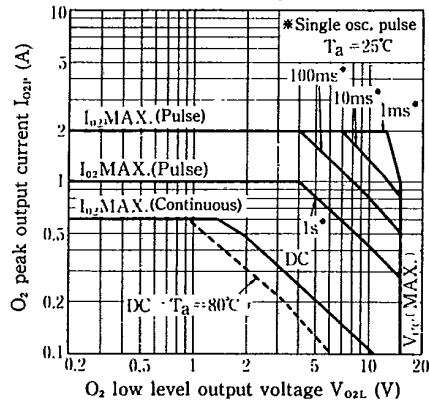

6