

élantec

HIGH PERFORMANCE ANALOG INTEGRATED CIRCUITS

EL2224C

Dual, 60 MHz, Unity Gain Stable, Operational Amplifier

Features

- Unity gain stable
- Wide bandwidth—60 MHz
- High slew rate—200 V/ μ s
- High power bandwidth ($\pm 10 V_{out}$) 3 MHz
- Large open loop gain 75 dB
- Low power—5 mA/amplifier
- Low input offset—1 mV typ.
- Wide supply voltage range $V_s = \pm 5V$ to $\pm 15V$
- Output short circuit protected

Applications

- High performance active filters
- Video and pulse amplifiers
- Local area networks
- Wideband amplifiers

Ordering Information



Part No.	Temp. Range	Package	Outline#
EL2224CN	0°C to +75°C	P-DIP	MDP0031
EL2224CM	0°C to +75°C	SOL	MDP0027

General Description

The EL2224 monolithic dual operational amplifier is an extension of Elantec's position in high speed analog products. This amplifier features unity gain stability, high slew rate and wide bandwidth, along with an excellent speed power relationship. The dual 60 MHz EL2224 consumes only 10 mA, making it ideal for video applications. The EL2224 has short circuit protected outputs and will operate from $\pm 5V$ to $\pm 15V$. It is fabricated using Elantec's Complementary Bipolar process which allows both fast PNP and NPN transistors to be manufactured on a single chip.

Elantec's products and facilities comply with MIL-I-45208A, and other applicable quality specifications. For information on Elantec's processing, see Elantec document, QRA-1: "Elantec's Processing, Monolithic Integrated Circuits".

Connection Diagrams



This product covered under U.S. Patent No. 4,837,523

EL2224C

Dual, 60 MHz, Unity Gain Stable, Operational Amplifier

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$)

Voltage Between V^+ and V^-	35V	Operational Temperature Range	0°C to $+75^\circ\text{C}$
Differential Input Voltage	$\pm 6\text{V}$	Storage Temperature Range	-65°C to $+150^\circ\text{C}$
Internal Power Dissipation	See Curves	Maximum Junction Temperature	
Peak Output Current	Short Circuit Protected	Plastic DIP, SOL	150°C
Output Short Circuit Duration (Note 1)	Continuous	Lead Temperature	
		DIP Package	300°C
		SOL Package	
		Vapor Phase (60 seconds)	215°C
		Infrared (15 seconds)	220°C

Important Note:

All parameters having Min/Max specifications are guaranteed. The Test Level column indicates the specific device testing actually performed during production and Quality Inspection. Kiantec performs most electrical tests using modern high-speed automatic test equipment, specifically the LTX77 Series system. Unless otherwise noted, all tests are pulsed tests, therefore $T_J = T_C = T_A$.

Test Level	Test Procedure
I	100% production tested and QA sample tested per QA test plan QCX0002.
II	100% production tested at $T_A = 25^\circ\text{C}$ and QA sample tested at $T_A = 25^\circ\text{C}$, T_{MAX} and T_{MIN} per QA test plan QCX0002.
III	QA sample tested per QA test plan QCX0002.
IV	Parameter is guaranteed (but not tested) by Design and Characterization Data.
V	Parameter is typical value at $T_A = 25^\circ\text{C}$ for information purposes only.

DC Electrical Characteristics $V_S = \pm 15\text{V}$; $R_L = 2\text{ k}\Omega$, unless otherwise specified

Parameter	Description	EL2224C				Units
		Min	Typ	Max	Test Level	
V_{OS}	Offset Voltage		0.5	5 8	I	mV
					III	mV
TCV_{OS}	Average Offset Voltage Drift		20		V	$\mu\text{V}/^\circ\text{C}$
I_B	Bias Current		1.5	4 6	I	μA
					III	μA
I_{OS}	Offset Current		0.2	2 3	I	μA
					III	μA
R_{IN}	Input Resistance		40		V	k Ω
C_{IN}	Input Capacitance		1		V	pF
V_{CM}	Common Mode Input Range	± 10	± 12		II	V
e_{IN}	Input Noise Voltage ($f = 1\text{ kHz}$, $R_G = 0\Omega$)		15		V	$\text{nV}/\sqrt{\text{Hz}}$
A_{VOL}	Large Signal Voltage Gain (Notes 2, 3)	4k 2.5k	6k		I	V/V
					III	V/V

EL2224C**Dual, 60 MHz, Unity Gain Stable, Operational Amplifier****DC Electrical Characteristics** $V_S = \pm 15V$; $R_L = 2\text{ k}\Omega$, unless otherwise specified — Contd.

Parameter	Description	EL2224C				Units
		Min	Typ	Max	Test Level	
CMRR	Common-Mode Rejection Ratio (Note 4)	60	80		II	dB
V_O	Output Voltage Swing	± 11	± 12.5		II	V
I_{SC}	Short Circuit Current		± 50	± 70	I	mA
R_O	Output Resistance		40		V	Ω
I_S	Supply Current		9.5	13	II	mA
PSRR	Power Supply Rejection Ratio (Note 5)	60	75		II	dB

AC Electrical Characteristics $V_S = \pm 15V$; $R_L = 2\text{ k}\Omega$, unless otherwise specified

Parameter	Description	EL2224C				Units
		Min	Typ	Max	Test Level	
f_u	Open Loop Unity Bandwidth (Note 6)		60		V	MHz
FPBW	Full Power Bandwidth (Notes 2, 7)	2.4	3.1		I	MHz
t_r	Rise Time (Note 8)		6		V	ns
OS	Overshoot (Note 8)		20		V	%
SR	Slew Rate (Note 8)	150	200		I	V/ μ s
t_s	Settling Time (Notes 9, 10) 10V Step to 0.05%		120		V	ns
Ch S_p	Channel Separation ($f = 10\text{ MHz}$)		70		V	dB

Note 1: A heat sink is required to keep the junction temperature below absolute maximum when the output is shorted.

Note 2: $V_O = \pm 10V$.Note 3: $R_L = 2\text{ k}\Omega$.Note 4: Two tests are performed. $V_{CM} = 0V$ to $+10V$ and $V_{CM} = 0$ to $-10V$.Note 5: Two tests are performed. $V_+ = 15V$, and V_- is changed from $-5V$ to $-15V$. $V_- = -15V$, and V_+ is changed from $+5V$ to $+15V$.Note 6: $V_O = 100\text{ mV}$.Note 7: Full Power Bandwidth guaranteed based on slew rate measurement using: $FPBW = \text{Slew Rate} / 2\pi V_{PEAK}$.

Note 8: Refer to Test Circuit section of data sheet.


Note 9: Settling time measurement are made with techniques in the following reference: "Take The Guesswork Out of Settling-Time Measurements," EDN September 19, 1985.

Note 10: $A_v = +1$, $R_L = 2\text{ k}\Omega$.


EL2224C

Dual, 60 MHz, Unity Gain Stable, Operational Amplifier

Typical Performance Curves

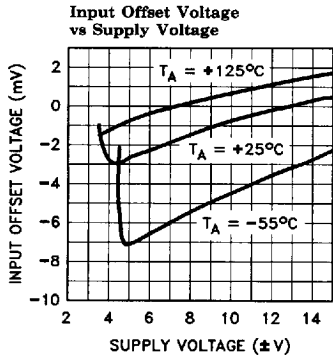


2224-4

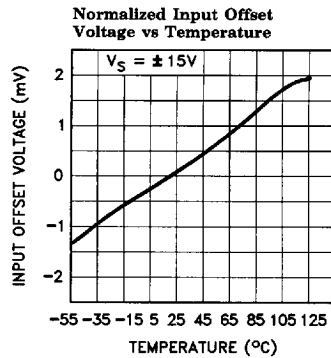


2224-5


1

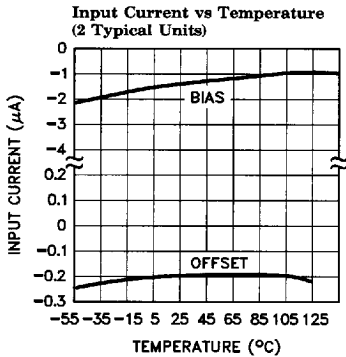


2224-6

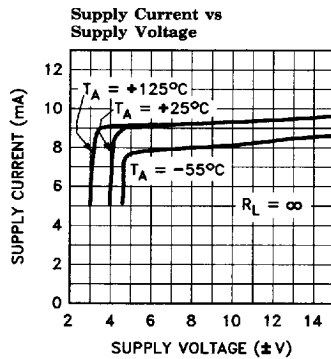

2224-7

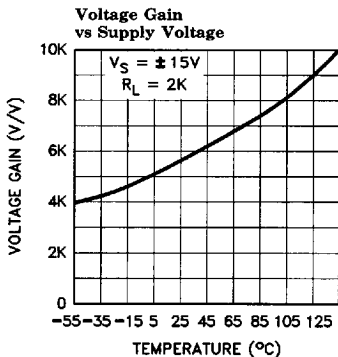

2224-8

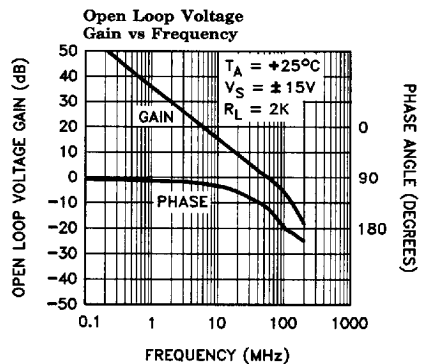


2224-9


EL2224C

Dual, 60 MHz, Unity Gain Stable, Operational Amplifier


Typical Performance Curves — Contd.

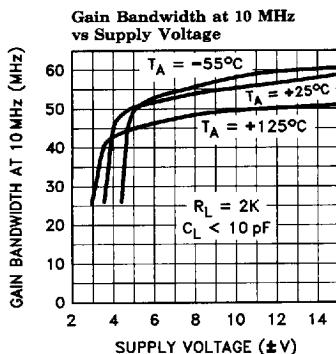


2224-10

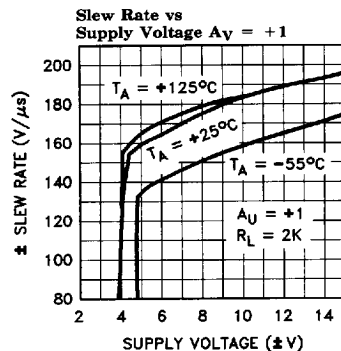


2224-11

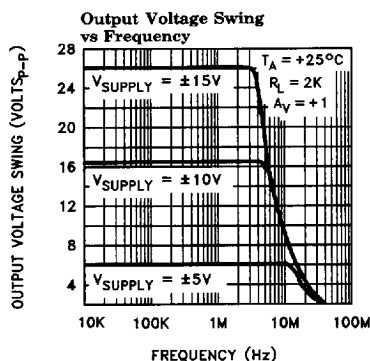


2224-12

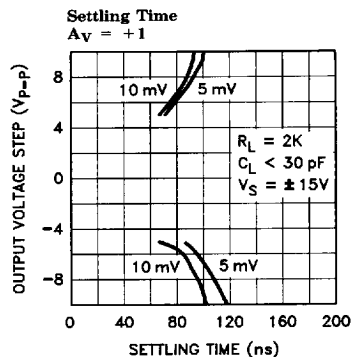

2224-13

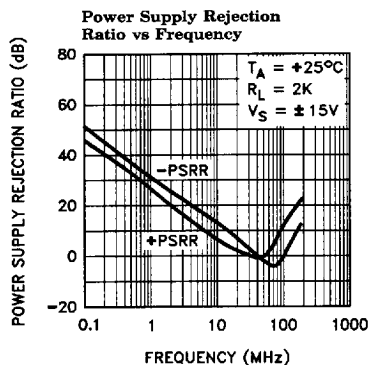

2224-14

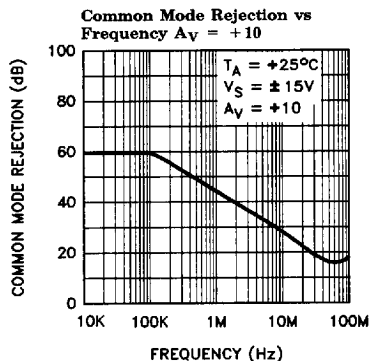


2224-15


EL2224C

Dual, 60 MHz, Unity Gain Stable, Operational Amplifier


Typical Performance Curves — Contd.

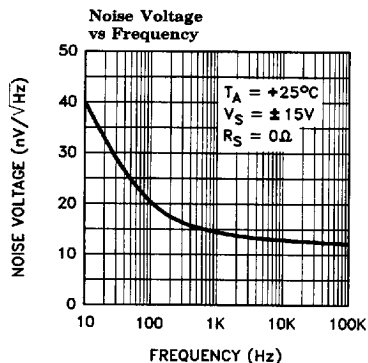

2224-16

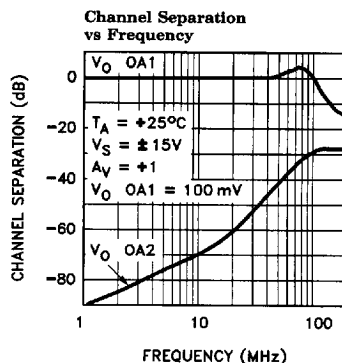


2224-17

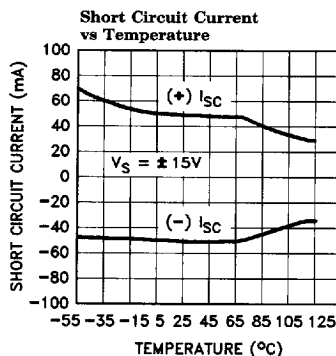

2224-18


Large Signal Response



$A_V = +1$
 $V_{IN} = \pm 5\text{V}$
 $V_O = \pm 5\text{V}$
 $R_L = 2\text{k}$

2224-19

Small Signal Response




$A_V = +1$
 $V_{IN} = \pm 100 \text{ mV}$
 $V_O = \pm 100 \text{ mV}$
 $R_L = 2\text{k}$

2224-20


EL2224C

Dual, 60 MHz, Unity Gain Stable, Operational Amplifier

Typical Performance Curves — Contd.

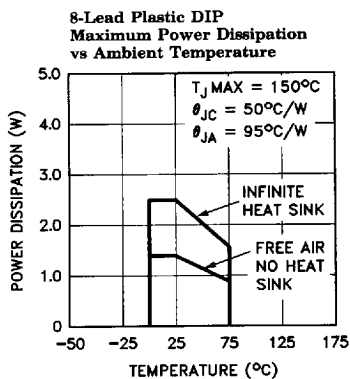


2224-22

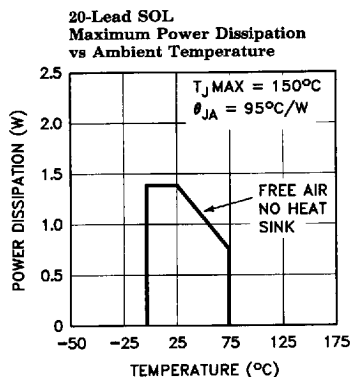

2224-24


Test Circuit



2224-27


$A_V = +1$
 $C_L \leq 10 \text{ pF}$ Scope Probe

Burn-In Circuit



2224-28

Pin numbers are for the 8-lead CerDIP.
Burn-in circuit is identical for all package types.




2224-29

EL2224C

Dual, 60 MHz, Unity Gain Stable, Operational Amplifier

EL2224C

Simplified Schematic (one amplifier)

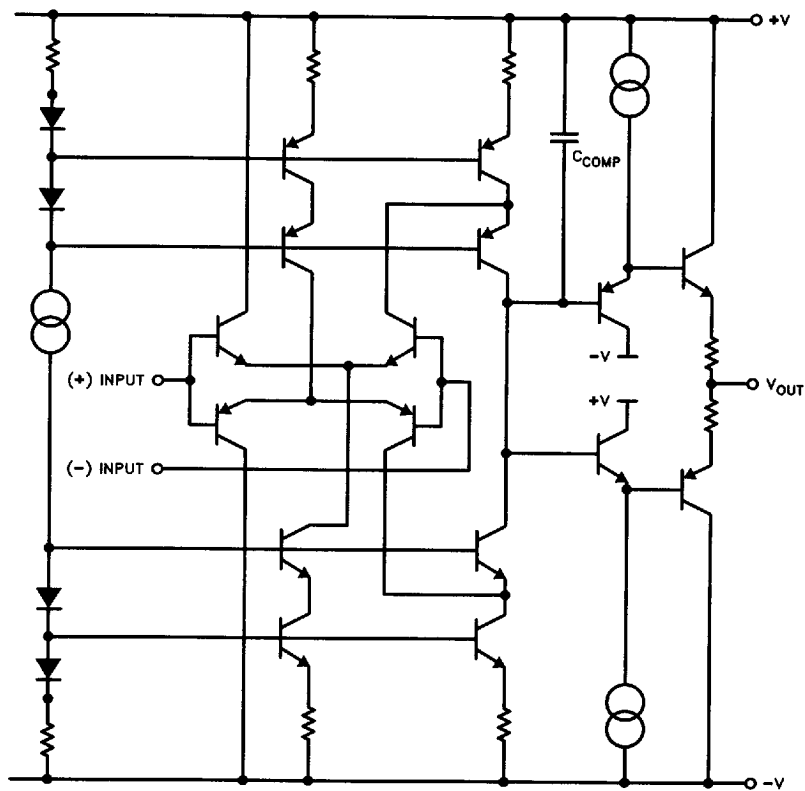

2224-25

EL2224C

Dual, 60 MHz, Unity Gain Stable, Operational Amplifier

EL2224 Macromodel

* Connections:

	+ input		- input		+ Vsupply		- Vsupply		output
*									
*									
*									
*									
*									

.subckt M2224

3 2 7 4 6

* Input stage

ie 37 4 4.5mA

r6 36 37 75

r7 38 37 75

rc1 7 30 75

rc2 7 39 75

q1 30 3 36 qn

q2 39 2 38 qna

ediff 33 0 39 30 2.6

rdiff 33 0 1Meg

* Compensation Section

ga 0 34 33 0 3m

rh 34 0 1Meg

ch 34 0 15pF

rc 34 40 300

cc 40 0 1pF

* Poles

ep 41 0 40 0 1

rpa 41 42 75

cpa 42 0 3pF

rpb 42 43 50

cpb 43 0 3pF

* Output Stage

ios1 7 50 0.5mA

ios2 51 4 0.5mA

q3 4 43 50 qp

q4 7 43 51 qn

q5 7 50 52 qn

q6 4 51 53 qp

ros1 52 6 25

ros2 6 53 25

* models

.model qn npn(is=800.0E-18 bf=350 tf=0.2nS)

.model qna npn(is=864E-18 bf=400 tf=0.2nS)


.model qp pnp(is=800E-18 bf=60 tf=0.2nS)

.ends

EL2224C

Dual, 60 MHz, Unity Gain Stable, Operational Amplifier

EL2224 Macromodel — Contd.

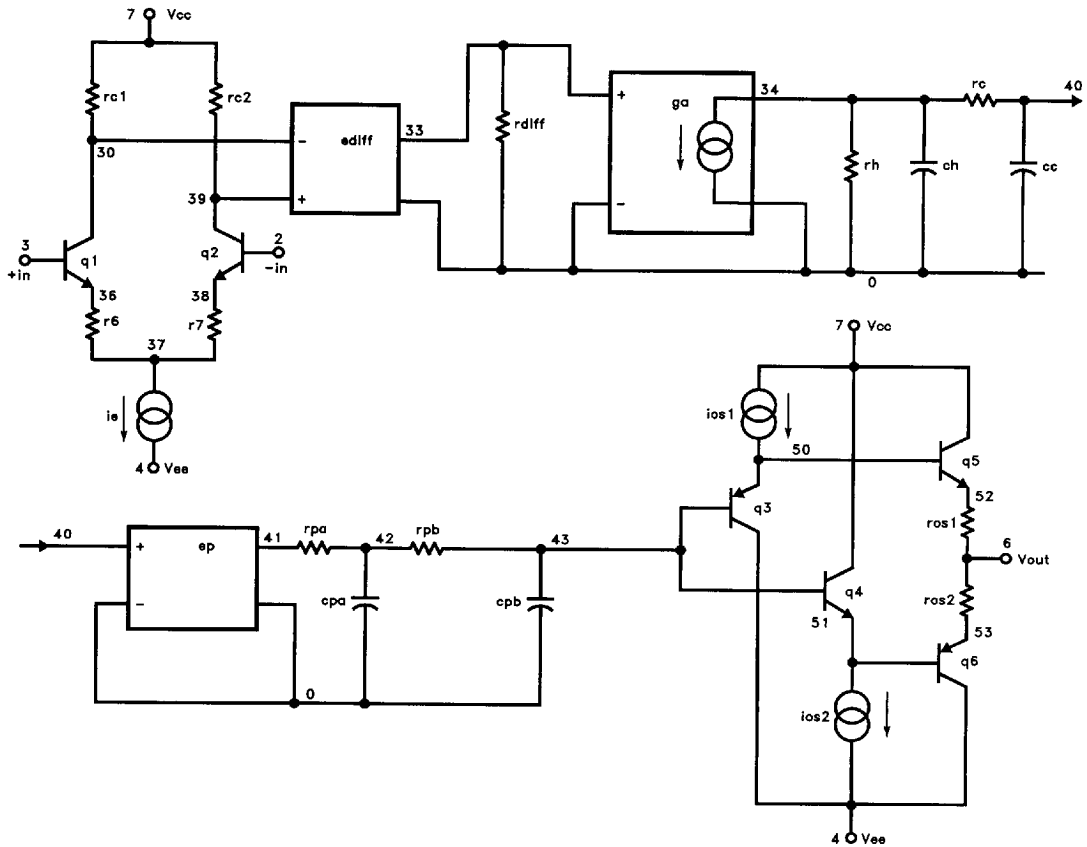

2224-30