

Input/Output Full-Swing High Output Current Quad C-MOS Operational Amplifier

■ GENERAL DESCRIPTION


The NJU7044 is a quad C-MOS operational amplifier permitting a full-swing input and output in full-swing under high load.

Based on C-MOS technology, there are excellent features such as high output current, low current consumption, low operating voltage, and very high input impedance.


■ FEATURES

- Operating Voltage: 2.2V to 5.5V
- Input/Output Full-Swing
- High Output Current: 40mA at $V_O=0V$
- Input Offset Voltage: $V_{IO}=10mV$ max.
- Wide Input Common Mode Voltage Range: V_{SS} to V_{DD}
- Operating Current: $I_{DD}=1.4mA$ typ. (at $V_{DD}=3V$)
- High Input Impedance: $1T\Omega$ Typ.
- Low Input Bias Current: $I_{IB}=1pA$ typ.
- Ground Sensing
- Tiny Package: DIP14, DMP14, SSOP14

■ PACKAGE OUTLINE



NJU7044D




NJU7044M



NJU7044V

■ PIN CONFIGURATION

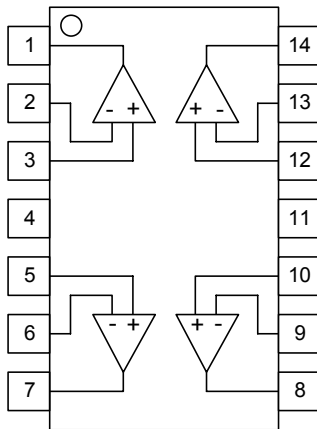

NJU7044D
NJU7044M
NJU7044V

Pin Function

- | | |
|-------------|--------------|
| 1. OUTPUT 1 | 8. OUTPUT 3 |
| 2. -INPUT 2 | 9. -INPUT 3 |
| 3. +INPUT 2 | 10. +INPUT 3 |
| 4. V_{DD} | 11. V_{SS} |
| 5. +INPUT 2 | 12. +INPUT 4 |
| 6. -INPUT 2 | 13. -INPUT 4 |
| 7. OUTPUT 2 | 14. OUTPUT 4 |

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{DD}	7	V
Common Mode Input Voltage Range	V_{ICM}	0 to 7 (Note 1)	V
Differential Input Voltage Range	V_{ID}	± 7	V
Power Dissipation	P_D	700 [DIP14] 300 [DMP14] 500 [DMP14] (Note 2) 660 [DMP14] (Note 3) 300 [SSOP14] 450 [SSOP14] (Note 2) 570 [SSOP14] (Note 3)	mW
Output Sink/Source Current for each one output terminal	I_{oport}	± 75 [DIP14, DMP14, SSOP14]	mA
Sum total of Output Sink/Source Current of all output terminal	I_{ototal}	180 [DIP14, DMP14, SSOP14] (Note 4)	mA
Operating Temperature Range	T_{opr}	-40 to +85	$^{\circ}C$
Storage Temperature Range	T_{stg}	-55 to +125	$^{\circ}C$

(Note 1) For supply voltage less than 7V, the absolute maximum input voltage is equal to the supply voltage.

(Note 2) On the PCB " EIA/JEDEC (76.2x11.43x1.6mm, two layers, FR-4) "

(Note 3) On the PCB " EIA/JEDEC (76.2x11.43x1.6mm, four layers, FR-4) "

(Note 4) It individually takes the absolute value of the sink current and the source current of each output terminal, and it is assumed the sum total.

Calculation type: $I_{ototal} = |I_{oport1}| + |I_{oport2}| + |I_{oport3}| + |I_{oport4}|$

(Note 5) Do not exceed "Power dissipation: P_D " in which power dissipation in IC is shown by the absolute maximum rating.

Refer to following Figure 1 and Figure 2 for a permissible loss when ambient temperature (T_a) is $T_a \geq 25^{\circ}C$.

Figure 1 : Power Dissipation - Ambient Temperature


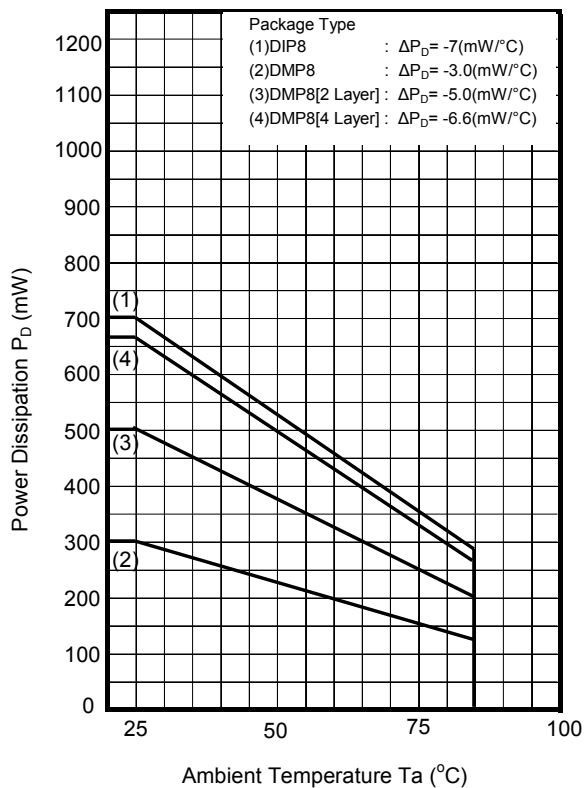


Figure 2 : Power Dissipation - Ambient Temperature

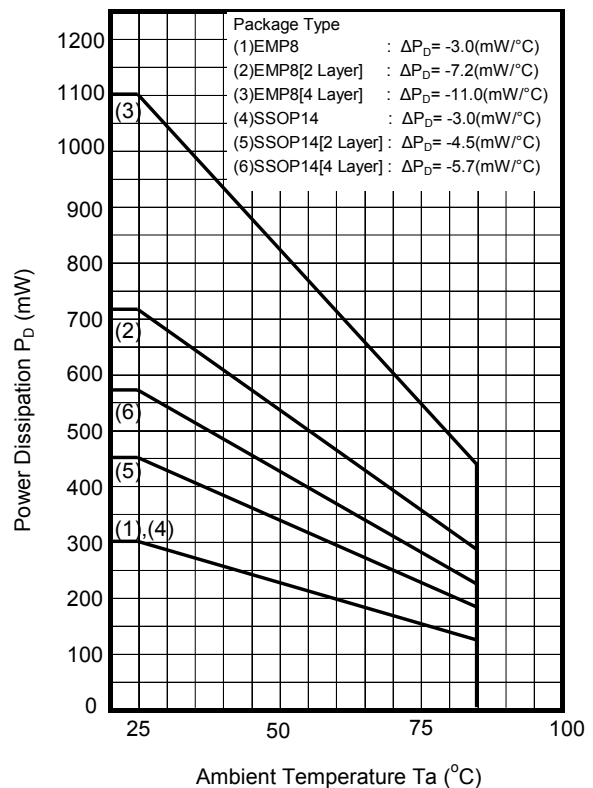

■ OPERATING VOLTAGE ($T_a = 25^{\circ}C$)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{DD}	2.2 to 5.5	V

■ ELECTRICAL CHARACTERISTICS

●DC CHARACTERISTICS

($V_{DD}=5V, T_a=25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	I_{DD}	No Signal Apply	-	1.8	2.8	mA
Input Offset Voltage	V_{IO}		-	-	10	mV
Input Bias Current	I_B		-	1	-	pA
Input Offset Current	I_{IO}		-	1	-	pA
Large Signal Voltage Gain	A_V	$R_L=10k\Omega$ to 2.5V, $V_O=2.5V\pm 2.4V$	70	90	-	dB
Common Mode Rejection Ratio	CMR	CMR+: $2.5V \leq V_{CM} \leq 5V$ CMR-: $0V \leq V_{CM} \leq 2.5V$ (Note 6)	44	60	-	dB
Supply Voltage Rejection Ratio	SVR	$4.0V \leq V_{DD} \leq 5.5V,$ $V_{CM}=V_{DD}/2$	55	85	-	dB
Output Voltage1	V_{OH1}	$R_L=10k\Omega$ to 2.5V	4.95	-	-	V
	V_{OL1}	$R_L=10k\Omega$ to 2.5V	-	-	0.05	V
Output Voltage2	V_{OH2}	$R_L=600\Omega$ to 2.5V	4.88	-	-	V
	V_{OL2}	$R_L=600\Omega$ to 2.5V	-	-	0.12	V
Output Source Current	I_{SOURCE}	$V_O=3.5V$ (Note 7)	50	-	-	mA
Output Sink Current	I_{SINK}	$V_O=1.5V$ (Note 7)	50	-	-	mA
Input Common Mode Voltage Range	V_{ICM}	CMR $\geq 44dB$	0	-	5	V

(Note 6) CMR is represented by either CMR+ or CMR- has lower value.

(Note 7) Please note the output current value to exceed neither I_{oport} nor I_{ototal} the absolute maximum rating.

●AC CHARACTERISTICS

($V_{DD}=5V, T_a=25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Unity Gain Bandwidth	GB	$R_L=10k\Omega$ to 2.5V	-	0.8	-	MHz
Total Harmonic Distortion	THD	$f=1kHz, V_O=0.7V_{rms}, A_V=+1,$ $R_L=10k\Omega$ to 2.5V	-	0.001	-	%
Equivalent Input Noise Voltage	V_{NI}	$f=1kHz$	-	40	-	nV/ \sqrt{Hz}
Amp to Amp Separation	CS	$f=1kHz, V_O=3V_{pp}$ $R_L=10k\Omega$ to 2.5V	-	120	-	dB

●TRANSIENT CHARACTERISTICS

($V_{DD}=5V, T_a=25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	$R_L=10k\Omega$ to 2.5V	-	0.8	-	V/ μs

NJU7044

■ ELECTRICAL CHARACTERISTICS

●DC CHARACTERISTICS

($V_{DD}=3V, T_a=25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	I_{DD}	No Signal Apply	-	1.4	2.4	mA
Input Offset Voltage	V_{IO}		-	-	10	mV
Input Bias Current	I_B		-	1	-	pA
Input Offset Current	I_{IO}		-	1	-	pA
Large Signal Voltage Gain	A_V	$R_L=10k\Omega$ to 1.5V, $V_O=1.5V\pm 1.4V$	70	90	-	dB
Common Mode Rejection Ratio	CMR	CMR+: $1.5V \leq V_{CM} \leq 3V$ CMR-: $0V \leq V_{CM} \leq 1.5V$ (Note 8)	42	60	-	dB
Supply Voltage Rejection Ratio	SVR	$2.7V \leq V_{DD} \leq 4.0V,$ $V_{CM}=V_{DD}/2$	50	80	-	dB
Output Voltage1	V_{OH1}	$R_L=10k\Omega$ to 1.5V	2.95	-	-	V
	V_{OL1}	$R_L=10k\Omega$ to 1.5V	-	-	0.05	V
Output Voltage2	V_{OH2}	$R_L=600\Omega$ to 1.5V	2.9	-	-	V
	V_{OL2}	$R_L=600\Omega$ to 1.5V	-	-	0.1	V
Output Source Current	I_{SOURCE}	$V_O=1.5V$	30	40	-	mA
Output Sink Current	I_{SINK}	$V_O=1.5V$	30	40	-	mA
Input Common Mode Voltage Range	V_{ICM}	CMR $\geq 42dB$	0	-	3	V

(Note 8) CMR is represented by either CMR+ or CMR- has lower value.

●AC CHARACTERISTICS

($V_{DD}=3V, T_a=25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Unity Gain Bandwidth	GB	$R_L=10k\Omega$ to 1.5V	-	0.8	-	MHz
Total Harmonic Distortion	THD	$f=1kHz, V_O=0.35V_{rms}, A_V=+1,$ $R_L=10k\Omega$ to 1.5V	-	0.002	-	%
Equivalent Input Noise Voltage	V_{NI}	$f=1kHz$	-	40	-	nV/ \sqrt{Hz}
Amp to Amp Separation	CS	$f=1kHz, V_O=1.8V_{pp}$ $R_L=10k\Omega$ to 1.5V	-	115	-	dB

●TRANSIENT CHARACTERISTICS

($V_{DD}=3V, T_a=25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	$R_L=10k\Omega$ to 1.5V	-	0.7	-	V/ μs

●DC CHARACTERISTICS

($V_{DD}=2.2V, T_a=25^{\circ}C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	I_{DD}	No Signal Apply	-	1.2	2	mA
Input Offset Voltage	V_{IO}		-	-	10	mV
Input Bias Current	I_B		-	1	-	pA
Input Offset Current	I_{IO}		-	1	-	pA
Large Signal Voltage Gain	A_V	$R_L=10k\Omega$ to 1.1V, $V_o=1.1V\pm 1.0V$	70	90	-	dB
Common Mode Rejection Ratio	CMR	CMR+: $1.1V \leq V_{CM} \leq 2.2V$ CMR-: $0V \leq V_{CM} \leq 1.1V$ (Note 9)	30	60	-	dB
Supply Voltage Rejection Ratio	SVR	$2.2V \leq V_{DD} \leq 2.7V,$ $V_{CM}=V_{DD}/2$	45	70	-	dB
Output Voltage1	V_{OH1}	$R_L=10k\Omega$ to 1.1V	2.15	-	-	V
	V_{OL1}	$R_L=10k\Omega$ to 1.1V	-	-	0.05	V
Output Voltage2	V_{OH2}	$R_L=600\Omega$ to 1.1V	2.1	-	-	V
	V_{OL2}	$R_L=600\Omega$ to 1.1V	-	-	0.1	V
Output Source Current	I_{SOURCE}	$V_o=1.1V$	10	15	-	mA
Output Sink Current	I_{SINK}	$V_o=1.1V$	10	15	-	mA
Input Common Mode Voltage Range	V_{ICM}	CMR $\geq 30dB$	0	-	2.2	V

(Note 9) CMR is represented by either CMR+ or CMR- has lower value.

●AC CHARACTERISTICS

($V_{DD}=2.2V, T_a=25^{\circ}C$)







PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Unity Gain Bandwidth	GB	$R_L=10k\Omega$ to 1.1V	-	0.8	-	MHz
Total Harmonic Distortion	THD	$f=1kHz, V_o=0.18V_{rms}, A_v=+1,$ $R_L=10k\Omega$ to 1.1V	-	0.004	-	%
Equivalent Input Noise Voltage	V_{NI}	$f=1kHz$	-	40	-	nV/ \sqrt{Hz}
Amp to Amp Separation	CS	$f=1kHz, V_o=1.2V_{pp}$ $R_L=2k\Omega$ to 1.1V	-	110	-	dB

●TRANSIENT CHARACTERISTICS

($V_{DD}=2.2V, T_a=25^{\circ}C$)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	$R_L=10k\Omega$ to 1.1V	-	0.6	-	V/ μs

•Typical Characteristics

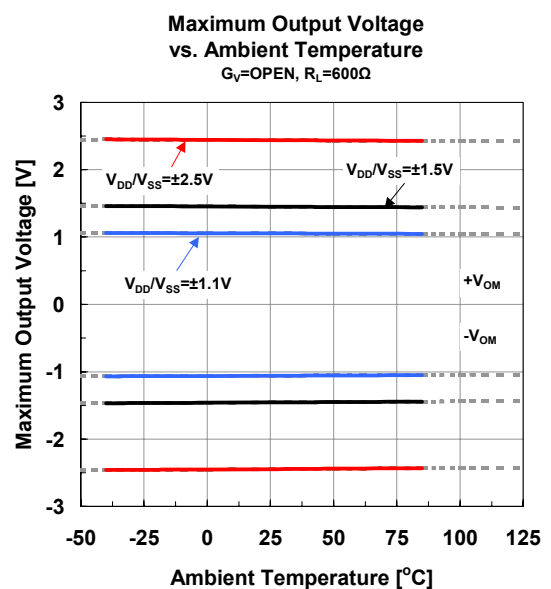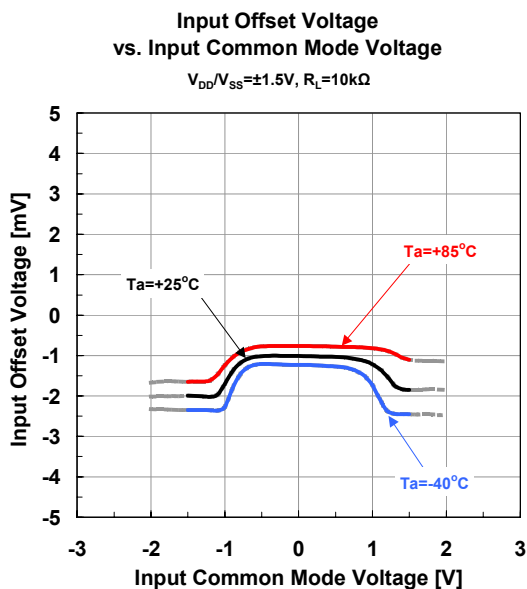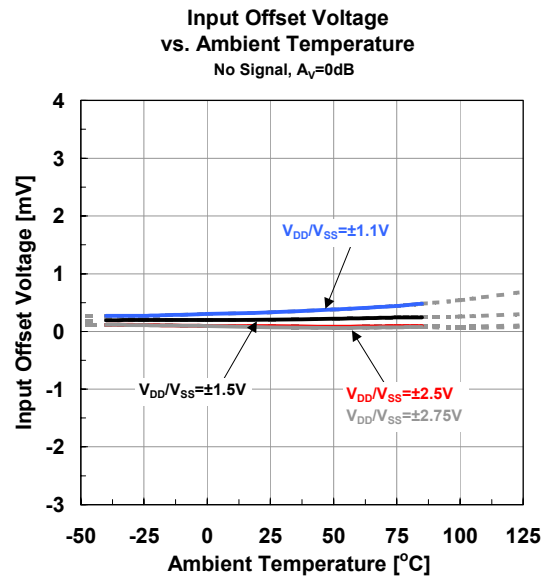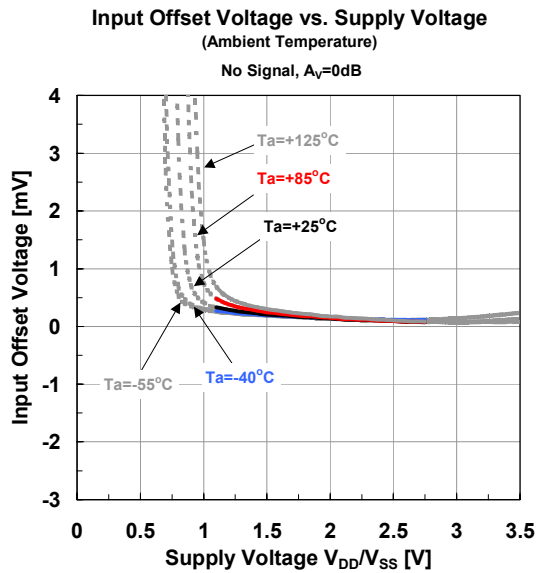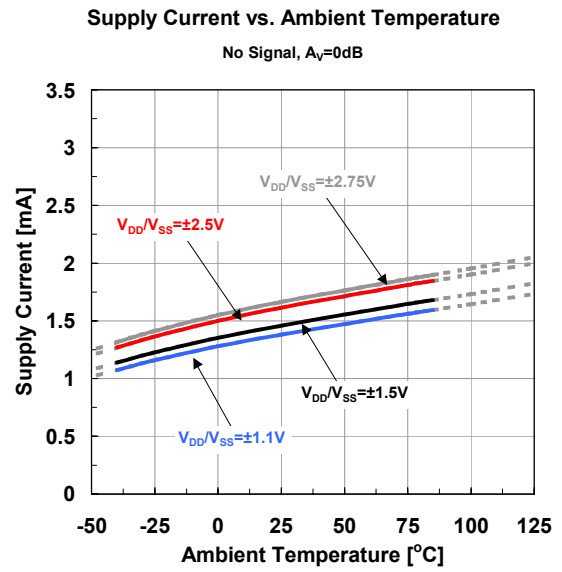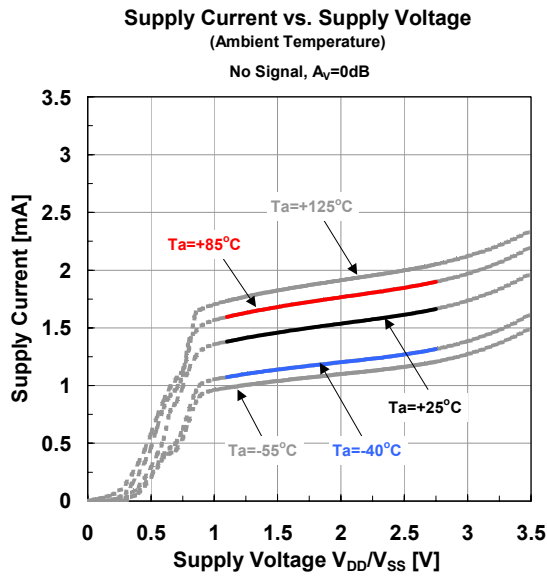


• Typical Characteristics


Maximum Output Voltage vs. Output Current
(Ambient Temperature)
 $V_{DD}/V_{SS} = \pm 1.5V$, $G_V = OPEN$

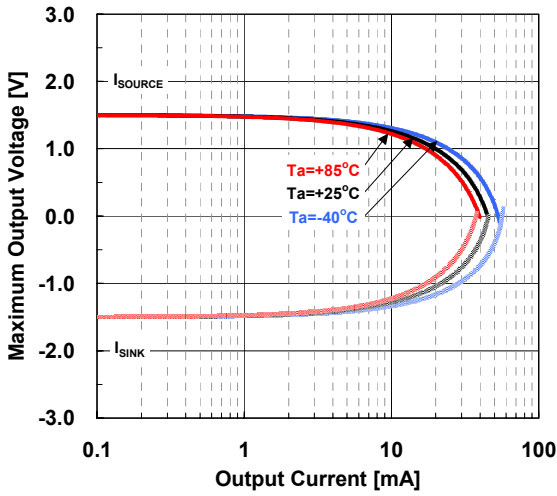


Maximum Output Voltage vs. Capacitive Load
(Ambient Temperature)
 $V_{DD}/V_{SS} = \pm 1.5V$, $G_V = OPEN$

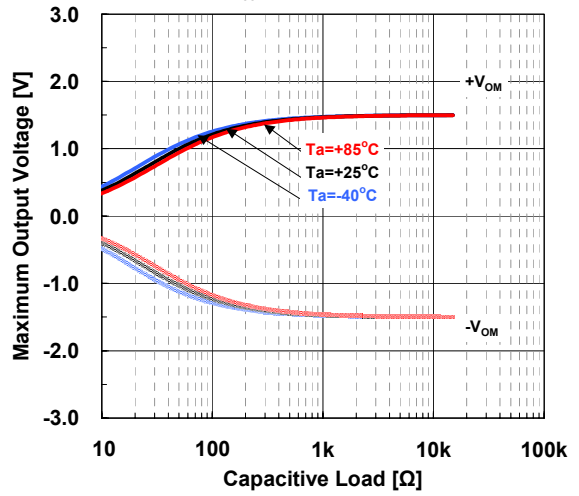

Maximum Output Voltage vs. Output Current
 $G_V = OPEN$, $T_a = +25^\circ C$

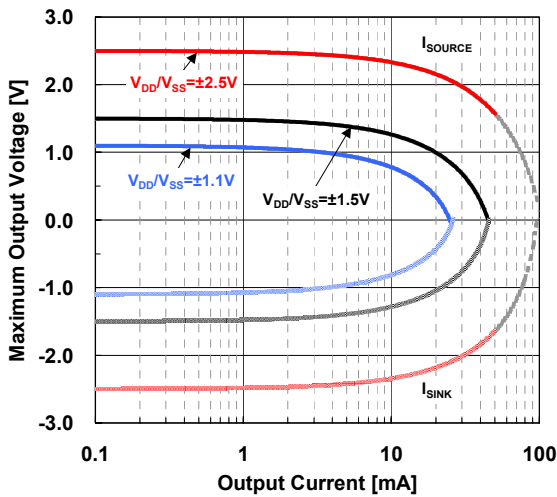


Maximum Output Voltage vs. Capacitive Load
(Supply Voltage)
 $G_V = OPEN$, $T_a = +25^\circ C$

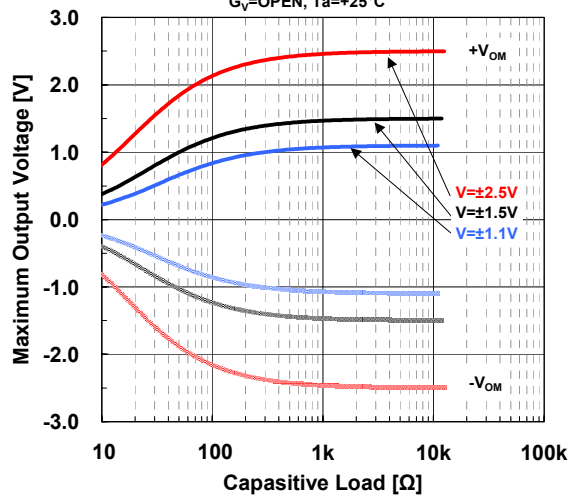


Common Mode Rejection Ratio vs. Ambient Temperature

CMR - : $GND \leq V_{CM} \leq V_{DD}/2$





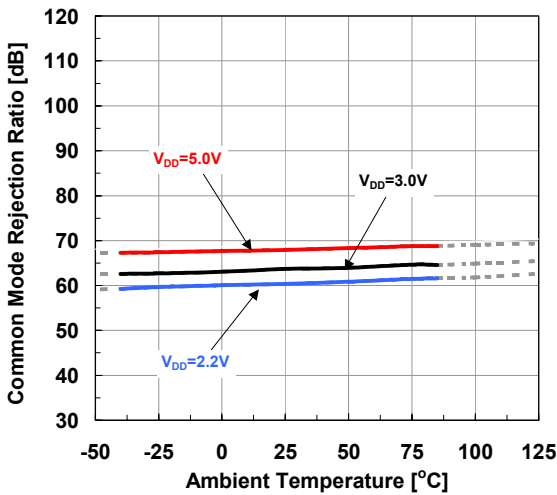


Supply Voltage Rejection Ratio vs. Ambient Temperature







No Signal, $A_v = 0dB$

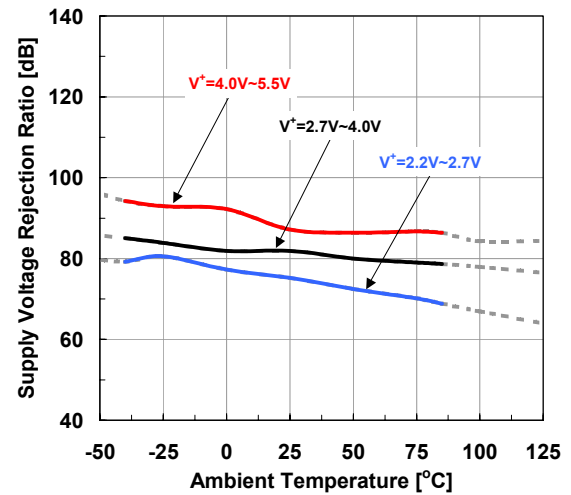





•Typical Characteristics

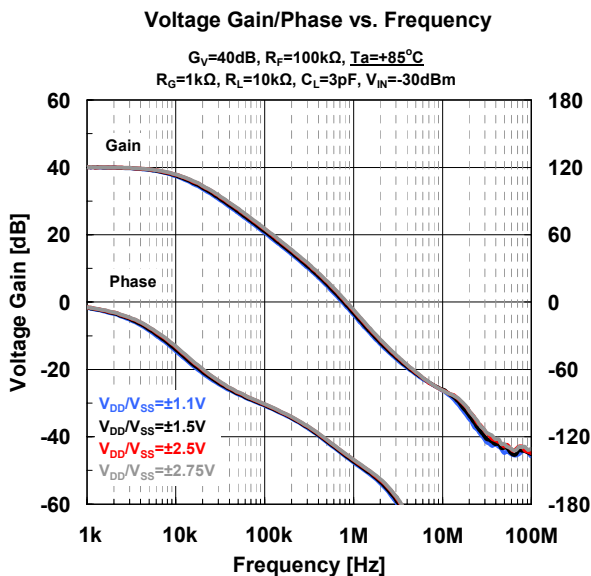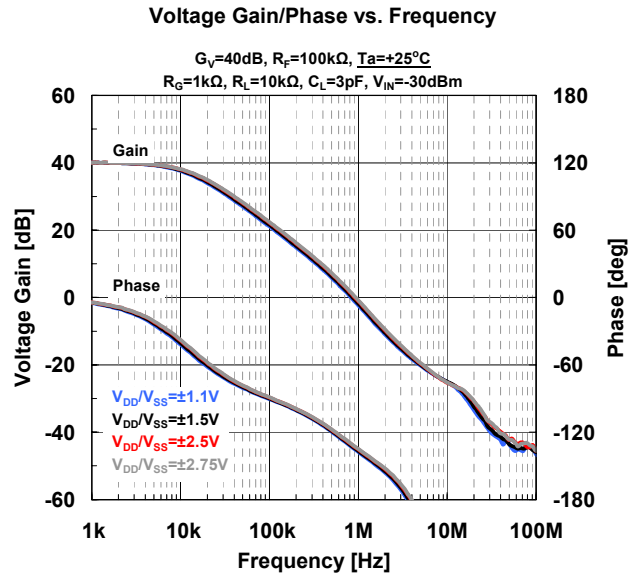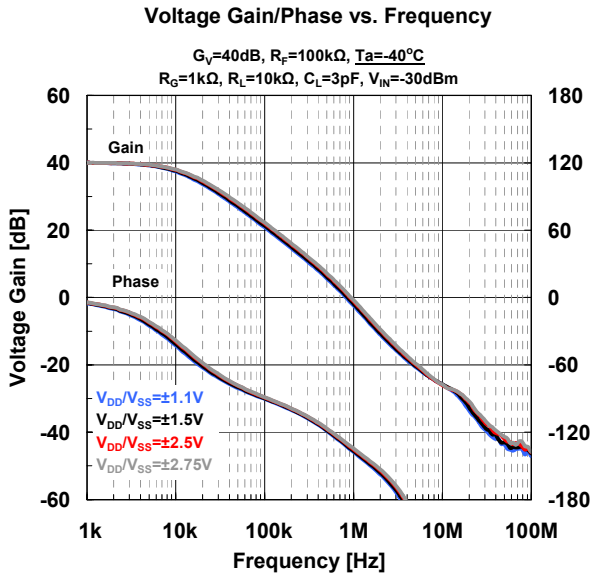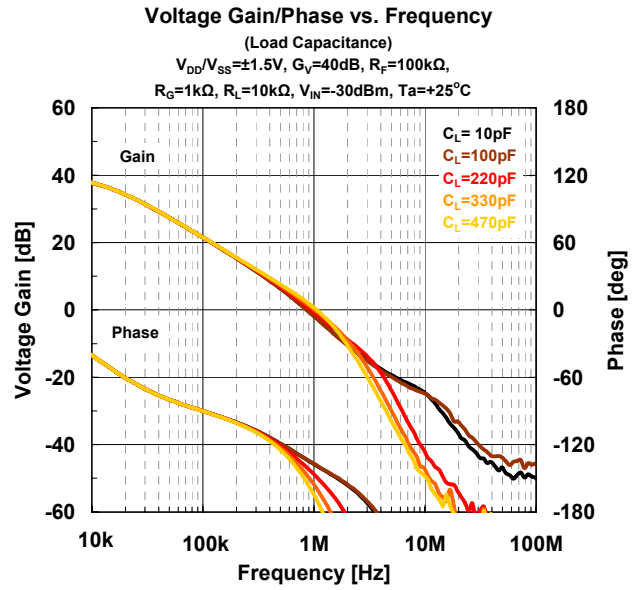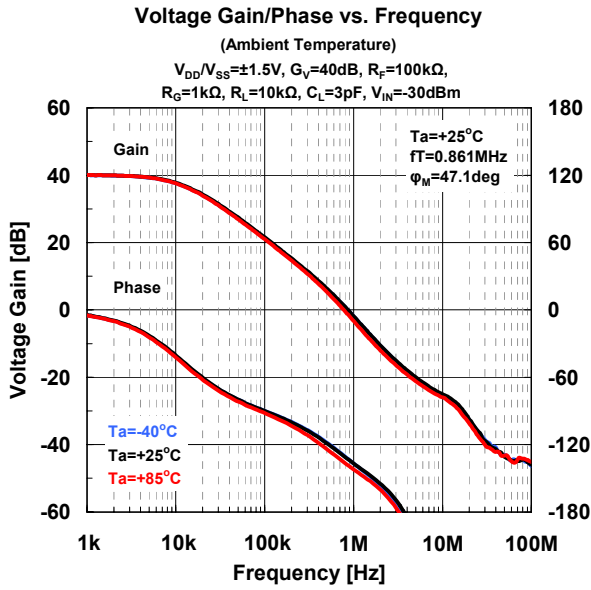

● Typical Characteristics

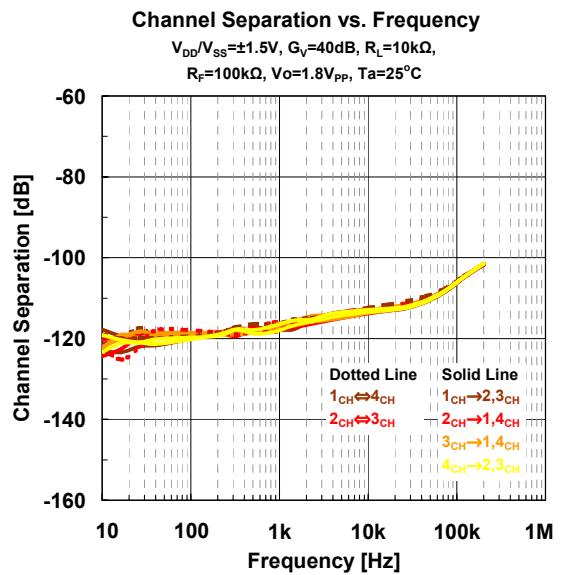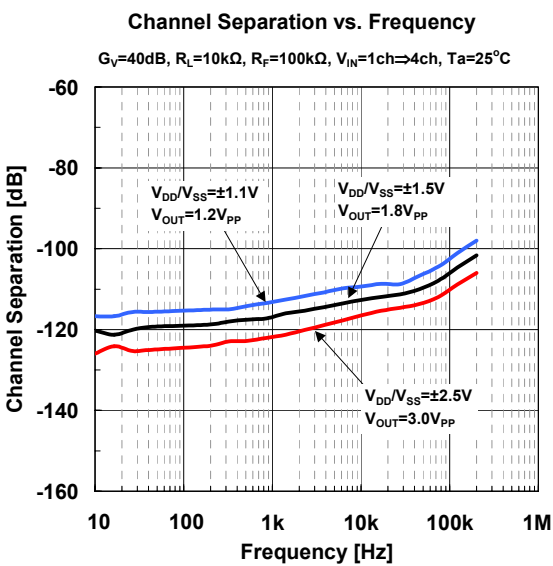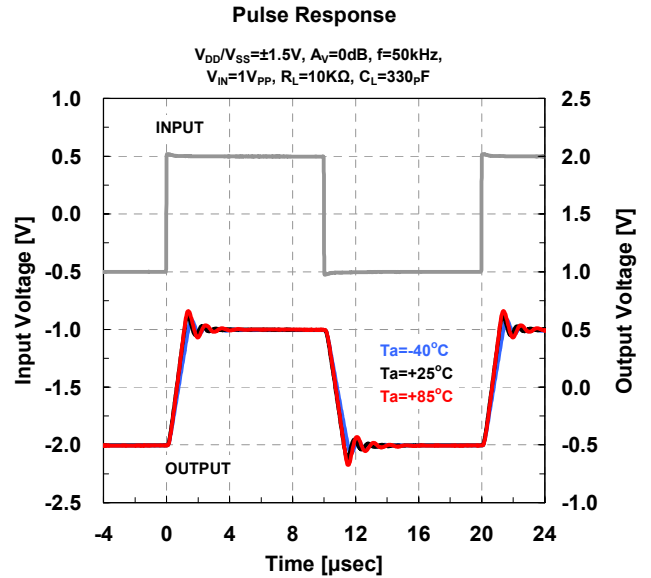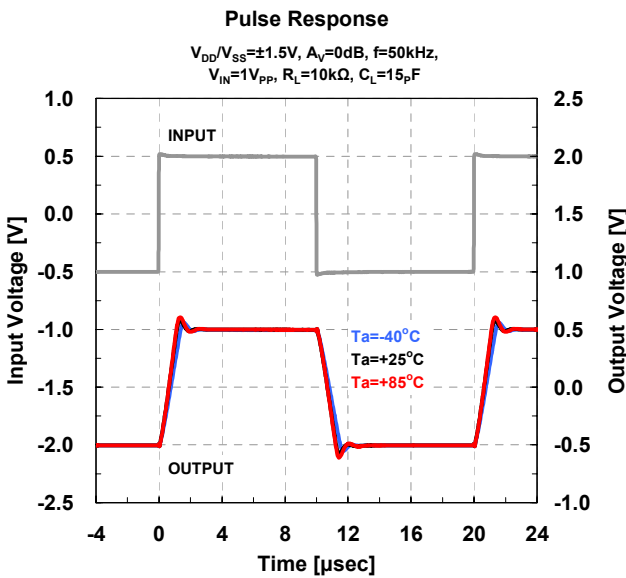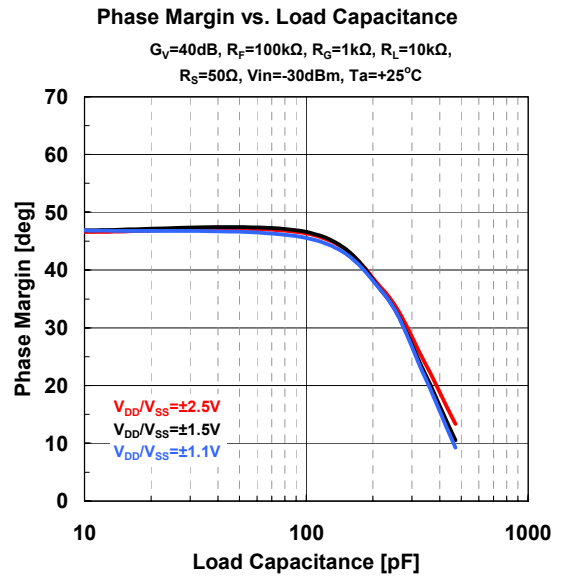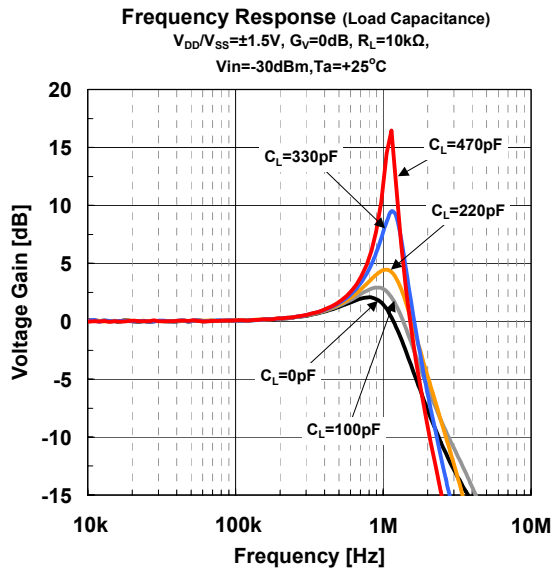

•Typical Characteristics

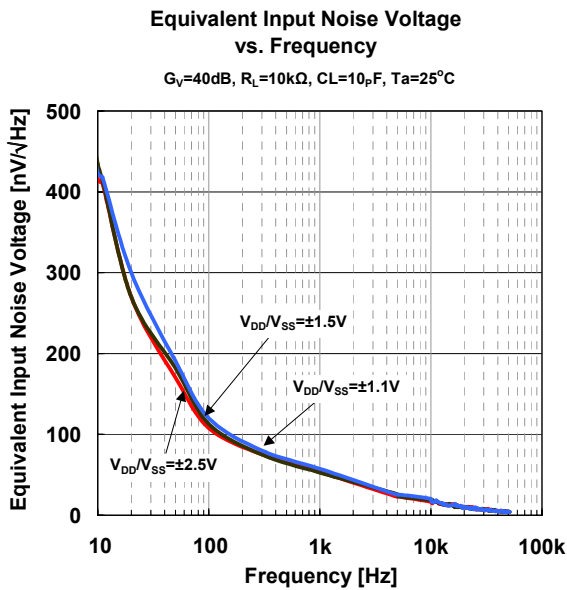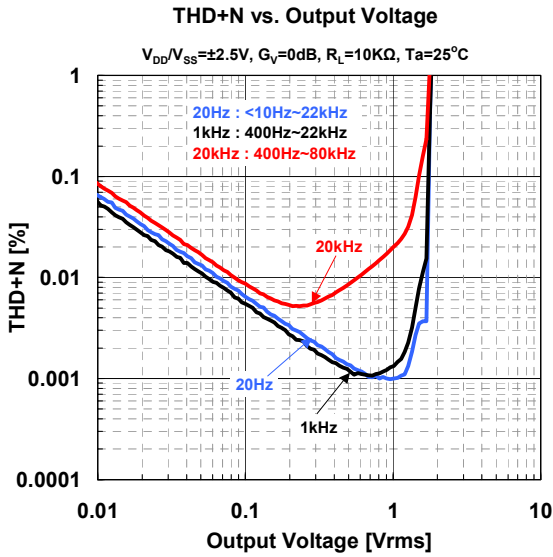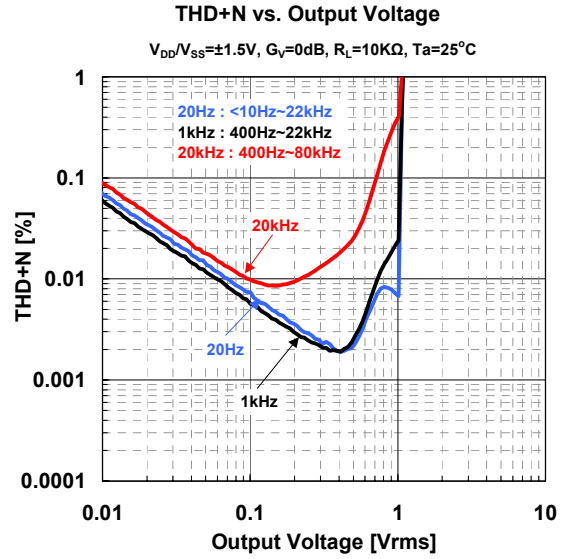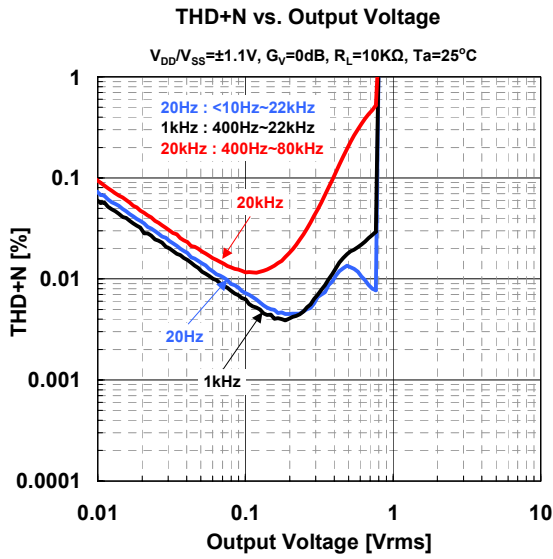

[CAUTION]
 The specifications on this data book are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this data book are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.