

# FGR3000FX-90DA

HIGH POWER INVERTER USE  
PRESS PACK TYPE


## FGR3000FX-90DA



- ITQRM Repetitive controllable on-state current ..... 3000A
- IT(AV) Average on-state current ..... 780A
- VDRM Repetitive peak off state voltage ..... 4500V
- Reverse conducting type

## OUTLINE DRAWING

Dimensions in mm

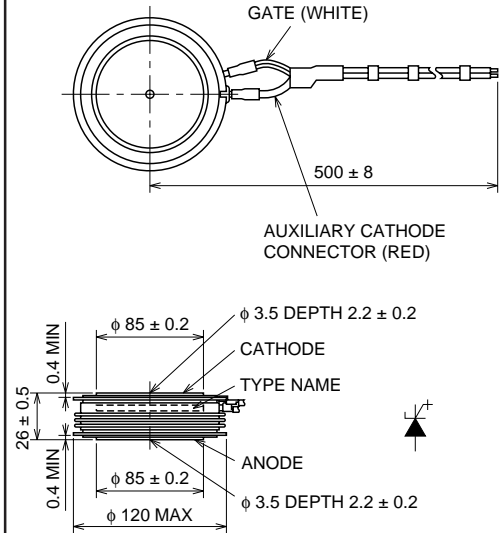

## APPLICATION

Inverters, D.C. choppers, Induction heaters, D.C. to D.C. converters.

## MAXIMUM RATINGS

| Symbol | Parameter                              | Voltage class |  | Unit |
|--------|--|---------------|--|------|
|        |  | 90DA          |  |      |
| VDRM   | Repetitive peak off-state voltage*     | 4500          |  | V    |
| VDSM   | Non-repetitive peak off-state voltage* | 4500          |  | V    |
| VD(DC) | DC off-state voltage*                  | 3600          |  | V    |
| VLTD5  | Long term DC stability voltage*        | 3000          |  | V    |

\* : VGK = -2V

| Symbol                       | Parameter                                 | Conditions  | Ratings               | Unit             |
|------------------------------|---|---|-----------------------|------------------|
| ITQRM                        | Repetitive controllable on-state current  | V <sub>DM</sub> = 4500V, T <sub>j</sub> = 125°C, C <sub>s</sub> = 6.0μF, L <sub>s</sub> = 0.2μH | 3000                  | A                |
| IT(RMS)                      | RMS on-state current                      |   | 1220                  | A                |
| IT(AV)                       | Average on-state current                  | f = 60Hz, sine wave θ = 180°, T <sub>r</sub> = 70°C   | 780                   | A                |
| ITSM                         | Surge (non-repetitive) on-state current   | One half cycle at 60Hz  | 16                    | kA               |
| IT <sup>2</sup> <sub>t</sub> | I <sup>2</sup> t for fusing               | One cycle at 60Hz   | 1.0 × 10 <sup>6</sup> | A <sup>2</sup> s |
| IR(RMS)                      | RMS Reverse current                       |   | 940                   | A                |
| IR(AV)                       | Average reverse current                   | f = 60Hz, sine wave θ = 180°C, T <sub>r</sub> = 75°C  | 600                   | A                |
| IRSM                         | Surge (non-repetitive) reverse current    | One half cycle at 60Hz  | 16                    | kA               |
| IR <sup>2</sup> <sub>t</sub> | Current-squared, time integration         | One cycle at 60Hz   | 1.0 × 10 <sup>6</sup> | A <sup>2</sup> s |
| diT/dt                       | Critical rate of rise of on-state current | V <sub>D</sub> = 3000V, I <sub>GM</sub> = 75A, T <sub>j</sub> = 75°C                            | 500                   | A/μs             |
| VFGM                         | Peak forward gate voltage                 |   | 10                    | V                |
| VRGM                         | Peak reverse gate voltage                 |   | 18                    | V                |
| IFGM                         | Peak forward gate current                 |   | 100                   | A                |
| IRGM                         | Peak gate reverse current                 |   | 900                   | A                |
| PFGM                         | Peak forward gate power dissipation       |   | 400                   | W                |
| PRGM                         | Peak reverse gate power dissipation       |   | 27                    | kW               |
| PFG(AV)                      | Average forward gate power dissipation    |   | 100                   | W                |
| PRG(AV)                      | Average reverse gate power dissipation    |   | 230                   | W                |
| T <sub>j</sub>               | Junction temperature                      |   | -40 ~ +125            | °C               |
| T <sub>stg</sub>             | Storage temperature                       |   | -40 ~ +150            | °C               |
| —                            | Mounting force required                   | Recommended value 37  | 31 ~ 43               | kN               |
| —                            | Weight                                    | Standard value  | 1450                  | g                |

# FGR3000FX-90DA


HIGH POWER INVERTER USE  
PRESS PACK TYPE

## ELECTRICAL CHARACTERISTICS


| Symbol               | Parameter                                  | Test conditions  | Limits |     |       | Unit |
|----------------------|--|--|--------|-----|-------|------|
|                      |  |  | Min    | Typ | Max   |      |
| V <sub>TM</sub>      | On-state voltage                           | T <sub>j</sub> = 125°C, I <sub>TM</sub> = 3000A, Instantaneous measurement   | —      | —   | 5.0   | V    |
| V <sub>RM</sub>      | Peak reverse voltage drop                  | T <sub>j</sub> = 125°C, I <sub>RM</sub> = 3000A, Instantaneous measurement   | —      | —   | 4.5   | V    |
| I <sub>DRM</sub>     | Repetitive peak off-state current          | T <sub>j</sub> = 125°C, V <sub>DRM</sub> Applied, V <sub>GK</sub> = -2V  | —      | —   | 250   | mA   |
| I <sub>RG</sub>      | Reverse gate current                       | T <sub>j</sub> = 125°C, V <sub>RG</sub> = 17V  | —      | —   | 500   | mA   |
| dv/dt                | Critical rate of rise of off-state voltage | T <sub>j</sub> = 125°C, V <sub>D</sub> = 3000V, V <sub>GK</sub> = -2V  | 1000   | —   | —     | V/μs |
| t <sub>gt</sub>      | Turn-on time                               | T <sub>j</sub> = 125°C, I <sub>TM</sub> = 3000A, I <sub>GM</sub> = 75A, V <sub>D</sub> = 3000V   | —      | —   | 10    | μs   |
| t <sub>gq</sub>      | Turn-off time                              | T <sub>j</sub> = 125°C, I <sub>TM</sub> = 3000A, V <sub>DM</sub> = 4500V, diGQ/dt = -30A/μs<br>V <sub>RG</sub> = 17V, C <sub>s</sub> = 6.0μF, L <sub>s</sub> = 0.2μH | —      | —   | 30    | μs   |
| I <sub>GQM</sub>     | Peak gate turn-off current                 |  | —      | 720 | —     | A    |
| V <sub>GT</sub>      | Gate trigger voltage                       | DC METHOD : V <sub>D</sub> = 24V, R <sub>L</sub> = 0.1Ω, T <sub>j</sub> = 25°C   | —      | —   | 1.5   | V    |
| I <sub>GT</sub>      | Gate trigger current                       |  | —      | —   | 3000  | mA   |
| R <sub>th(j-f)</sub> | Thermal resistance                         | GTO Side (Junction to fin)   | —      | —   | 0.016 | °C/W |
|                      |  | Diode Side (Junction to fin)   | —      | —   | 0.025 |      |

## PERFORMANCE CURVES


MAXIMUM ON-STATE AND MAXIMUM REVERSE CHARACTERISTICS

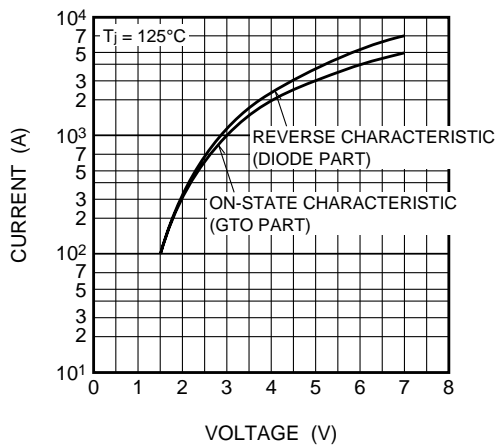


RATED ON-STATE AND REVERSE SURGE CURRENT

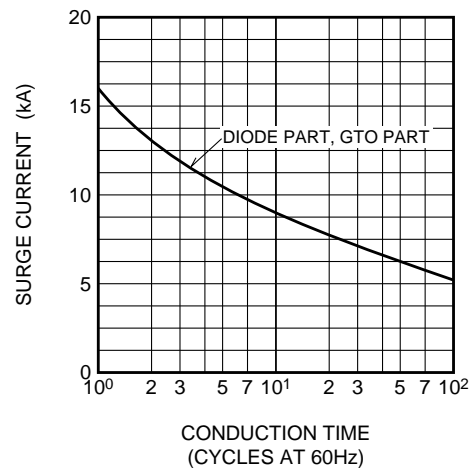

GATE CHARACTERISTICS

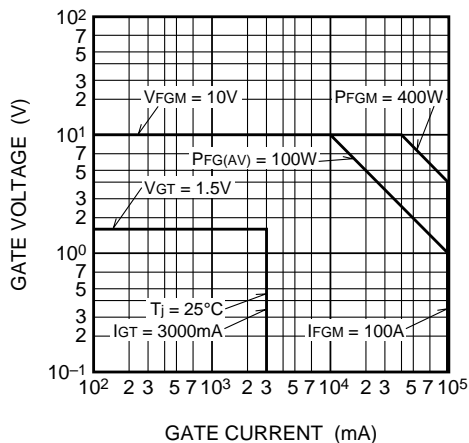


MAXIMUM THERMAL IMPEDANCE CHARACTERISTICS (JUNCTION TO FIN)

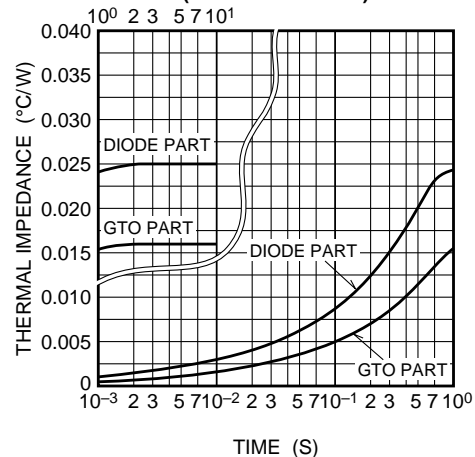


# FGR3000FX-90DA

HIGH POWER INVERTER USE  
PRESS PACK TYPE


**MAXIMUM ON-STATE POWER DISSIPATION CHARACTERISTICS (GTO PART, SINGLE-PHASE HALF WAVE)**

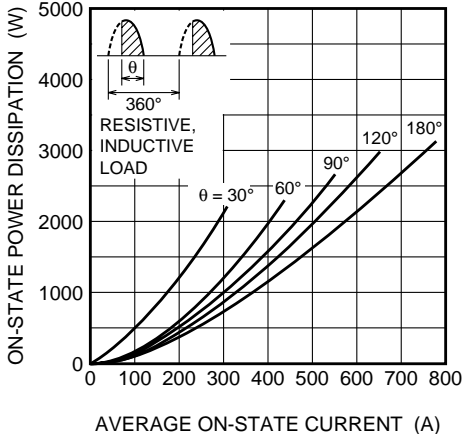


**ALLOWABLE FIN TEMPERATURE VS. AVERAGE ON-STATE CURRENT (GTO PART, SINGLE-PHASE HALF WAVE)**

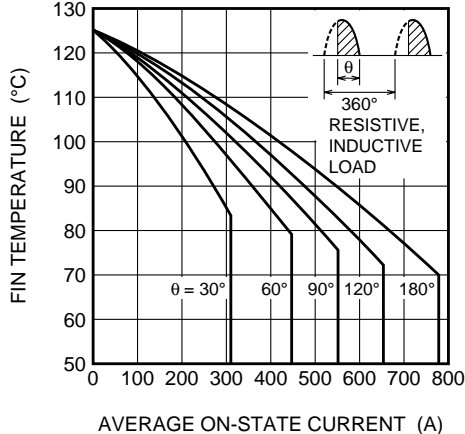


**MAXIMUM ON-STATE POWER DISSIPATION CHARACTERISTICS (GTO PART, RECTANGULAR WAVE)**

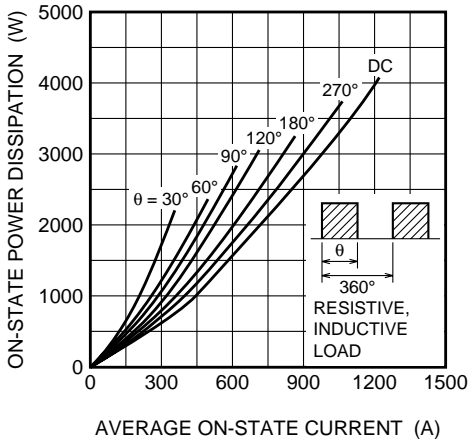


**ALLOWABLE FIN TEMPERATURE VS. AVERAGE ON-STATE CURRENT (GTO PART, RECTANGULAR WAVE)**

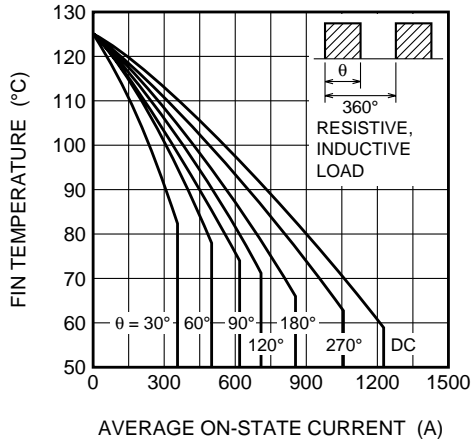

**MAXIMUM REVERSE POWER DISSIPATION CHARACTERISTICS (DIODE PART, SINGLE PHASE WAVE)**

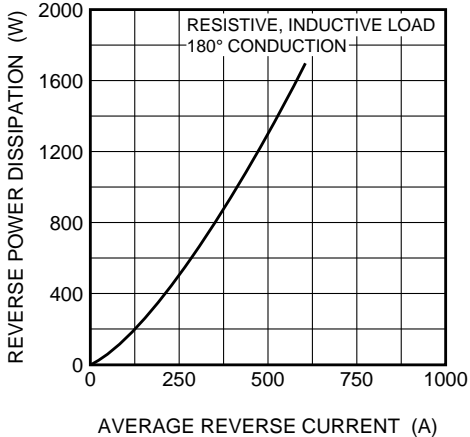


**ALLOWABLE FIN TEMPERATURE VS. AVERAGE REVERSE CURRENT (DIODE PART, SINGLE PHASE HALF WAVE)**

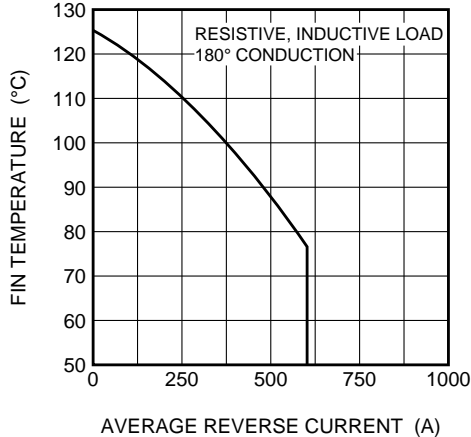


# FGR3000FX-90DA

HIGH POWER INVERTER USE  
PRESS PACK TYPE


**GATE TRIGGER CURRENT VS. JUNCTION TEMPERATURE (TYPICAL)**

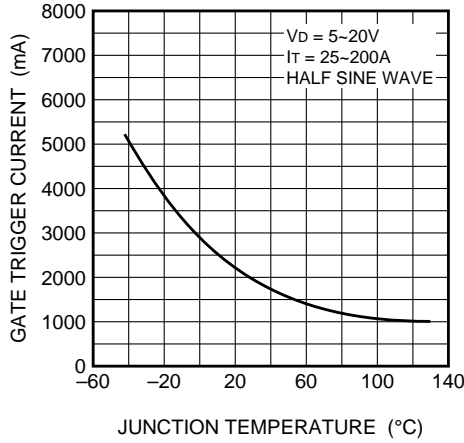


**TURN ON TIME, TURN ON DELAY TIME VS. TURN ON GATE CURRENT (TYPICAL)**

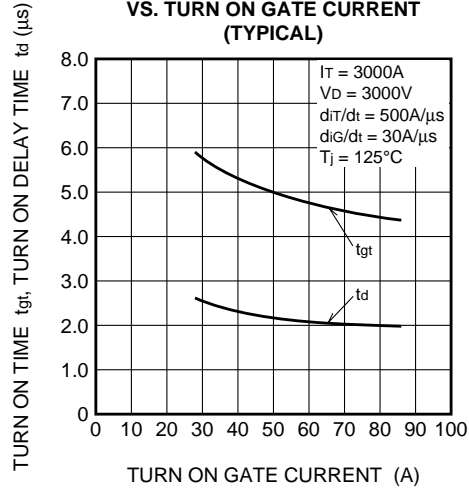


**TURN OFF TIME, TURN OFF STORAGE TIME VS. TURN OFF GATE CURRENT (TYPICAL)**

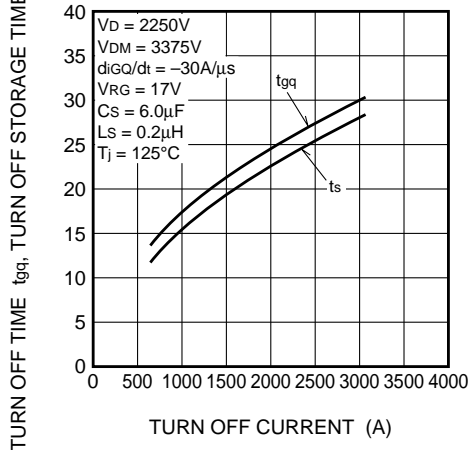


**TURN OFF TIME, TURN OFF STORAGE TIME VS. RATE OF RISE OF TURN OFF GATE CURRENT (TYPICAL)**

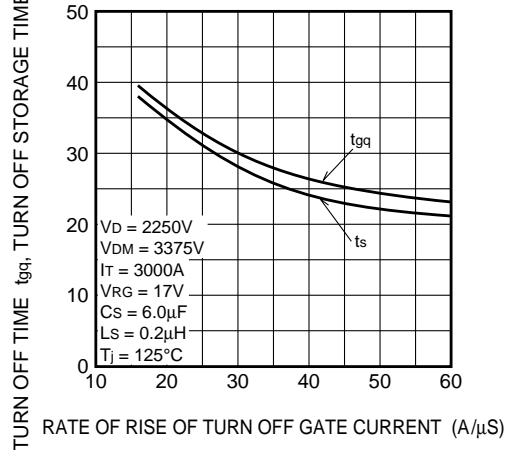

**TURN OFF GATE CURRENT VS. TURN OFF CURRENT (TYPICAL)**

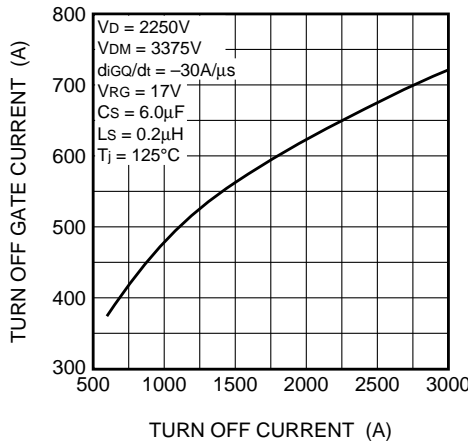


**TURN OFF GATE CURRENT VS. RATE OF RISE OF GATE CURRENT (TYPICAL)**

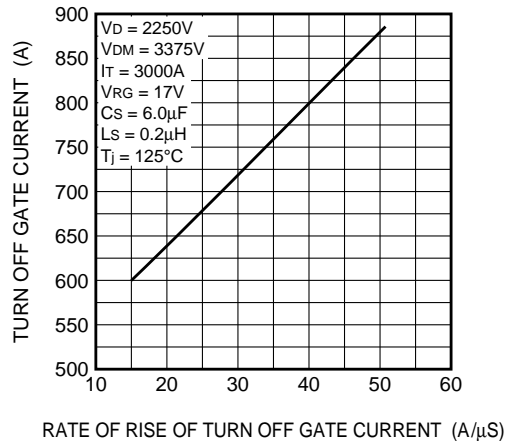


# FGR3000FX-90DA

HIGH POWER INVERTER USE  
PRESS PACK TYPE


**TURN ON SWITCHING ENERGY (MAXIMUM)**

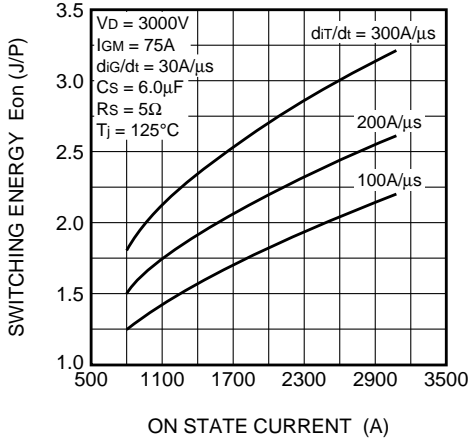


**TURN OFF SWITCHING ENERGY (MAXIMUM)**

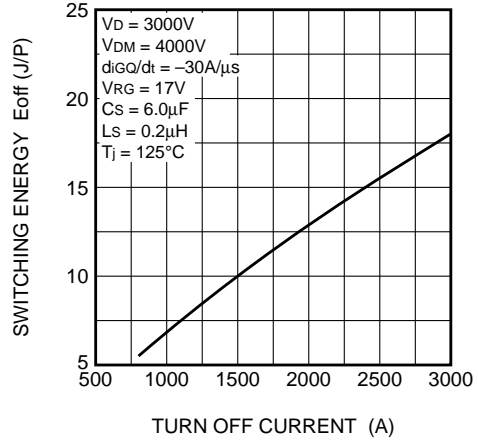


**OFF STATE RECOVERY CHARGE, OFF STATE RECOVERY TIME VS. JUNCTION TEMPERATURE**

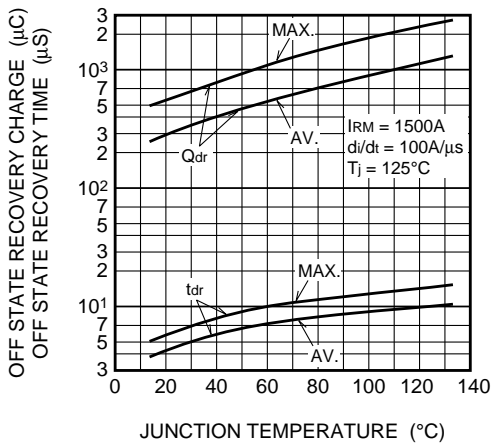

**OFF STATE RECOVERY CHARGE, OFF STATE RECOVERY TIME VS. REVERSE CURRENT**

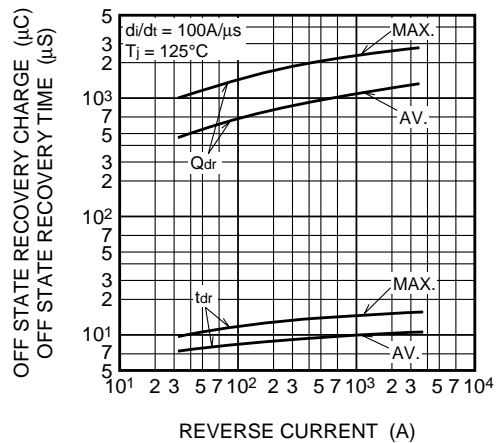

**OFF STATE RECOVERY CHARGE, OFF STATE RECOVERY TIME VS. RATE OF DECREASE OF REVERSE CURRENT**

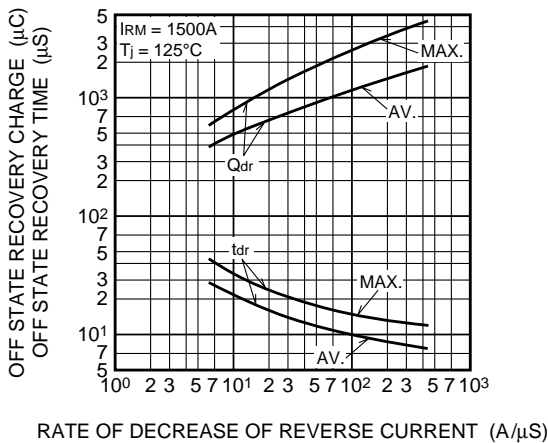

**OFF STATE RECOVERY LOSS(DIODE PART) VS. REVERSE CURRENT (TYPICAL)**

