

# HIGH POWER TWIN RELAY

## 1 POLE x 2—30A

### (FOR AUTOMOTIVE APPLICATIONS)

# FBR562 SERIES

#### ■ FEATURES

- Two independent relays mounted in a single package (43% of the volume of the two FRL-270 relays)
- High current contact capacity (carrying current: 40 A/2 minutes, 30 A/1 hour)
- High heat resistance and extended operating voltage



#### ■ ORDERING INFORMATION

[Example]    FBR562    N    D12    -    W1    \*\*  
                   (a)    (b)    (c)    (d)    (e)

(a)	Series Name	FBR562: FBR562 Series relay for 12 V battery (contact gap 0.4 mm)
(b)	Enclosure	N : Plastic sealed type
(c)	Nominal Voltage	D06 : 6 VDC D09 : 9 VDC D12 : 12 VDC
(d)	Contact Material	W1 : Silver-tin oxide indium
(e)	Custom Designation	To be assigned custom specification

# FBR562 SERIES

## ■ SPECIFICATIONS

Item		Specifications	
Contact	Arrangement	1 form C × 2 (SPDT × 2)	
	Material	Silver-tin oxide indium (–W1 type)	
	Voltage Drop (resistance)	Maximum 100 mV (at 2 A 12 VDC)	
	Ratings	14 VDC 20 A (locked motor load) 14 VDC inrush 20 A, break 4 A (motor free load)	
	Maximum Carrying Current	40 A/2 minutes, 30 A/ 1 hour (25°C, 100% rated coil voltage)	
	Maximum Inrush Current (reference)	–W1 type: 60 A	
	Max. Switching Current (reference)	40 A 16 VDC	
	Minimum Switching Load*1 (reference)	–W1 type: 6 VDC 1 A	
Coil	Operating Temperature	–40°C to +85°C (no frost) (refer to the CHARACTERISTIC DATA)	
	Storage Temperature	–40°C to +100°C (no frost)	
Time Value	Operate (at nominal voltage)	Maximum 10 ms	
	Release (at nominal voltage)	Maximum 5 ms	
Life	Mechanical	1 × 10 <sup>7</sup> operations minimum	
	Electrical	1 × 10 <sup>5</sup> operations minimum (locked motor load) 1 × 10 <sup>6</sup> operations minimum (motor free Load)	
Other	Vibration Resistance	10 to 55 Hz (double amplitude of 1.5 mm)	
	Shock Resistance	Misoperation	100 m/s <sup>2</sup>
		Endurance	1,000 m/s <sup>2</sup>
	Weight	Approximately 18 g	

\*1 Values when switching a resistive load at normal room temperature and humidity and in a clean environment. The minimum switching load varies with the switching frequency and operating environment.

## ■ COIL DATA CHART

MODEL	Nominal voltage	Coil resistance (±10%) (at 20°C)	Must operate voltage	Thermal resistance
W1 contact				
FBR562ND06-W1	6 VDC	42 Ω	3.6 VDC (at 20°C) 4.5 VDC (at 85°C)	77°C/W
FBR562ND09-W1	9 VDC	95 Ω	5.4 VDC (at 20°C) 6.8 VDC (at 85°C)	
FBR562ND12-W1	12 VDC	170 Ω	7.3 VDC (at 20°C) 9.2 VDC (at 85°C)	


# FBR562 SERIES

## ■ SUITABLE APPLICATIONS


Application		Normal load current	Life x 10 <sup>3</sup>	Recommended model (example)
For 12 V battery	Power Windows	20 to 30 A (switching at motor locking)	100	FBR562N□ -W1
	Automatic Door Lock	18 to 30 A/4 to 5 door (switching at motor locking)	100	FBR562N□ -W1
	Intermittent Wipers	INRUSH 15 to 30 A BREAK 2 to 8 A (motor free)	300	FBR562N□ -W1
	Tilt-Lock Wheel	INRUSH 15 A BREAK 2.5 A (motor free)	100	FBR562N□ -W1
	Sunroof	20 to 30 A (switching at motor locking)	100	FBR562N□ -W1
	Others	Car audio system, etc	—	FBR562N□ -W1

## ■ CHARACTERISTIC DATA

### 1. MAXIMUM BREAK CAPACITY

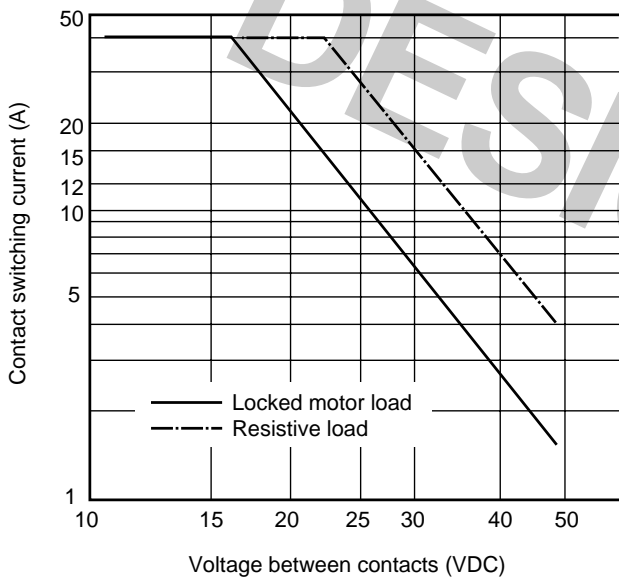


### 2. LIFE

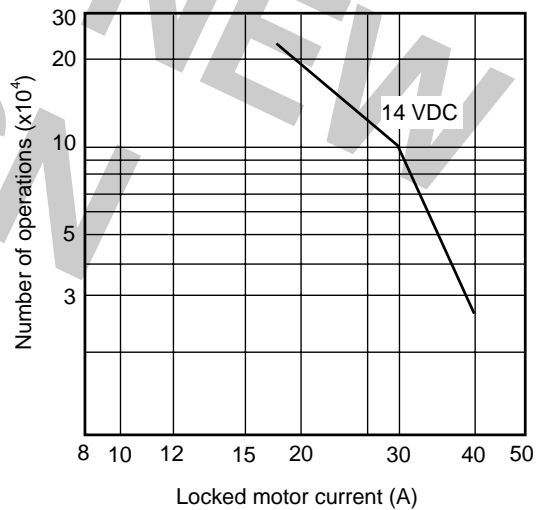


## 3. LIFE TEST (EXAMPLE)

¥ Test item  
 14 VDC-20 A  
 Motor lock  
 200,000 operations minimum  
 (FBR562 □-W1 type)


¥ Test circuit




¥ Current Wave Form



¥ Shift of pick-up drop-out voltage

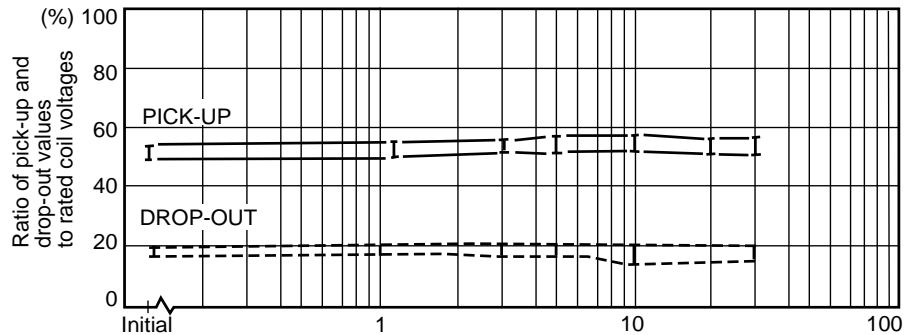


¥ Shift of contact resistance

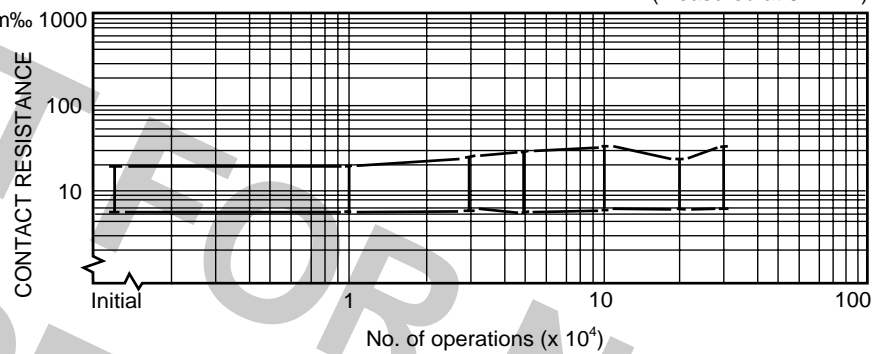


¥ Test item  
 14 VDC-30 A  
 Motor lock  
 100,000 operations minimum  
 (FBR562 □-W1 type)


¥ Test circuit




¥ Current wave form



¥ Shift of pick-up drop-out voltage

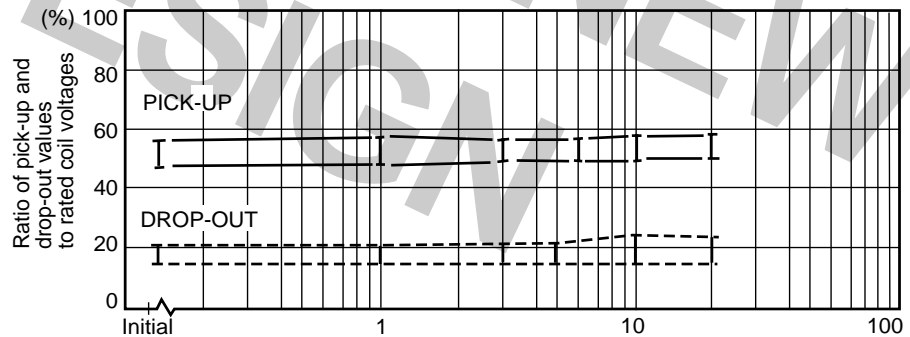

¥ Shift of contact resistance

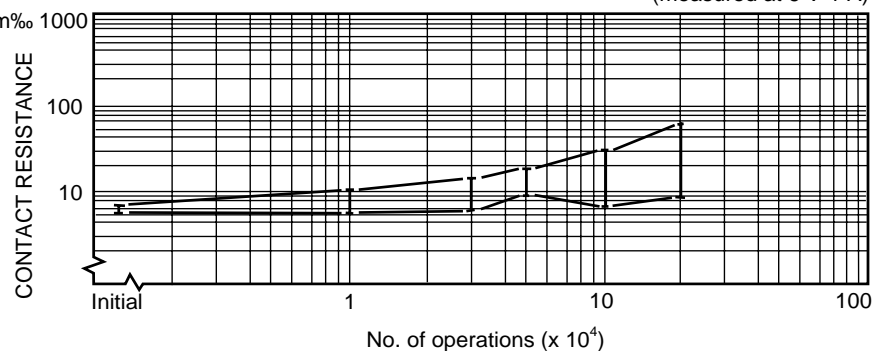


(Continued)


(Continued)

- Test item  
16 VDC-25 A INRUSH  
Motor Free  
400,000 operations minimum  
(FBR562 □-W1 type)


● Test circuit




● Current wave form




● Shift of pick-up drop-out voltage

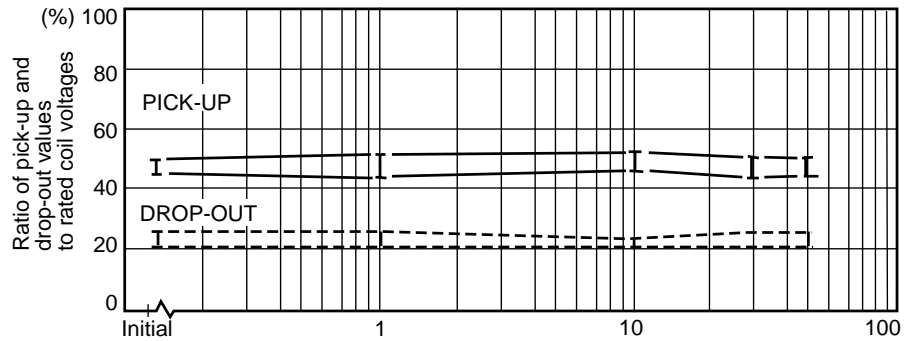

● Shift of contact resistance

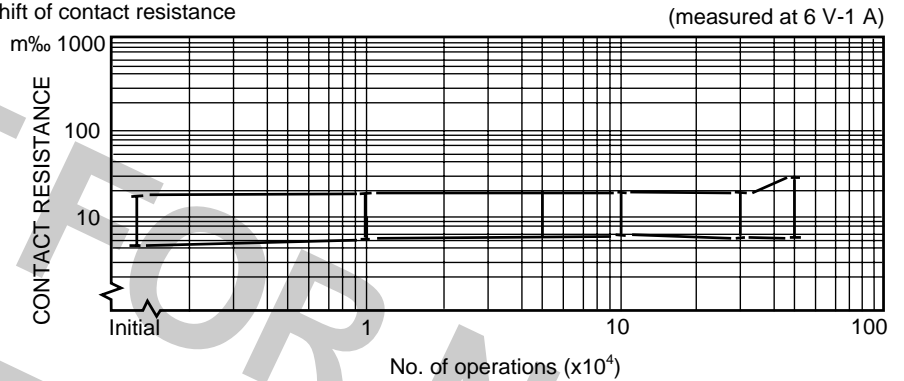


## 4. COIL TEMPERATURE RISE

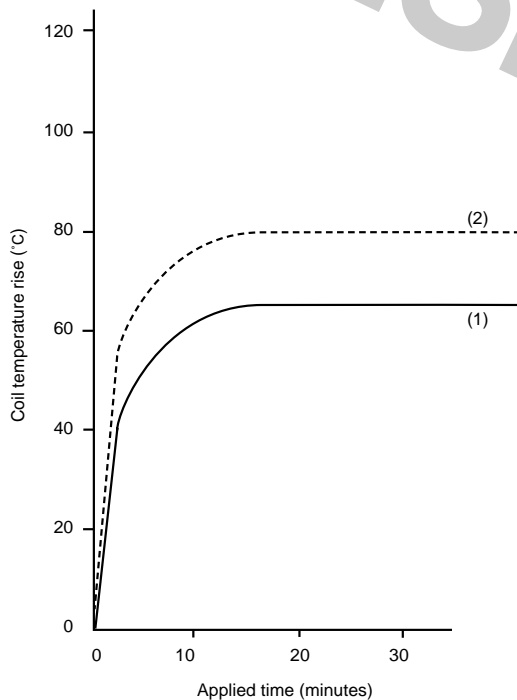


\*: One coil energized at 20°C

If both coils are energized, temperature rise will increase by  
 (1) 5°C (0 A carrying current)  
 (2) 20°C (10 A carrying current)

## 5. OPERATING COIL VOLTAGE RANGE (EXAMPLE)

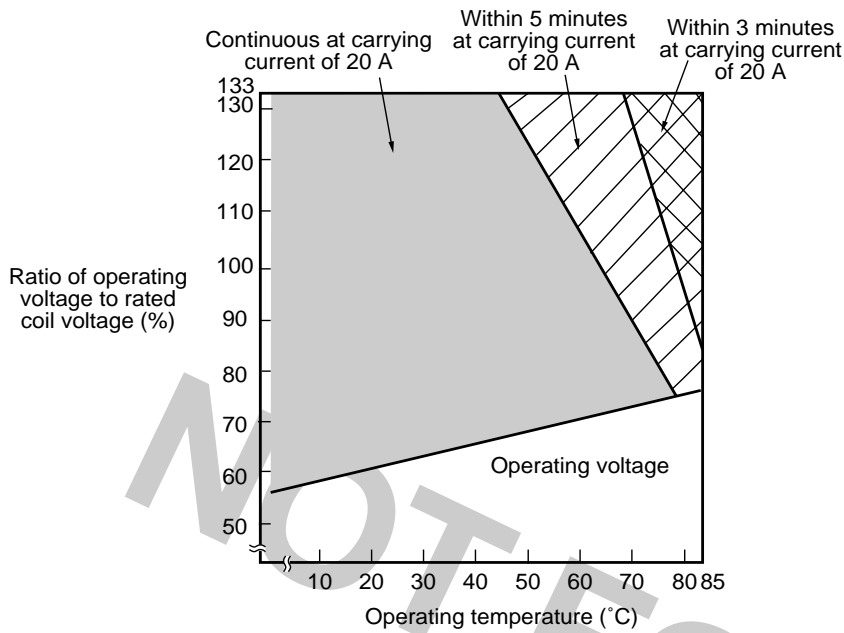


## 6. VIBRATION RESISTANCE CHARACTERISTICS



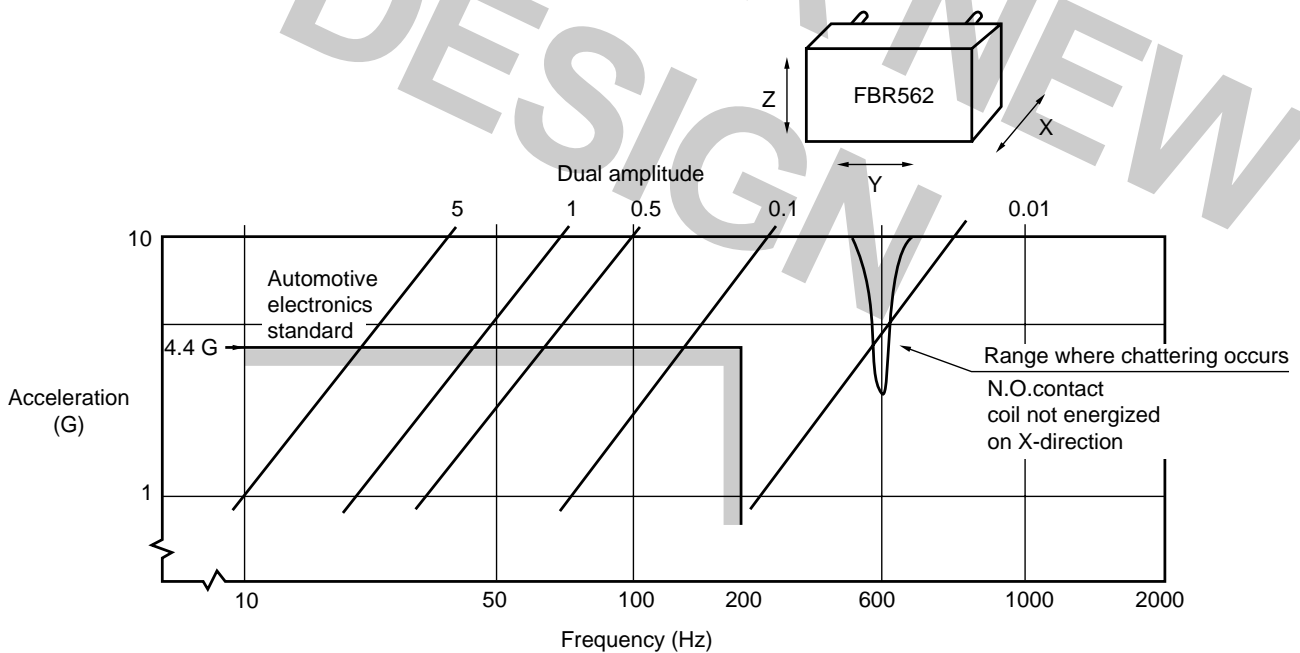


# FBR562 SERIES

## 7. SHOCK RESISTANCE CHARACTERISTICS

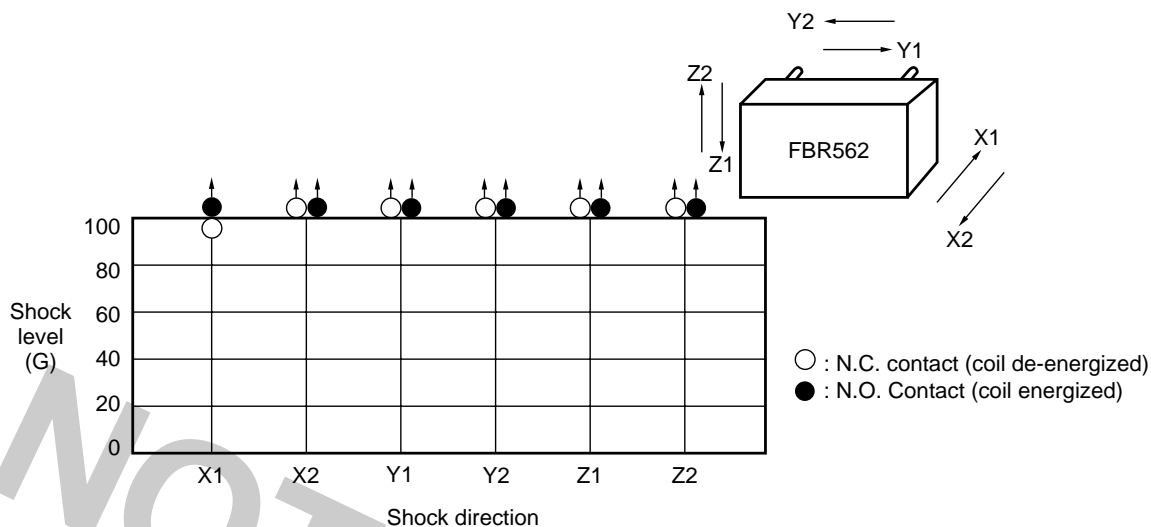


## REFERENCE DATA

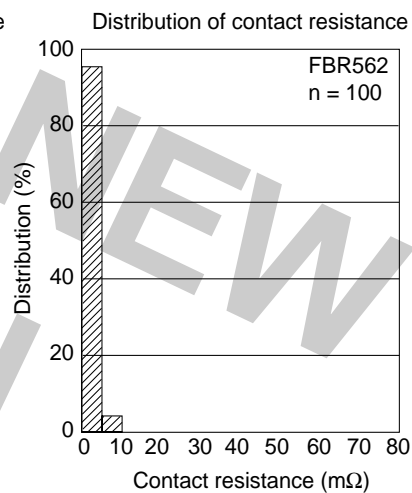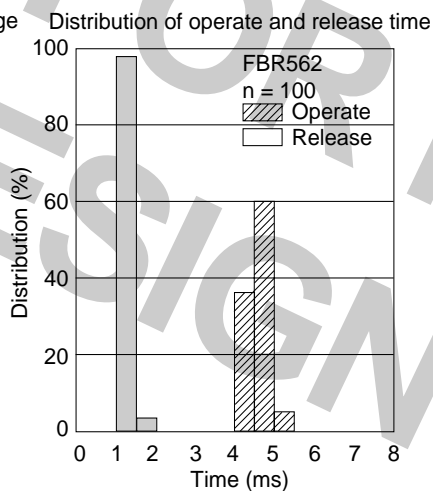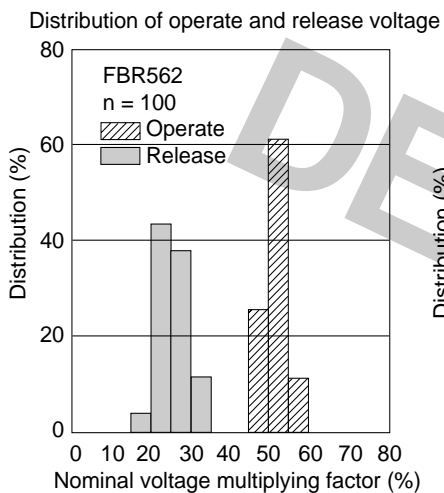


# FBR562 SERIES

## ■ DIMENSIONS


### ● Dimensions

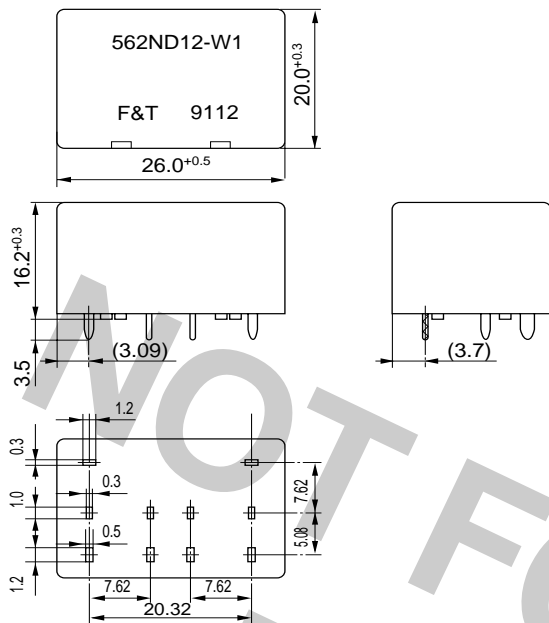


### ● PC board mounting hole layout (BOTTOM VIEW)

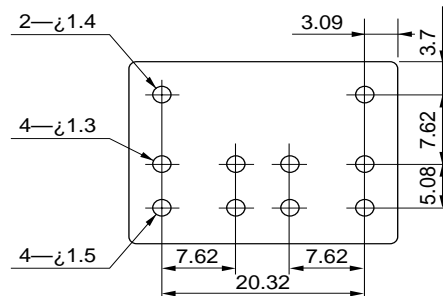

### ● Schematic (BOTTOM VIEW)



### ● Tube carrier

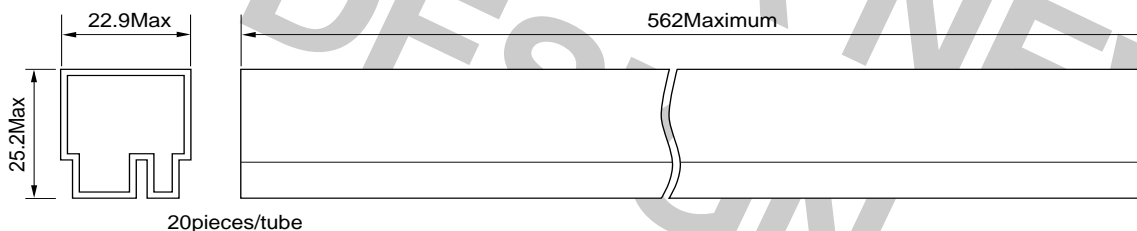

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [marcom@fcai.fujitsu.com](mailto:marcom@fcai.fujitsu.com)  
Web: [www.fcai.fujitsu.com](http://www.fcai.fujitsu.com)

### Europe

Fujitsu Components Europe B.V. Unit: mm  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: [www.fceu.fujitsu.com](http://www.fceu.fujitsu.com)

### Asia Pacific

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#04-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcal@fcal.fujitsu.com](mailto:fcal@fcal.fujitsu.com)  
[www.fcal.fujitsu.com](http://www.fcal.fujitsu.com)