


Current Transducer LB 1000-SI/SP2

$$I_{PN} = 1000 \text{ A}$$

For the electronic measurement of currents : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



Electrical data

| | | | |
|----------|---|-------------------------------|---------------|
| I_{PN} | Primary nominal r.m.s. current | 1000 | A |
| I_p | Primary current, measuring range | 0 .. ± 1500 | A |
| R_M | Measuring resistance with $\pm 15 \text{ V}$ | $R_{M \min}$ | $R_{M \max}$ |
| | | @ $\pm 1000 \text{ A}_{\max}$ | 0 25 Ω |
| | | @ $\pm 1500 \text{ A}_{\max}$ | 0 5 Ω |
| I_{SN} | Secondary nominal r.m.s. current | 200 | m A |
| K_N | Conversion ratio | 1 : 5000 | |
| V_C | Supply voltage ($\pm 5 \%$) | ± 15 | VDC |
| I_C | Current consumption | $21 + I_s$ | m A |

Features

- Closed loop (compensated) current transducer using the Hall effect
- Insulated plastic case recognized according to UL 94-V0.

Special features

- $T_A = +10^\circ\text{C} \dots +50^\circ\text{C}$
- Shield between primary and secondary.

Accuracy - Dynamic performance data

| | | | |
|----------|---|-----------|------------------|
| X_G | Overall accuracy @ $I_{PN}, T_A = 25^\circ\text{C}$ | ± 0.3 | % |
| e_L | Linearity error | < 0.1 | % |
| I_O | Offset current @ $I_p = 0, T_A = 25^\circ\text{C}$ | Typ | Max |
| | | | ± 0.4 m A |
| I_{OT} | Thermal drift of I_O + $10^\circ\text{C} \dots +50^\circ\text{C}$ | ± 0.1 | ± 0.2 m A |
| t_r | Response time ¹⁾ @ 90 % of I_{PN} | < 1 | μs |
| di/dt | di/dt accurately followed | > 50 | A/ μs |
| f | Frequency bandwidth (-1 dB) | DC .. 100 | kHz |

Advantages

- Better zero crossing performance
- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

General data

| | | | |
|-------|--|-----------------|------------------|
| T_A | Ambient operating temperature | + 10 .. + 50 | $^\circ\text{C}$ |
| T_S | Ambient storage temperature | - 25 .. + 85 | $^\circ\text{C}$ |
| R_S | Secondary coil resistance @ $T_A = 70^\circ\text{C}$ | 40 | Ω |
| m | Mass | 700 | g |
| | Standards | EN 50178 : 1997 | |

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Application domain

- Industrial.

Note :¹⁾ With a di/dt of 100 A/ μs

Current Transducer LB 1000-SI/SP2

Isolation characteristics

| | | | |
|-------------|---|------|----|
| V_d | R.m.s. voltage for AC isolation test, 50 Hz, 1 mn | 6 | kV |
| \hat{V}_w | Impulse withstand voltage 1.2/50 μ s | 17 | kV |
| | | Min | |
| dCp | Creepage distance | 54.5 | mm |
| dCl | Clearance distance | 44.4 | mm |
| CTI | Comparative Tracking Index (Group IIIa) | 225 | |

Application examples

According to EN 50178 and CEI 61010-1 standards and following conditions :

- Over voltage category OV 3
- Pollution degree PD2
- Non-uniform field

| | EN 50178 | CEI 61010-1 |
|-----------------------|-------------------------|---------------------|
| dCp, dCl, \hat{V}_w | Rated isolation voltage | Nominal voltage |
| Single isolation | 5000 V | Cat IIIa 5000 V rms |
| Reinforced isolation | 2500 V | Cat IIIa 2500 V rms |

Safety



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the following manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).


Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a built-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

Dimensions LB 1000-SI/SP2 (in mm. 1 mm = 0.0394 inch)

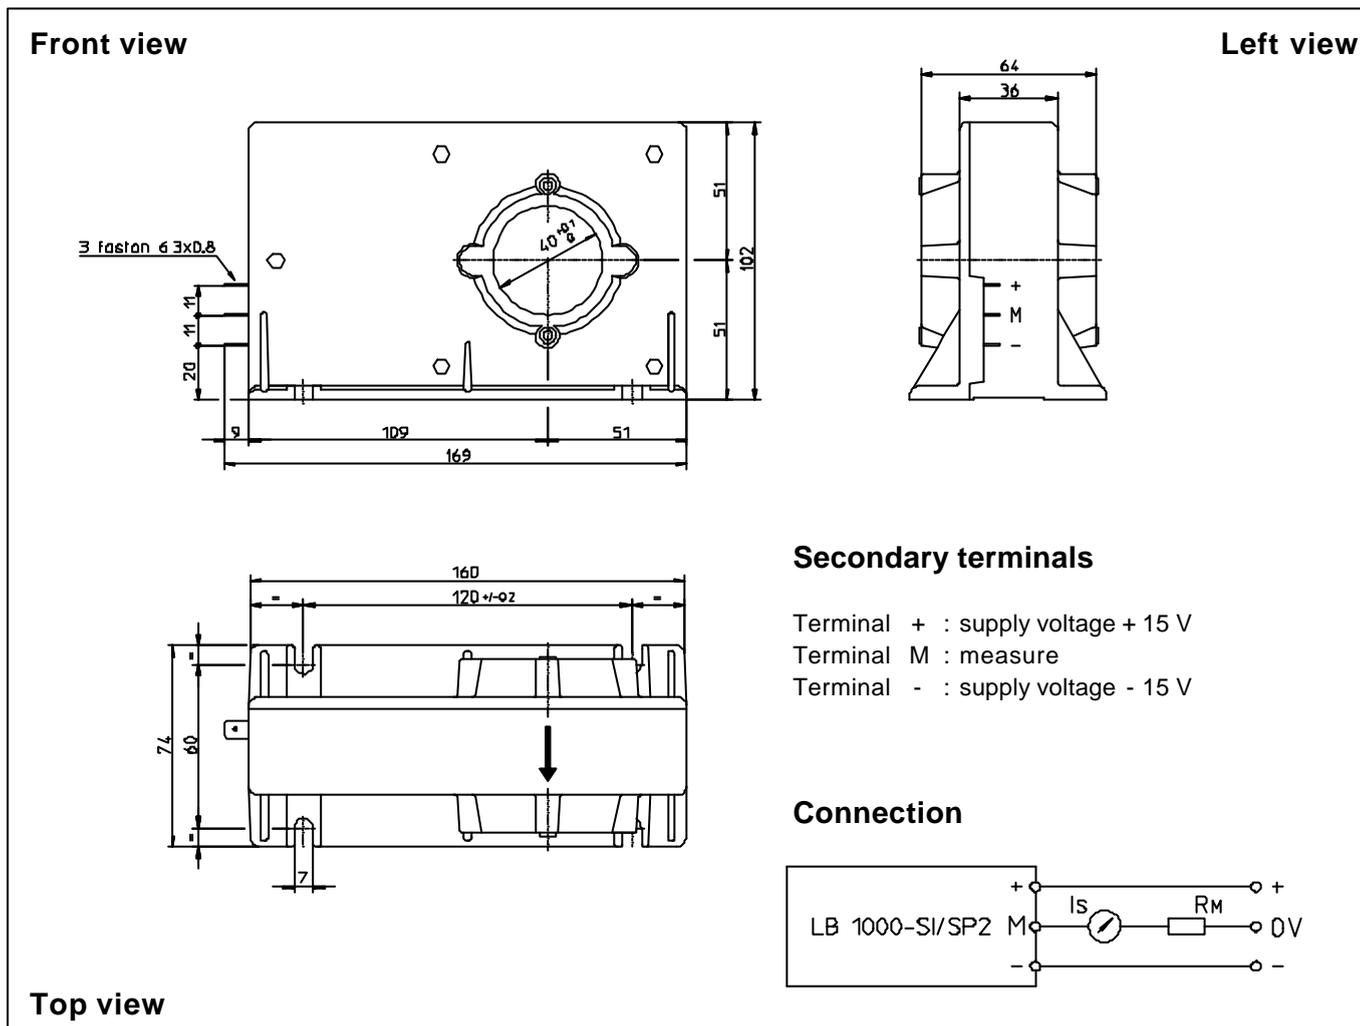

Mechanical characteristics

- General tolerance ± 0.5 mm
- Fastening 4 slots $\varnothing 7$ mm
4 M5 steel screws
Recommended fastening torque 4 Nm or 2.95 Lb. - Ft.
- Primary through-hole $\varnothing 40$ mm
- Connection of secondary Faston 6.3 x 0.8 mm.

Remarks

- I_s is positive when I_p flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 100°C.
- Dynamic performances (di/dt and response time) are best with a single bar completely filling the primary hole.