




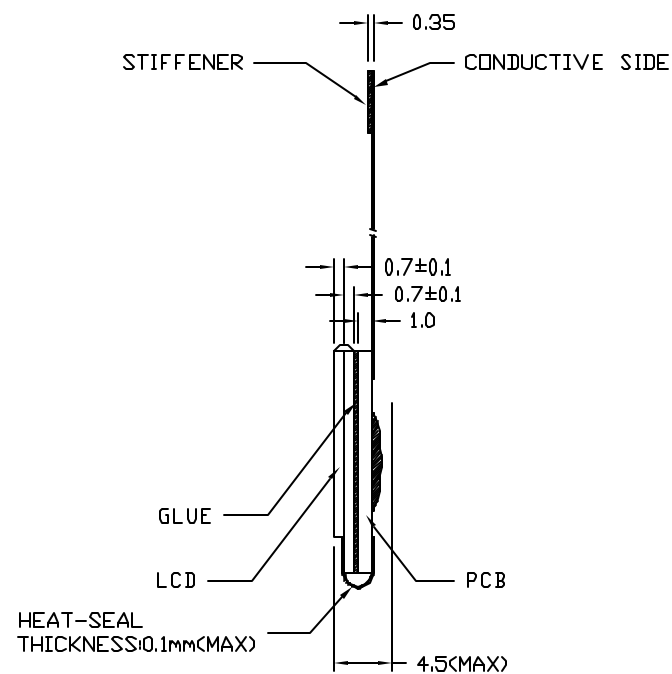


1	2	3	4	5
VDD	VSS	DATA	$\overline{\text{WR}}$	$\overline{\text{CS}}$

DRAWN BY:	TITLE: TMO127AAA6		
CHECKED BY:			
APPROVED BY:	DWG NO: G-3	SCALE:	
CONFIRMED BY:	DWG NAME: TMO127MAAG-3	SHEET NO:	OF

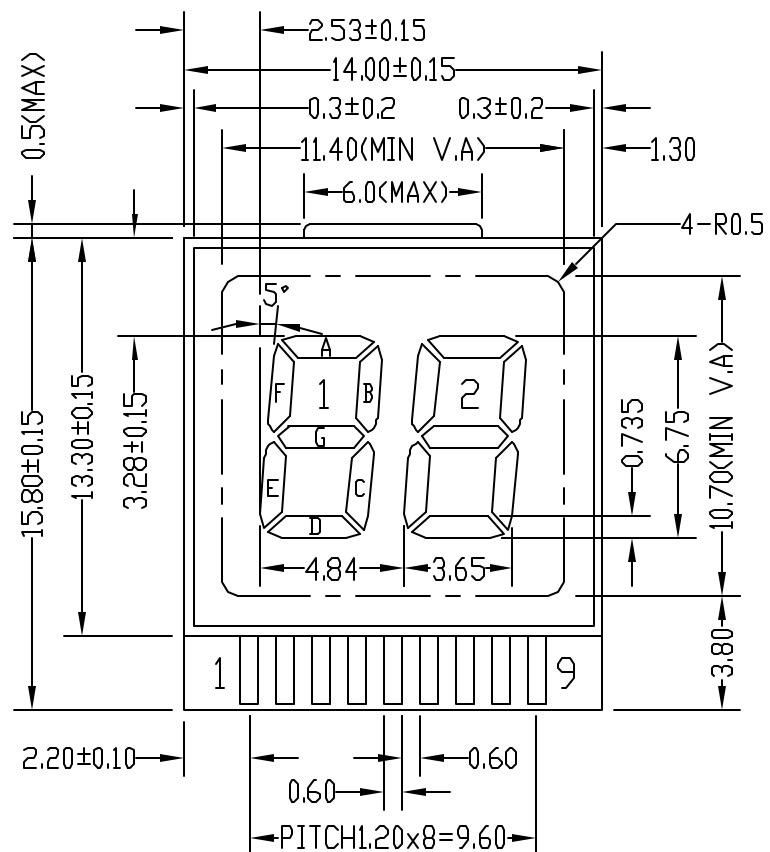


FRONT

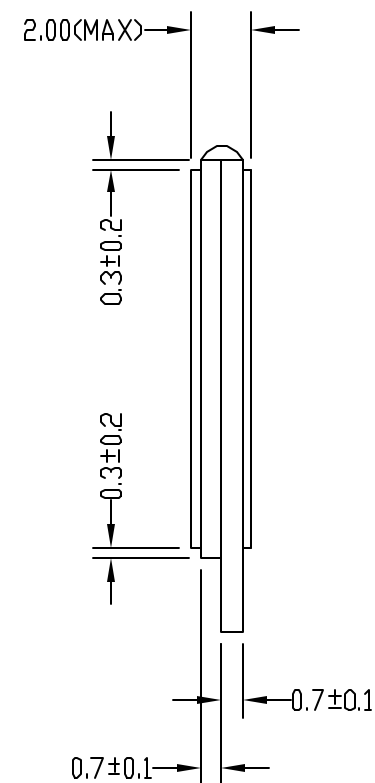

PIN	1	2	3
COM1	COM1	/	1F
COM2	/	COM2	1E
PIN	4	5	6
COM1	1G	1B	2F
COM2	1D	1C	2E
PIN	7	8	9
COM1	2G	2B	1A
COM2	2D	2C	2A

NOTES:

1. DISPLAY TYPE: TN
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: REFLECTIVE/POSITIVE
4. DRIVE METHOD: 1/2 DUTY 1/2 BIAS
5. OPERATING VOLTAGE: 3.3V
6. OPERATING TEMP.: 10°C~+35°C
7. STORAGE TEMP.: -10°C~+60°C
8. CONNECTOR: HEAT-SEAL

 TIANMA MICRO-ELECTRONICS CO.,LTD South, 22/F, Honggu Building, Catic Zone, Shennan Road, Central, Shenzhen, China		
DRAWN BY:	LCD NO: TCM-3185	
CHECKED BY:	DWG NO: TCM-3185-012	
APPROVED BY:	CUSTOMER NO:	SCALE: UNIT: mm
CONFIRMED BY:	SHEET NO: 1 OF 1	