

2-INPUT 1-OUTPUT AUDIO SWITCH

■ GENERAL DESCRIPTION


The NJM2520 is 58k Ω input impedance 2-input 1-output audio switch.

It contains two bias-type inputs and one buffer-type output.

■ FEATURES

- Operating Voltage +4.75V ~ +13V
- Crosstalk (-70dB typ.)
- Input Impedance (58k Ω typ.)
- 2-Input, 1-Output
- Bipolar Technology
- Package Outline DIP8, DMP8, SIP8, SSOP8


■ PACKAGE OUTLINE



NJM2520D



NJM2520M




NJM2520L



NJM2520V


■ PIN CONFIGURATION

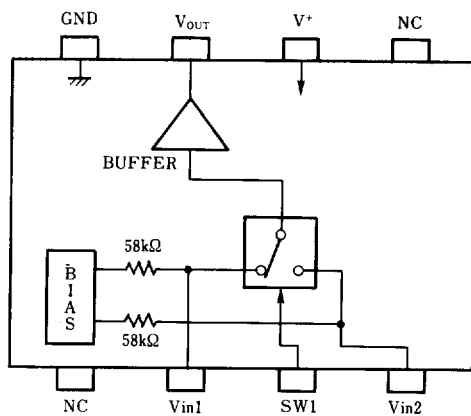

NJM2520D
NJM2520M
NJM2520V

PIN FUNCTION

1. NC
2. Vin1
3. SW1
4. Vin2
5. NC
6. V+
7. Vout
8. GND

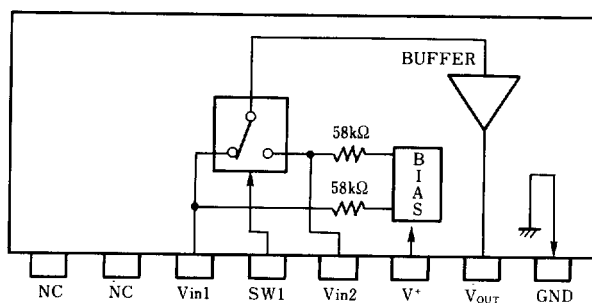

NJM2520L

PIN FUNCTION

1. NC
2. NC
3. Vin1
4. SW1
5. Vin2
6. V+
7. Vout
8. GND



NJM2520

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V*	+15	V
Power Dissipation	P _D	(DIP-8) 500 (DMP-8) 300 (SIP-8) 800 (SSOP-8) 250	mW
Operating Temperature Range	T _{opr}	-20 ~ +75	°C
Storage Temperature Range	T _{stg}	-40 ~ +125	°C

■ ELECTRICAL CHARACTERISTICS

(V*=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V*		+4.7	—	+13.0	V
Operating Current	I _{CC}		—	8.5	11.0	mA
Frequency Characteristics	G _f	V _{in} =2V _{pp} , V _o =10MHz/100kHz	-1.0	0	+1.0	dB
Voltage Gain	G _v	V _{in} =2V _{pp} , 100kHz	-0.5	0	+0.5	dB
Total Harmonic Distortion	THD	V _{in} =2.5V _{pp} , 1kHz	—	0.01	—	%
Output Offset Voltage	V _{off}		-35	0	+35	mV
Switching Voltage	V _{CH}		2.4	—	—	V
	V _{CL}		—	—	0.8	V
Input Impedance	R _i		—	58	—	kΩ
Output Impedance	R _o		—	10	—	Ω