




Inductors

Military, MIL-C-15305 Qualified, Type LT
and Commercial, Molded, Shielded

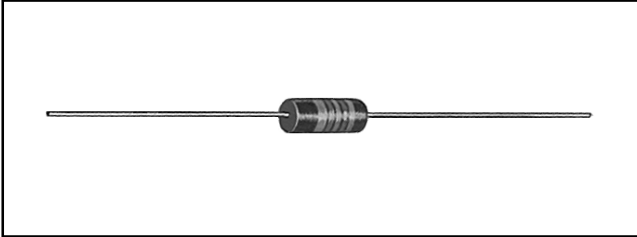

FEATURES

- Wide inductance range in small package.
- Flame retardant coating.
- Electromagnetic shield-finest shield available.
- Epoxy molded construction provides superior moisture protection.
- Precision performance, excellent reliability, sturdy construction.

ELECTRICAL SPECIFICATIONS

- Inductance Tolerance:** ± 10% standard.
± 5% available.
- Insulation Resistance:** 1000 Megohm minimum per MIL-STD-202, Method 302, Test Condition B.
- Dielectric Withstanding Voltage:** 1000 VAC per MIL-STD-202, Method 301 (sea level).
- Percent Coupling:** 3% maximum per MIL-C-15305.
- Operating Temperature Range:** - 55°C to + 105°C.

MECHANICAL SPECIFICATIONS

- Terminal Strength:** 5 pounds pull per MIL-STD-202, Method 211, Test Condition A.
- Weight:** IMS-5 = .85 grams maximum.


MATERIAL SPECIFICATIONS

- Encapsulant:** Epoxy.
- Standard Terminal:** #22 AWG tinned copper.

INDUCTANCE RANGE AND MILITARY STANDARD						
INDUCTANCE RANGE		CLASSIFICATION		MATERIAL		MILITARY STANDARD
FROM	TO	GRADE	CLASS	CORE	SHIELD	
.10μH	.82μH	1	A	Phenolic	Powd. Iron	MS75087
1.0μH	12.0μH	1	A	Powd. Iron	Powd. Iron	MS75088
15.0μH	100,000μH	1	A	Ferrite	Ferrite	MS75089*

*Not QPL'd.

ENVIRONMENTAL PERFORMANCE		
TEST	CONDITIONS	SPECIFICATIONS
Barometric Pressure	Test Condition C	MIL-STD-202, Method 105
Thermal Shock	Test Condition A-1	MIL-STD-202, Method 107
Flammability	—	MIL-STD-202, Method 111
Overload	—	MIL-C-15305
Low Temperature Storage	—	MIL-C-15305
Resistance to Soldering Heat	Test Condition A	MIL-STD-202, Method 210
Resistance to Solvents	—	MIL-STD-202, Method 215

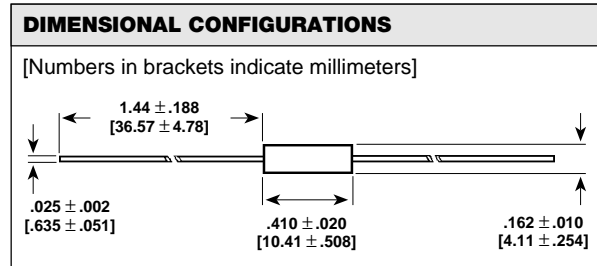

STANDARD ELECTRICAL SPECIFICATIONS									
IND. (μH)	TOL.	MILITARY STANDARD	MILITARY TYPE	Q MIN.	TEST FREQ. L & Q (MHz)	SELF-RESONANT * FREQ. MIN. (MHz)	DCR @ 25°C MAX. (Ohms)	RATED DC ** CURRENT (mA)	INCREMENTAL *** CURRENT (mA)
		MS75087	LT10K						
.10	± 10%	-1	191	50	25.0	250.0	.025	1790	—
.12	± 10%	-2	192	51	25.0	250.0	.034	1530	—
.15	± 10%	-3	193	51	25.0	250.0	.037	1470	—
.18	± 10%	-4	194	50	25.0	250.0	.047	1300	—
.22	± 10%	-5	195	49	25.0	250.0	.067	1100	—
.27	± 10%	-6	196	47	25.0	250.0	.11	855	—
.33	± 10%	-7	197	46	25.0	250.0	.13	780	—
.39	± 10%	-8	198	44	25.0	250.0	.18	670	—
.47	± 10%	-9	199	44	25.0	235.0	.25	565	—
.56	± 10%	-10	200	43	25.0	210.0	.33	490	—
.68	± 10%	-11	201	42	25.0	190.0	.45	420	—
.82	± 10%	-12	202	40	25.0	180.0	.59	370	—
		MS75088	LT10K						
1.0	± 10%	-1	203	44	25.0	140.0	.07	1070	—
1.2	± 10%	-2	204	44	7.9	130.0	.10	895	—

*Measured with full length lead. **Rated DC Current: Based on maximum temperature rise not to exceed 15°C at + 90°C ambient.
***Incremental Current: The minimum typical current at which the inductance will be decreased by 5% from its initial zero DC value.

NOTE: Listing of Military Standard does not imply qualification. Contact factory for latest government QPL information.



STANDARD ELECTRICAL SPECIFICATIONS												
IND. (μ H)	TOL.	MILITARY STANDARD	MILITARY TYPE	Q MIN.	TEST FREQ. L & Q (MHz)	SELF-RESONANT * FREQ. MIN. (MHz)	DCR @ 25°C MAX. (Ohms)	RATED DC ** CURRENT (mA)	INCREMENTAL*** CURRENT (mA)			
1.5	± 10%	-3	205	44	7.9	115.0	.12	815	—			
1.8	± 10%	-4	206	44	7.9	105.0	.14	775	—			
2.2	± 10%	-5	207	44	7.9	100.0	.19	650	—			
2.7	± 10%	-6	208	44	7.9	92.0	.28	535	—			
3.3	± 10%	-7	209	44	7.9	85.0	.35	480	—			
3.9	± 10%	-8	210	44	7.9	75.0	.40	450	—			
4.7	± 10%	-9	211	44	7.9	70.0	.55	380	—			
5.6	± 10%	-10	212	44	7.9	65.0	.72	335	—			
6.8	± 10%	-11	213	50	7.9	55.0	1.02	280	—			
8.2	± 10%	-12	214	50	7.9	50.0	1.32	250	—			
10.0	± 10%	-13	215	50	7.9	46.0	1.62	220	—			
12.0	± 10%	-14	216	55	2.5	44.0	2.0	200	—			
		MS75089 (Not QPL'd)	LT10K									
15.0	± 10%	-1	217	45	2.5	49.0	.80	315	250.0			
18.0	± 10%	-2	218	45	2.5	45.0	.89	300	235.0			
22.0	± 10%	-3	219	45	2.5	41.0	.96	290	220.0			
27.0	± 10%	-4	220	45	2.5	38.0	1.19	260	200.0			
33.0	± 10%	-5	221	45	2.5	34.0	1.37	240	190.0			
39.0	± 10%	-6	222	50	2.5	29.0	1.93	205	180.0			
47.0	± 10%	-7	223	50	2.5	27.0	2.11	195	175.0			
56.0	± 10%	-8	224	50	2.5	25.0	2.23	190	160.0			
68.0	± 10%	-9	225	50	2.5	21.0	2.70	170	150.0			
82.0	± 10%	-10	226	50	2.5	10.5	2.44	180	140.0			
100.0	± 10%	-11	227	50	2.5	10.0	3.12	160	120.0			
120.0	± 10%	-12	228	55	.79	9.7	3.6	150	95.0			
150.0	± 10%	-13	229	55	.79	8.5	4.1	140	90.0			
180.0	± 10%	-14	230	55	.79	8.0	4.4	135	85.0			
220.0	± 10%	-15	231	55	.79	7.5	5.0	125	80.0			
270.0	± 10%	-16	232	55	.79	7.0	5.8	115	70.0			
330.0	± 10%	-17	233	55	.79	6.5	6.4	110	65.0			
390.0	± 10%	-18	234	60	.79	6.2	7.4	105	60.0			
470.0	± 10%	-19	235	60	.79	5.7	9.5	92	58.0			
560.0	± 10%	-20	236	60	.79	4.7	10.5	90	55.0			
680.0	± 10%	-21	237	60	.79	4.5	11.8	80	50.0			
820.0	± 10%	-22	238	60	.79	4.2	13.0	80	45.0			
		MS75089 (Not QPL'd)	LT10K									
1000.0	± 10%	-23	239	60	.79	3.8	17.5	70	40.0			
1200.0	± 10%	-24	240	45	.25	1.5	22.1	60	35.0			
1500.0	± 10%	-25	241	45	.25	1.2	26.5	55	33.0			
1800.0	± 10%	-26	242	45	.25	1.0	29.9	50	30.0			
2200.0	± 10%	-27	243	45	.25	.97	33.8	50	27.0			
2700.0	± 10%	-28	244	45	.25	.92	47.3	40	25.0			
3300.0	± 10%	-29	245	45	.25	.84	53.0	40	22.0			
3900.0	± 10%	-30	246	45	.25	.80	73.8	35	20.0			
4700.0	± 10%	-31	247	45	.25	.74	81.6	31	19.0			
5600.0	± 10%	-32	248	44	.25	.73	98.9	28	17.0			
6800.0	± 10%	-33	249	40	.25	.66	111.0	27	16.0			
8200.0	± 10%	-34	250	40	.25	.54	119.0	26	15.0			
10000.0	± 10%	-35	251	40	.25	.47	137.0	24	14.0			
12000.0	± 10%	-36	252	30	.079	.33	143.0	23	13.0			
15000.0	± 10%	-37	253	30	.079	.29	157.0	22	12.0			
18000.0	± 10%	-38	254	30	.079	.28	175.0	21	10.0			
22000.0	± 10%	-39	255	27	.079	.25	274.0	17	9.0			
27000.0	± 10%	-40	256	27	.079	.21	308.0	16	8.0			
33000.0	± 10%	-41	257	27	.079	.19	343.0	15	7.5			
39000.0	± 10%	-42	258	27	.079	.17	376.0	15	6.0			
47000.0	± 10%	-43	259	23	.079	.16	473.0	13	5.5			
56000.0	± 10%	-44	260	23	.079	.14	512.0	13	5.0			
68000.0	± 10%	-45	261	23	.079	.13	580.0	12	4.0			
82000.0	± 10%	-46	262	21	.079	.12	618.0	11	3.5			
100000.0	± 10%	-47	263	18	.079	.11	678.0	11	3.0			

*Measured with full length lead. **Rated DC Current: Based on maximum temperature rise not to exceed 15°C at + 90°C ambient.

***Incremental Current: The minimum typical current at which the inductance will be decreased by 5% from its initial zero DC value.

NOTE: Listing of Military Standard does not imply qualification. Contact factory for latest government QPL information.

HOW TO ORDER		
IMS-5	10 μ H	± 10%
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE

HOW TO ORDER - MILITARY PART NUMBER							
MS75088	-13	OR	LT	10	K	215	
MILITARY STANDARD	INDUCTANCE VALUE		TYPE	GRADE AND CLASS	FAMILY	ID NUMBER	