


Sidac High Voltage Bilateral Triggers

...bi-directional devices designed for direct interface with the ac power line. Upon reaching the breakover voltage in each direction, the device switches from a blocking state to a low voltage on-state. Conduction will continue like an SCR until the main terminal current drops below the holding current. The plastic axial lead package provides high pulse current capability at low cost. Glass passivation insures reliable operation. Applications are:

- High Pressure Sodium Vapor Lighting
- Strokes and Flashers
- Ignitors
- High Voltage Regulators
- Pulse Generators
- Ordering Information:
Shipped in Tape & Reel – Add "RL" suffix to device number,
i.e. MKP3V120RL

MKP3V120
MKP3V240

SIDACs
1 AMPERE RMS
120 and 240 VOLTS



CASE 267-03
SURMETIC 50
PLASTIC AXIAL

MAXIMUM RATINGS (T_J = 25°C unless otherwise noted)

| Rating | Symbol | Min | Max | Unit |
|--|---------------------|------------|------------|-------|
| Repetitive Breakover Voltage MKP3V120 MKP3V240 | V _(BO) | 110 220 | 130 250 | Volts |
| Off-State Repetitive Voltage | V _{DRM} | — | ± 90 | Volts |
| On-State RMS Current | I _{T(RMS)} | — | 1 | Amp |
| On-State Surge Current (Non-repetitive) (60 Hz One Cycle Sine Wave, Peak Value) | I _{TSM} | — | 20 | Amps |
| Operating Junction Temperature Range | T _J | −40 | +125 | °C |
| Storage Temperature Range | T _{stg} | −40 | +150 | °C |
| Lead Solder Temperature (Lead Length ≥ 1/16" from Case, 10 s Max) | — | — | +230 | °C |

THERMAL CHARACTERISTICS

| Characteristic | Symbol | Min | Max | Unit |
|--|------------------|-----|-----|------|
| Thermal Resistance, Junction to Lead (Lead Length = 3/8") | R _{θJL} | — | 15 | °C/W |



MKP3V120 MKP3V240

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted; both directions)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|--|------------------|------------|--------|------------|------------------------|
| Repetitive Breakover Voltage MKP3V120 MKP3V240 | $V_{(BO)}$ | 110 220 | — — | 130 250 | Volts |
| Breakover Current | $I_{(BO)}$ | — | — | 200 | μA |
| Repetitive Peak Off-State Current (60 Hz Sine Wave, $V_D = 90\text{ V}$) | I_{DRM} | — | — | 10 | μA |
| Forward "On" Voltage ($I_{\text{TM}} = 1\text{ A Peak}$) | V_{TM} | — | 1.1 | 1.5 | Volts |
| Dynamic Holding Current (60 Hz Sine Wave, $R_L = 100\Omega$) | I_H | — | — | 100 | mA |
| Switching Resistance | R_S | 0.1 | — | — | $\text{k}\Omega$ |
| Maximum Rate of Change of On-State Current | di/dt | — | 50 | — | $\text{A}/\mu\text{s}$ |

CURRENT DERATING

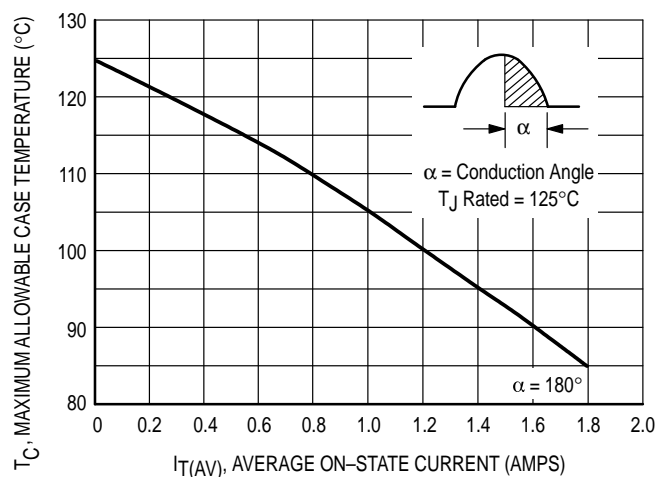


Figure 1. Maximum Case Temperature

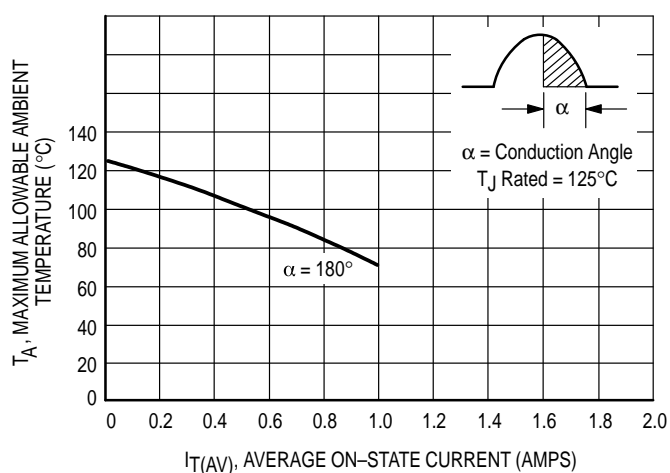


Figure 2. Maximum Ambient Temperature

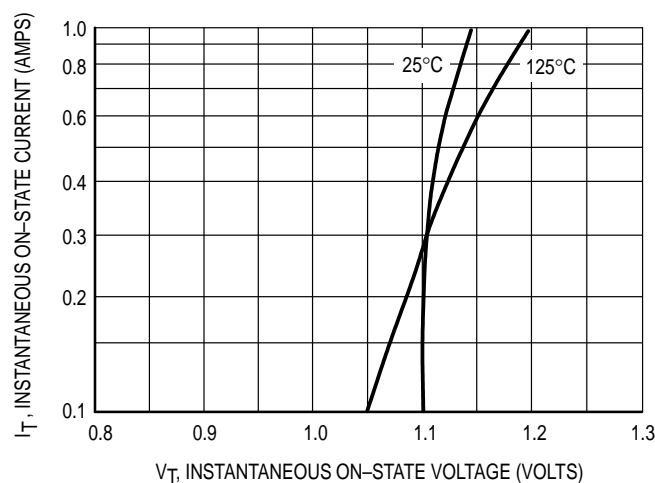


Figure 3. Typical Forward Voltage

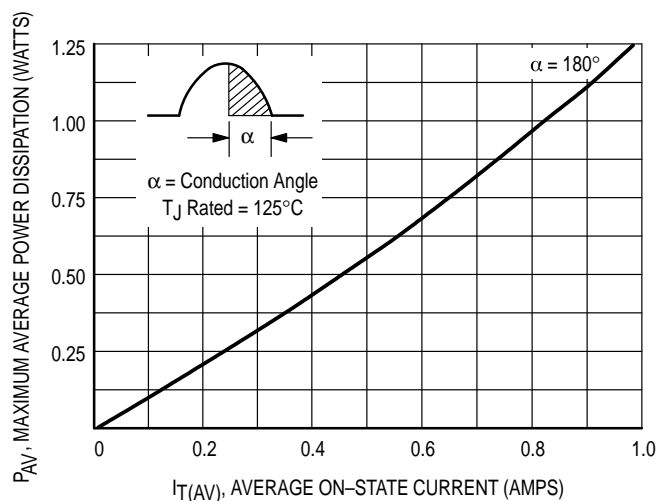


Figure 4. Power Dissipation

THERMAL CHARACTERISTICS

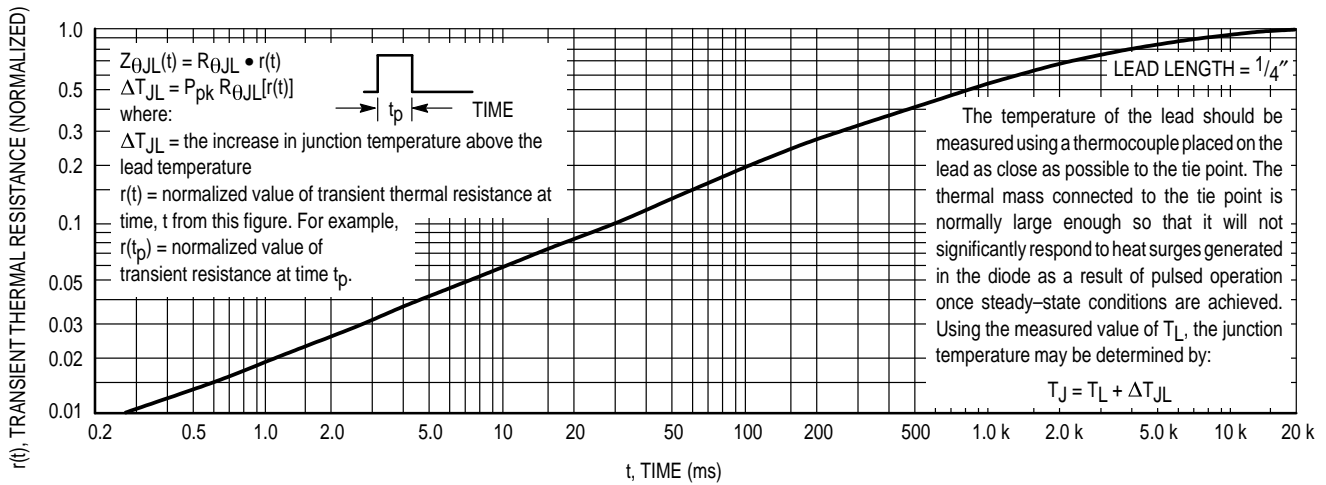


Figure 5. Thermal Response

TYPICAL CHARACTERISTICS

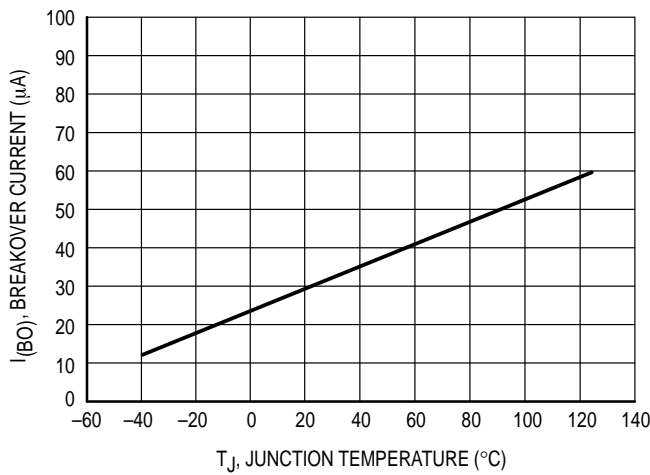


Figure 6. Breakover Current

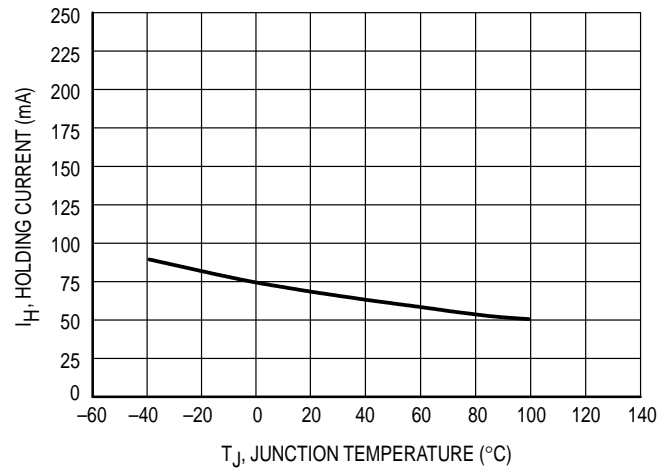


Figure 7. Holding Current


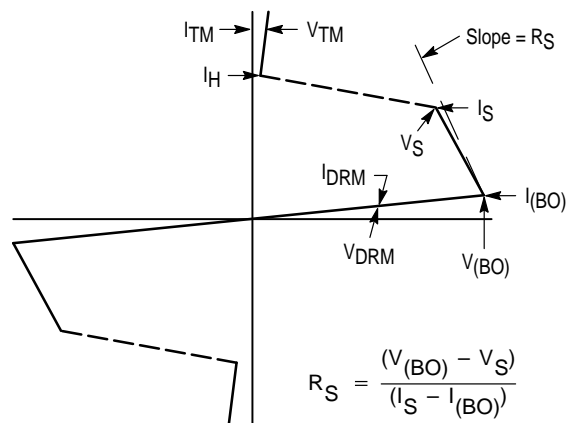


Figure 8. V-I Characteristics

PACKAGE DIMENSIONS

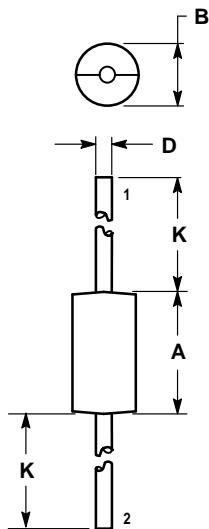


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES | | MILLIMETERS | |
|-----|--------|-------|-------------|------|
| | MIN | MAX | MIN | MAX |
| A | 0.370 | 0.380 | 9.40 | 9.65 |
| B | 0.190 | 0.210 | 4.83 | 5.33 |
| D | 0.048 | 0.052 | 1.22 | 1.32 |
| K | 1.000 | — | 25.40 | — |

CASE 267-03

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

JAPAN: Motorola Japan Ltd.; SPD, Strategic Planning Office, 141,
4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan. 81-3-5487-8488

Customer Focus Center: 1-800-521-6274

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 1-602-244-6609
Motorola Fax Back System – US & Canada ONLY 1-800-774-1848
– <http://sps.motorola.com/mfax/>

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Centre,
2, Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.
852-26629298

HOME PAGE: <http://motorola.com/sps/>**MOTOROLA**