

TOSHIBA LED LAMP GaAlAs INFRARED EMITTER

# TLN208

INFRARED LIGHT-EMISSION DIODE FOR STILL CAMERA

LIGHT SOURCE FOR AUTO FOCUS

- Optical radiation of current confining LED chip is condensed by a resin lens.
- High output
- Effective emission diameter of 344  $\mu\text{m}$
- Optical output efficiently radiated in solid angle of 0.685 sr
- Can be operated at  $V_{CC} = 3\text{ V}$  (which is equal to is two cells)
- Optical output vs. temperature characteristic almost constant with constant forward voltage drive system

MAXIMUM RATINGS ( $T_a = 25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Forward Current (Note 1)	$I_F$	50	mA
Pulse Forward Current (Note 2)	$I_{FP}$	400	mA
Reverse Voltage	$V_R$	1	V
Operating Temperature	$T_{opr}$	-25~60	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40~90	$^\circ\text{C}$


(Note 1) : Permissible value for acceptance inspection / characteristic test and is guaranteed for actual application

(Note 2) : Within 4 hours at 1 cycle with frequency 10 kHz, duty 50%, power applied for 0.1 s paused for 0.4 s

OPTICAL AND ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	TEST CONDITION	Min	Typ.	Max	UNIT
Forward Voltage	$V_F$	$I_F = 50\text{ mA}$	—	1.35	—	V
Pulse Forward Voltage	$V_{FP}$	$I_{FP} = 300\text{ mA}, t = 10\text{ ms}$	—	1.75	1.95	V
Reverse Current	$I_R$	$V_R = 1\text{ V}$	—	—	100	$\mu\text{A}$
Effective emission spot diameter	—	—	—	344	—	$\mu\text{m}$
Radiation Flux (Note)	$\phi_e$	$I_{FP} = 300\text{ mA}, t = 10\text{ ms}$	7	12	—	mW
Half Value Angle	$\theta_{\frac{1}{2}}$	$I_F = 50\text{ mA}$	—	54	—	$^\circ$
Peak Emission Wavelength	$\lambda_P$	$I_F = 50\text{ mA}$	—	875	—	nm
Spectral Line Half Width	$\Delta\lambda$	$I_F = 50\text{ mA}$	—	40	—	nm

(Note) : Luminous radiation output to effective angle  $\pm 25$  degree.





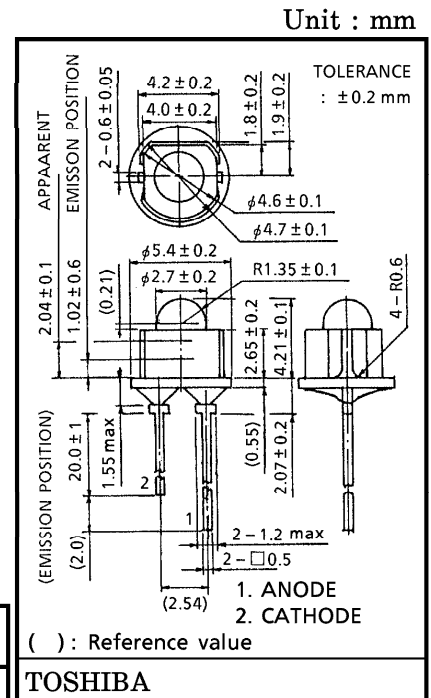


Weight : 0.17 g (typ.)

**PRECAUTIONS**

Please be careful of the followings.

1. Soldering temperature : 260°C max  
Soldering time : 5 s max  
(Soldering must be performed 1.5 mm from the bottom of the package.)
2. When forming the leads, bend each lead under the 2 mm from the body of the device.  
Soldering must be performed after the leads have been formed.
3. The TLN208 for a camera AF use only. Please do not use this device except for a camera.

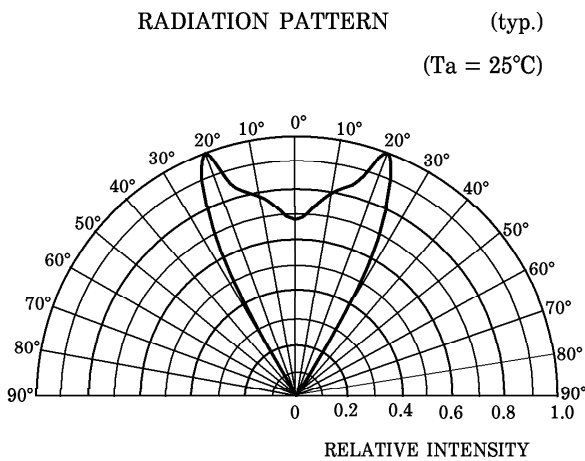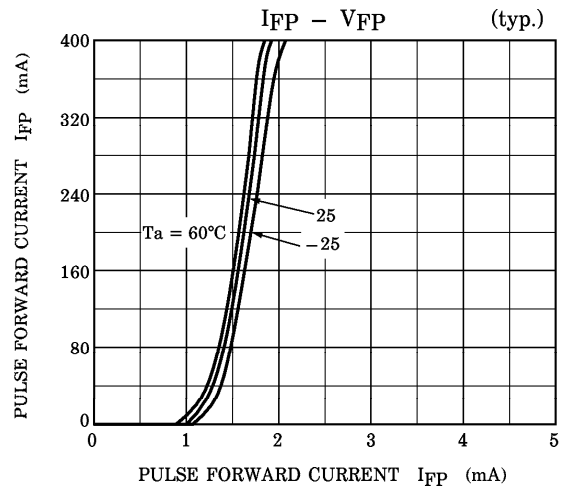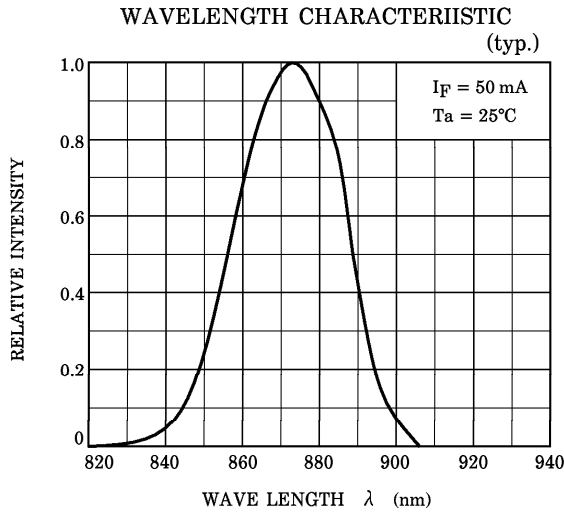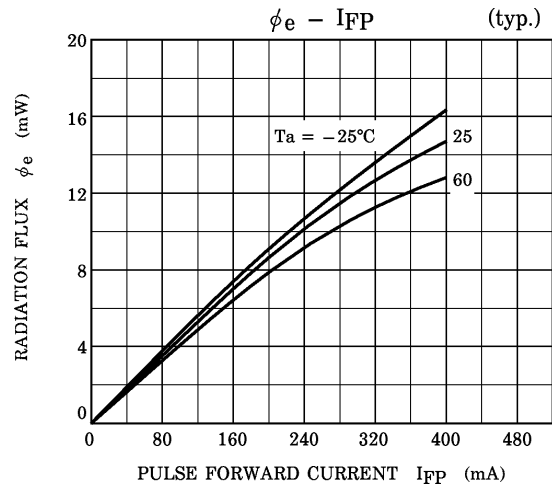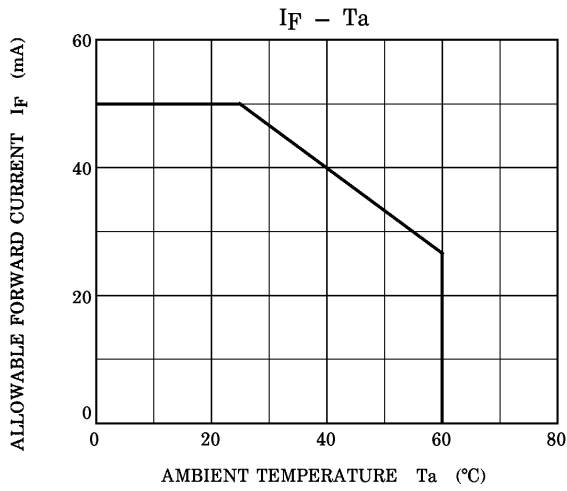

**RESTRICTIONS ON PRODUCT USE**

000707EAC

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.