

## Sub-miniature Relay that Switches up to 5 A

- Sub-miniature: 20 x 10 x 10 mm (L x W x H).
- Low power consumption: 200 mW.
- Unique moving loop armature reduces relay size, magnetic interference, and contact bounce time.
- Single- and double-winding latching types also available.



## Ordering Information

| Classification                   | Contact form    | Straight PCB  | Self-clinching PCB |
|----------------------------------|-----------------|---------------|--------------------|
| Single-side stable               | SPST-NO         | G6B-1114P-US  | G6B-1114C-US       |
|                                  | SPST-NO+SPST-NC | G6B-2114P-US  | G6B-2114C-US       |
|                                  | DPST-NO         | G6B-2214P-US  | G6B-2214C-US       |
|                                  | DPST-NC         | G6B-2014P-US  | G6B-2014C-US       |
| Single-winding latching          | SPST-NO         | G6BU-1114P-US | G6BU-1114C-US      |
| Double-winding latching          | SPST-NO         | G6BK-1114P-US | G6BK-1114C-US      |
| High-capacity single-side stable | SPST-NO         | G6B-1174P-US  | G6B-1174C-US       |

**Note:** When ordering, add the rated coil voltage to the model number.

Example: G6B-1114P-US 12 VDC



### Model Number Legend

G6B  -     -   VDC  
 1 2 3 4 5 6 7

#### 1. Relay Function

- None: Single-side stable
- U: Single-winding latching
- K: Double-winding latching

#### 2. Contact Form

- 21: SPST-NO + SPST-NC
- 22: DPST-NO
- 20: DPST-NC
- 11: SPST-NO

#### 3. Contact Type

- 1: Standard
- 7: High-capacity

#### 4. Enclosure Ratings

- 4: Fully sealed

#### 5. Terminals

- P: Straight PCB
- C: Self-clinching PCB

#### 6. Approved Standards

- US: UL/CSA certified

#### 7. Rated Coil Voltage

- 5, 6, 12, 24 VDC

## Accessories (Order Separately)

### Back Connecting Sockets

| Applicable relay | Back connecting socket* |
|------------------|-------------------------|
| G6B(U)-1114P-US  | P6B-04P                 |
| G6BK-1114P-US    | P6B-06P                 |
| G6B-2114P-US     | P6B-26P                 |
| G6B-1174P-US     | P6B-04P                 |

|                 |        |
|-----------------|--------|
| Removal Tool    | P6B-Y1 |
| Hold-down Clips | P6B-C2 |

\*Not applicable to the self-clinching type.

## Specifications

## ■ Coil Ratings

## Single-side Stable Type

| Item                                |              | SPST-NO                         |       |         |         |         | SPST-NO + SPST-NC, DPST-NO, DPST-NC |        |       |        |         |
|-------------------------------------|--------------|---------------------------------|-------|---------|---------|---------|-------------------------------------|--------|-------|--------|---------|
| Rated voltage                       |              | 3 VDC                           | 5 VDC | 6 VDC   | 12 VDC  | 24 VDC  | 3 VDC                               | 5 VDC  | 6 VDC | 12 VDC | 24 VDC  |
| Rated current                       |              | 67 mA                           | 40 mA | 33.3 mA | 16.7 mA | 8.3 mA  | 100 mA                              | 60 mA  | 50 mA | 25 v   | 12.5 mA |
| Coil resistance                     |              | 45 Ω                            | 125 Ω | 180 Ω   | 720 Ω   | 2,880 Ω | 30 Ω                                | 83.3 Ω | 120 Ω | 480 Ω  | 1,920 Ω |
| Coil inductance<br>(H) (ref. value) | Armature OFF | 0.20                            | 0.28  | 0.31    | 1.2     | 4.9     | –                                   | –      | –     | –      | –       |
|                                     | Armature ON  | 0.18                            | 0.26  | 0.28    | 1.1     | 4.1     | –                                   | –      | –     | –      | –       |
| Must operate voltage                |              | 70% max. of rated voltage       |       |         |         |         | 80% max. of rated voltage           |        |       |        |         |
| Must release voltage                |              | 10% min. of rated voltage       |       |         |         |         |                                     |        |       |        |         |
| Max. voltage                        |              | 160% of rated voltage (at 23°C) |       |         |         |         | 140% of rated voltage (at 23°C)     |        |       |        |         |
| Power consumption                   |              | Approx. 200 mW                  |       |         |         |         | Approx. 300 mW                      |        |       |        |         |

## Single-winding Latching Type

|                                     |              |                                 |       |         |         |         |
|-------------------------------------|--------------|---------------------------------|-------|---------|---------|---------|
| Rated voltage                       |              | 3 VDC                           | 5 VDC | 6 VDC   | 12 VDC  | 24 VDC  |
| Rated current                       |              | 67 mA                           | 40 mA | 33.3 mA | 16.7 mA | 8.3 mA  |
| Coil resistance                     |              | 45 Ω                            | 125 Ω | 180 Ω   | 720 Ω   | 2,880 Ω |
| Coil inductance<br>(H) (ref. value) | Armature OFF | 0.20                            | 0.28  | 0.31    | 1.2     | 4.9     |
|                                     | Armature ON  | 0.18                            | 0.26  | 0.28    | 1.1     | 4.1     |
| Must operate voltage                |              | 70% max. of rated voltage       |       |         |         |         |
| Must release voltage                |              | 70% min. of rated voltage       |       |         |         |         |
| Max. voltage                        |              | 160% of rated voltage (at 23°C) |       |         |         |         |
| Power consumption                   |              | Approx. 200 mW                  |       |         |         |         |

## Double-winding Latching Type

|                    |                                     |  |        |         |         |         |     |
|--------------------|-------------------------------------|--|--------|---------|---------|---------|-----|
| Rated voltage      |                                     | 3 VDC  | 5 VDC  | 6 VDC   | 12 VDC  | 24 VDC  |     |
| Set coil           | Rated current                       | 93.2 mA  | 56 mA  | 46.8 mA | 23.3 mA | 11.7 mA |     |
|                    | Coil resistance                     | 32.2 Ω   | 89.2 Ω | 128.5 Ω | 515 Ω   | 2,060 Ω |     |
|                    | Coil inductance<br>(H) (ref. value) | Armature OFF   | 0.11   | 0.15    | 0.18    | 0.52    | 1.2 |
|                    |                                     | Armature ON  | 0.11   | 0.15    | 0.18    | 0.52    | 1.2 |
| Reset coil         | Rated current                       | 93.2 mA  | 56 mA  | 46.8 mA | 23.3 mA | 11.7 mA |     |
|                    | Coil resistance                     | 32.2 Ω   | 89.2 Ω | 128.5 Ω | 515 Ω   | 2,060 Ω |     |
|                    | Coil inductance<br>(H) (ref. value) | Armature OFF   | 0.11   | 0.15    | 0.18    | 0.52    | 1.2 |
|                    |                                     | Armature ON  | 0.11   | 0.15    | 0.18    | 0.52    | 1.2 |
| Must set voltage   |                                     | 70% max. of rated voltage                              |        |         |         |         |     |
| Must reset voltage |                                     | 70% min. of rated voltage                              |        |         |         |         |     |
| Max. voltage       |                                     | 130% of rated voltage (at 23°C)                        |        |         |         |         |     |
| Power consumption  |                                     | Set coil: Approx. 280 mW<br>Reset coil: Approx. 280 mW |        |         |         |         |     |

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.  
2. Operating characteristics are measured at a coil temperature of 23°C.

## ■ Contact Ratings

| Item                                  | SPST-NO                              |  | SPST-NO + SPST-NC, DPST-NO, DPST-NC  |  |
|---------------------------------------|--------------------------------------|--|--------------------------------------|--|
|                                       | Resistive load<br>( $\cos\phi = 1$ ) | Inductive load<br>( $\cos\phi = 0.4$ ; L/R = 7 ms) | Resistive load<br>( $\cos\phi = 1$ ) | Inductive load<br>( $\cos\phi = 0.4$ ; L/R = 7 ms) |
| <b>Rated load</b>                     | 5 A at 250 VAC;<br>5 A at 30 VDC     | 2 A at 250 VAC;<br>2 A at 30 VDC                   | 5 A at 250 VAC;<br>5 A at 30 VDC     | 1.5 A at 250 VAC;<br>1.5 A at 30 VDC               |
| <b>Contact material</b>               | AgCdO (Cd free planned 1 Apr 05)     |  |                                      |  |
| <b>Rated carry current</b>            | 5 A                                  |  |                                      |  |
| <b>Max. switching voltage</b>         | 380 VAC, 125 VDC                     |  |                                      |  |
| <b>Max. switching current</b>         | 5 A                                  |  |                                      |  |
| <b>Max. switching power</b>           | 1,250 VA, 150 W                      | 500 VA, 60 W                                       | 1,250 VA, 150 W                      | 375 VA, 80 W                                       |
| <b>Failure rate (reference value)</b> | 10 mA at 5 VDC                       |  |                                      |  |

| Item                                  | SPST-NO (High-capacity)           |   |
|---------------------------------------|-----------------------------------|---|
|                                       | Resistive load ( $\cos\phi = 1$ ) | Inductive load ( $\cos\phi = 0.4$ ; L/R = 7 ms) |
| <b>Rated load</b>                     | 8 A at 250 VAC; 5 A at 30 VDC     | 2 A at 250 VAC; 2 A at 30 VDC                   |
| <b>Contact material</b>               | AgCdO                             |   |
| <b>Rated carry current</b>            | 8 A                               |   |
| <b>Max. switching voltage</b>         | 380 VAC, 125 VDC                  |   |
| <b>Max. switching current</b>         | 8 A                               |   |
| <b>Max. switching power</b>           | 2,000 VA, 150 W                   |   |
| <b>Failure rate (reference value)</b> | 10 mA at 5 VDC                    |   |

Note: P level:  $\lambda_{60} = 0.1 \times 10^{-6}$ /operation

## ■ Characteristics

|                                    |   |
|------------------------------------|---|
| <b>Contact resistance</b>          | 30 m $\Omega$ max.  |
| <b>Operate (set) time</b>          | 10 ms max. (mean value: 1-pole approx. 3 ms, 2-pole approx. 4 ms)   |
| <b>Release (reset) time</b>        | Single-side stable types: 10 ms max. (mean value: 1-pole approx. 1 ms, 2-pole approx. 2 ms)<br>Latching types: 10 ms max. (mean value: approx. 3 ms)  |
| <b>Min. set/reset signal width</b> | Latching type: 15 ms min. (at 23°C)   |
| <b>Max. operating frequency</b>    | Mechanical: 18,000 operations/hr<br>Electrical: 1,800 operations/hr (under rated load)  |
| <b>Insulation resistance</b>       | 1,000 M $\Omega$ min. (at 500 VDC, at 250 VDC between set coil and reset coil)  |
| <b>Dielectric strength</b>         | 3,000 VAC (Latching types: 2,000 VAC), 50/60 Hz for 1 min between coil and contacts<br>1,000 VAC, 50/60 Hz for 1 min between contacts of same polarity<br>250 VAC, 50/60 Hz for 1 min between set and reset coils<br>2,000 VAC, 50/60 Hz for 1 min between contacts of different polarity |
| <b>Vibration resistance</b>        | Destruction: 10 to 55 to 10 Hz, 0.75mm single amplitude (1.5mm double amplitude)<br>Malfunction: 10 to 55 to 10 Hz, 0.75mm single amplitude (1.5mm double amplitude)  |
| <b>Shock resistance</b>            | Destruction: 1,000 m/s <sup>2</sup><br>Malfunction: Single-side stable: 100 m/s <sup>2</sup> ; Latching: 300 m/s <sup>2</sup>   |
| <b>Endurance</b>                   | Mechanical: 50,000,000 operations min. (at 18,000 operations/hr)<br>Electrical: 100,000 operation min. (at 1,800 operations/hr)   |
| <b>Ambient temperature</b>         | Operating: -25°C to 70°C (with no icing)  |
| <b>Ambient humidity</b>            | Operating: 5% to 85%  |
| <b>Weight</b>                      | Double-winding latching: Approx. 3.7 g<br>High-capacity: Approx. 4.6 g<br>Double pole: Approx. 4.5 g<br>Other: Approx. 3.5 g  |

Note: The data shown above are initial values.

■ Approved Standards

UL508 (File No. E41643)/CSA C22.2 No.14 (File No. LR31928)


EN 61810-1 (VDE Reg No. 5361)/Connector EN 61984 (VDE Reg No. 125603)

| Model  | Contact form                            | Coil ratings | Contact ratings  |
|--|---|--------------|--|
| G6B-1114P-US<br>G6B-1114C-US<br>G6BU-1114P-US<br>G6BU-1114C-US<br>G6BK-1114P-US<br>G6BK-1114C-US | SPST-NO                                 | 3 to 24 VDC  | 5 A, 250 VAC (general use)<br>5 A, 30 VDC (resistive load) |
| G6B-1174P-US<br>G6B-1174C-US   |   |              | 8 A, 250 VAC (general use)<br>8 A, 30 VDC (resistive load) |
| G6B-2114P-US<br>G6B-2114C-US<br>G6B-2214P-US<br>G6B-2214C-US<br>G6B-2014P-US<br>G6B-2014C-US     | SPST-NO + SPST-NC<br>DPST-NO<br>DPST-NC |              | 5 A, 250 VAC (general use)<br>5 A, 30 VDC (resistive load) |


Engineering Data

G6B-1114P-US


Maximum Switching Power

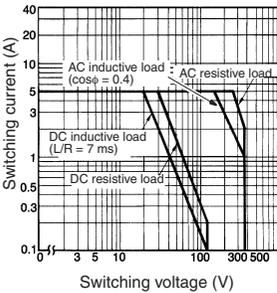

Endurance

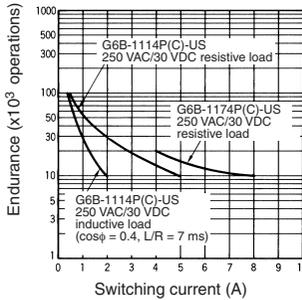

Ambient Temperature vs. Maximum Coil Voltage

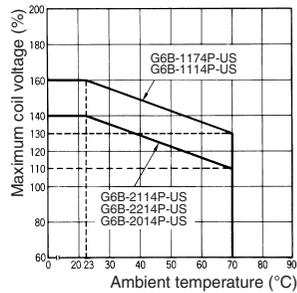


**Note:** The maximum coil voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.


G6B-2114P-US, G6B-2214P-US

G6B-2014P-US

Maximum Switching Power

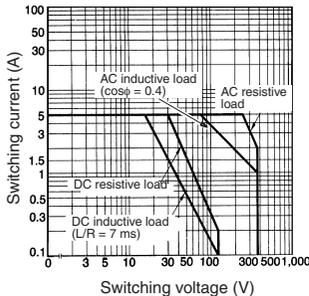

Endurance

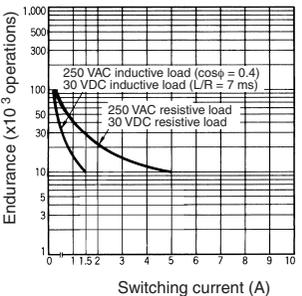


# Dimensions


Note: 1. All units are in millimeters unless otherwise indicated.

2. Orientation marks are indicated as follows:  


## G6B-1114P-US G6BU-1114P-US

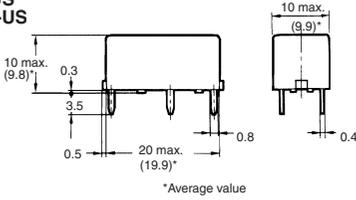


Terminal Arrangement/Internal Connections (Bottom View)  
G6B-1114P, -1114C




Mounting Holes (Bottom View)  
G6B-1114P, -1114C  
G6BU-1114P, -1114C




## G6B-1114C-US G6BU-1114C-US

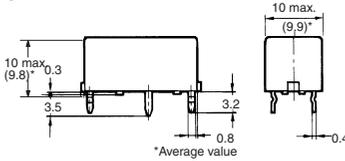


G6BU-1114P, -1114C




## G6BK-1114P-US

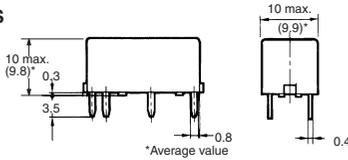


Terminal Arrangement/Internal Connections (Bottom View)  
G6BK-1114P, -1114C




Mounting Holes (Bottom View)  
G6BK-1114P, -1114C




## G6BK-1114C-US

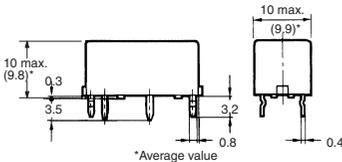


## G6B-1174P-US

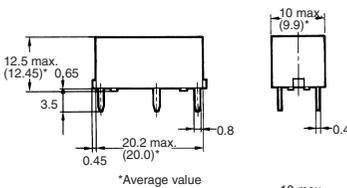


Terminal Arrangement/Internal Connections (Bottom View)  
G6B-1174P, -1174C





Mounting Holes (Bottom View)



## G6B-1174C-US

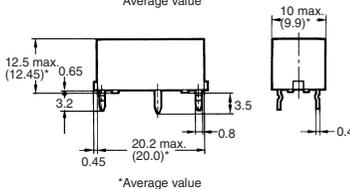


G6B-2114P-US  
G6B-2214P-US  
G6B-2014P-US

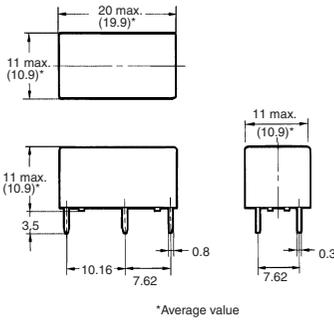


Terminal Arrangement/Internal Connections (Bottom View)


G6B-2114P-US




G6B-2214P-US




G6B-2014P-US



Mounting Holes (Bottom View)  
Tolerance:  $\pm 0.1$




G6B-2114C-US  
G6B-2214C-US  
G6B-2014C-US

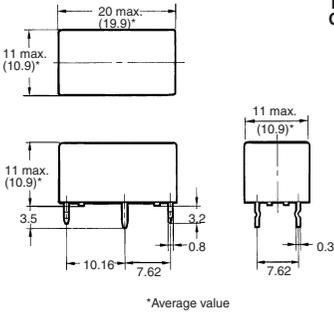


Terminal Arrangement/Internal Connections (Bottom View)


G6B-2114C-US




G6B-2214C-US





G6B-2014C-US




Mounting Holes (Bottom View)  
Tolerance:  $\pm 0.1$





Back Connecting Socket  
P6B-04P

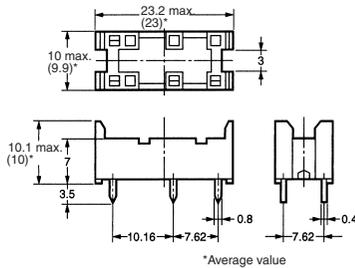



Mounting Holes (Bottom View)

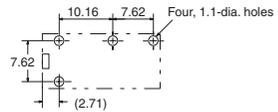

**P6B-06P**





**Mounting Holes (Bottom View)**

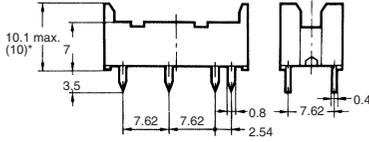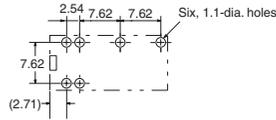


\*Average value


**P6B-26P**



**Mounting Holes (Bottom View)**




**Mounting Height of Relay with Connecting Socket**




**Note:** Rated current of socket is 5 A max.

**Note:** Height of G6B-1174P-US is 19.5 mm max.

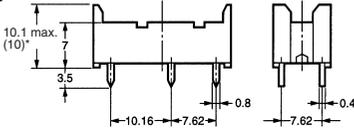

\*Average value

**Removal Tool  
P6B-Y1**



**Hold-down Clips  
P6B-C2**



**Note:** P6B-C2 Hold-down Clips cannot be used for G6B-1174P-US.

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.