



# RO2188A


## 390.0 MHz SAW Resonator

- **Ideal for 390.0 MHz Transmitters**
- **Very Low Series Resistance**
- **Quartz Stability**
- **Rugged, Hermetic, Surface Mount SM-2 Package**
- **Complies with Directive 2002/95/EC (RoHS)**

The RO2188 is a true one-port, surface-acoustic-wave (SAW) resonator in SM-2 case. It provides reliable, fundamental-mode, quartz frequency stabilization of fixed-frequency transmitters operating at 390.0 MHz.

### Absolute Maximum Ratings

Rating	Value	Units
CW RF Power Dissipation	+5	dBm
DC Voltage Between Any Two Pins (Observe ESD Precautions)	±30	VDC
Case Temperature	-40 to +85	°C
Soldering Temperature (10 seconds / 5 cycles max.)	260	°C

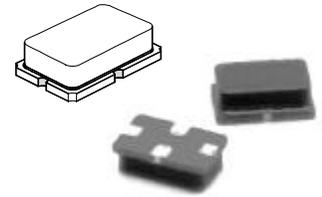

SM-2 Case

### Electrical Characteristics

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units	
Center Frequency at +25 °C	Absolute Frequency	f <sub>C</sub>	389.900		390.100	MHz	
	Tolerance from 304.0 MHz						Δf <sub>C</sub>
Insertion Loss	IL	2, 5, 6		0.9	2.0	dB	
Quality Factor	Unloaded Q	Q <sub>U</sub>		12,000			
	50 Ω Loaded Q						Q <sub>L</sub>
Temperature Stability	Turnover Temperature	T <sub>O</sub>	27	42	57	°C	
	Turnover Frequency	f <sub>O</sub>	6, 7, 8	f <sub>C</sub> -5		kHz	
	Frequency Temperature Coefficient	FTC		0.037		ppm/°C <sup>2</sup>	
Frequency Aging	Absolute Value during the First Year	fA	1	≤10		ppm/yr	
DC Insulation Resistance between Any Two Terminals		5	1.0			MΩ	
RF Equivalent RLC Model	Motional Resistance	R <sub>M</sub>	5, 7, 9	11	26	Ω	
	Motional Inductance	L <sub>M</sub>		54.963		μH	
	Motional Capacitance	C <sub>M</sub>		3.0299		fF	
	Pin 1 to Pin 2 Static Capacitance	C <sub>O</sub>		5, 6, 9	3.6	3.9	4.2
	Transducer Static Capacitance	C <sub>P</sub>	5, 6, 7, 9		3.65		pF
Test Fixture Shunt Inductance	L <sub>TEST</sub>	2, 7		43		nH	
Lid Symbolization	E319						




**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**

#### Notes:


- Lifetime (10 year) frequency aging.
- The center frequency, f<sub>C</sub>, is measured at the minimum insertion loss point, IL<sub>MIN</sub>, with the resonator in the 50 Ω test system (VSWR ≤ 1.2:1). The shunt inductance, L<sub>TEST</sub>, is tuned for parallel resonance with C<sub>O</sub> at f<sub>C</sub>.
- One or more of the following United States patents apply: 4,454,488 and 4,616,197.
- Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
- Unless noted otherwise, case temperature T<sub>C</sub> = +25°C±2°C.
- The design, manufacturing process, and specifications of this device are subject to change without notice.
- Derived mathematically from one or more of the following directly measured parameters: f<sub>C</sub>, IL, 3 dB bandwidth, f<sub>C</sub> versus T<sub>C</sub>, and C<sub>O</sub>.
- Turnover temperature, T<sub>O</sub>, is the temperature of maximum (or turnover) frequency, f<sub>O</sub>. The nominal frequency at any case temperature, T<sub>C</sub>, may be calculated from:  $f = f_O [1 - FTC (T_O - T_C)^2]$ .
- This equivalent RLC model approximates resonator performance near the resonant frequency and is provided for reference only. The capacitance C<sub>O</sub> is the static (nonmotional) capacitance between the two terminals measured at low frequency (10 MHz) with a capacitance meter. The measurement includes parasitic capacitance with a floating case. Case parasitic capacitance is approximately 0.25pF. Transducer parallel capacitance can be calculated as:  $C_P \approx C_O - 0.25pF$ .

## Electrical Connections

The SAW resonator is bidirectional and may be installed with either orientation. The two terminals are interchangeable and unnumbered. The callout NC indicates no internal connection. The NC pads assist with mechanical positioning and stability. External grounding of the NC pads is recommended to help reduce parasitic capacitance in the circuit.




## Equivalent LC Model

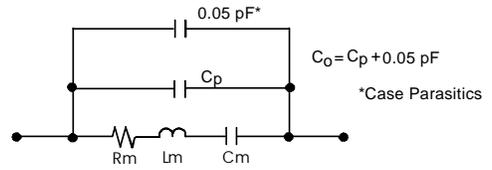


## Typical Test Circuit

The test circuit inductor,  $L_{TEST}$ , is tuned to resonate with the static capacitance,  $C_0$ , at  $F_C$ .

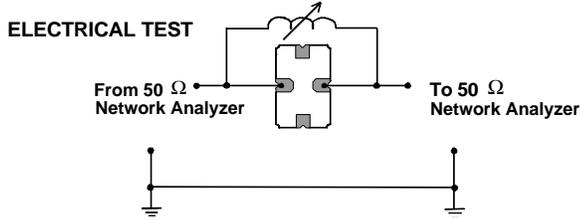


## POWER TEST

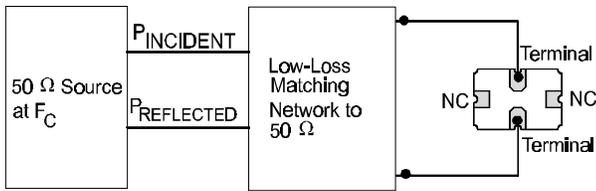


$$\text{CW RF Power Dissipation} = P_{INCIDENT} - P_{REFLECTED}$$

## Typical Application Circuits

### Typical Low-Power Transmitter Application

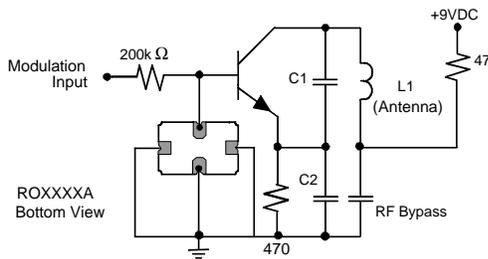


### Typical Local Oscillator Application

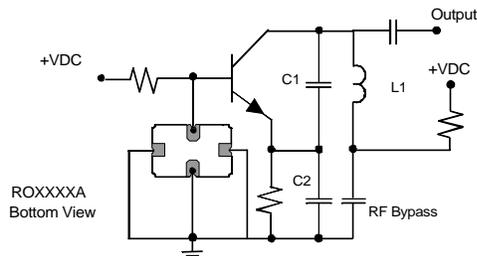


## Temperature Characteristics

The curve shown on the right accounts for resonator contribution only and does not include LC component temperature contributions.

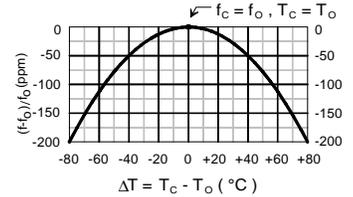


## Typical Circuit Board Land Pattern

The circuit board land pattern shown below is one possible design. The optimum land pattern is dependent on the circuit board assembly process which varies by manufacturer. The distance between adjacent land edges should be at a maximum to minimize parasitic capacitance. Trace lengths from terminal lands to other components should be short and wide to minimize parasitic series inductances.

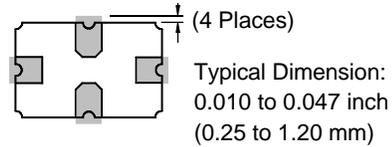

## Case Design

The case material is black alumina with contrasting symbolization. All pads are nominally centered with respect to the base and consist of 40 to 70 microinches electroless gold on 60-350 microrinches electroless nickel.

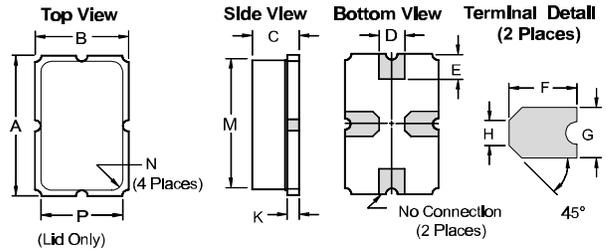

Dimensions	Millimeters		Inches	
	Min	Max	Min	Max
A		5.97		0.235
B		3.94		0.155
C		2.16		0.085
D	0.94	1.10	0.037	0.043
E	0.83	1.20	0.033	0.047
F	1.16	1.53	0.046	0.060
G	0.94	1.10	0.037	0.043
H	0.43	0.59	0.017	0.023
K	0.43	0.59	0.017	0.023
M		5.31		0.209
N	0.38	0.64	0.015	0.025
P		3.28		0.129