


### FEATURES

- 6 (X) + 6 (Y) Cross Plate Anode
- High Spatial Resolution
- Wide Effective Area

### APPLICATIONS

- Animal PET (Positron Emission Tomography)
- Compact Gamma Camera
- Scintillation Mammography

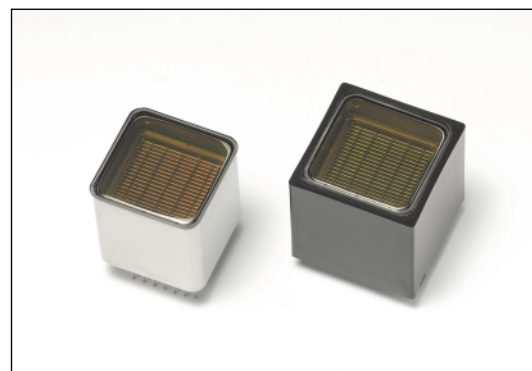

Left: R8900-00-C12, Right: R8900U-00-C12

### GENERAL

Parameter		Description / Value	Unit
Spectral Response		300 to 650	nm
Wavelength of Maximum Response		420	nm
Photocathode	Material	Bialkali	—
	Minimum Effective Area	23.5 × 23.5	mm
Window	Material	Borosilicate glass	—
	Thickness	0.8	mm
Dynode	Structure	Metal channel dynode	—
	Number of Stages	11	—
Anode		6 (X) + 6 (Y) Cross plate anode	—
Weight		Approx. 28 (U Type: Approx. 38)	g
Suitable Socket		E678-32B (sold separately)	—
Operating Ambient Temperature		-80 to +50 (U Type: -30 to +50)	°C
Storage Temperature		-80 to +50 (U Type: -30 to +50)	°C

### MAXIMUM RATINGS (Absolute Maximum Values)

Parameter		Value	Unit
Supply Voltage	Between Anode and Cathode	1000	V
Average Anode Current in Total		0.1	mA

### CHARACTERISTICS (at 25 °C)

Parameter		Min.	Typ.	Max.	Unit
Cathode Sensitivity	Luminous (2856 K)	50	85	—	μA/lm
	Quantum Efficiency at 420 nm	—	25	—	%
	Blue Sensitivity Index (CS 5-58)	7.5	10	—	—
Anode Sensitivity	Luminous (2856 K)	15	60	—	A/lm
Gain		—	0.7 × 10 <sup>6</sup>	—	—
Anode Dark Current in Total of Anodes (after 30 min storage in darkness)		—	2	10	nA
Time Response	Anode Pulse Rise Time	—	2.2	—	ns
	Electron Transit Time	—	11.9	—	ns
	Transit Time Spread (FWHM)	—	0.75	—	ns

**NOTE:** Anode characteristics are measured with the voltage distribution ratio shown below.

### VOLTAGE DISTRIBUTION RATIO AND SUPPLY VOLTAGE

Electrodes	K	G	Dy1	Dy2	Dy3	Dy4	Dy5	Dy6	Dy7	Dy8	Dy9	Dy10	Dy11	P
Ratio	0.5	1.5	2	1	1	1	1	1	1	1	1	1	1	0.5

Supply Voltage: 800 V, K: Cathode, G: Grid, Dy: Dynode, P: Anode

# POSITION SENSITIVE PHOTOMULTIPLIER TUBES

## R8900-00-C12, R8900U-00-C12

Figure 1: Typical Spectral Response

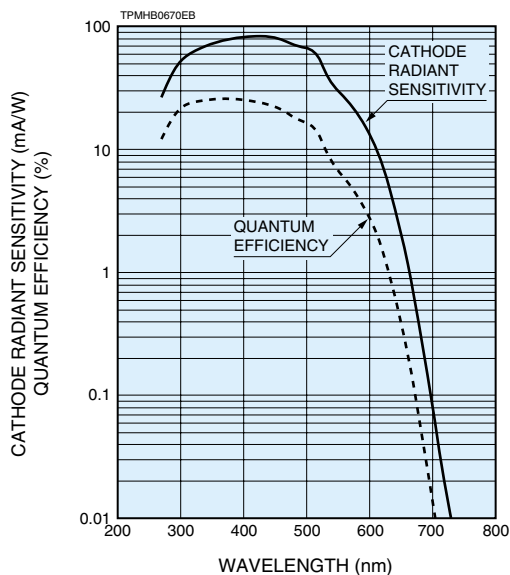


Figure 2: Typical Gain and Anode Dark Current

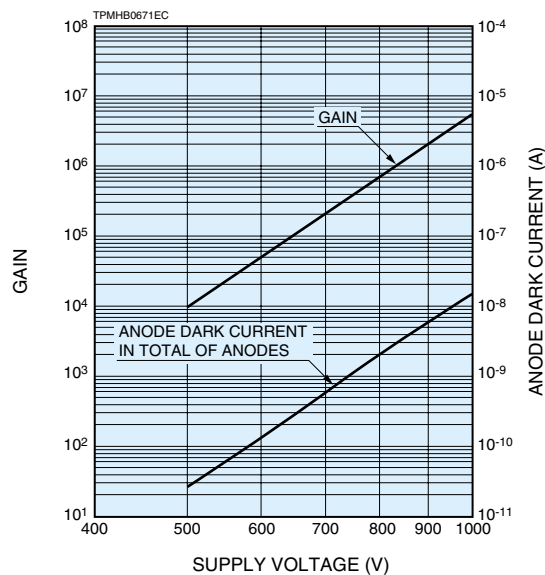


Figure 3: Spatial Resolution

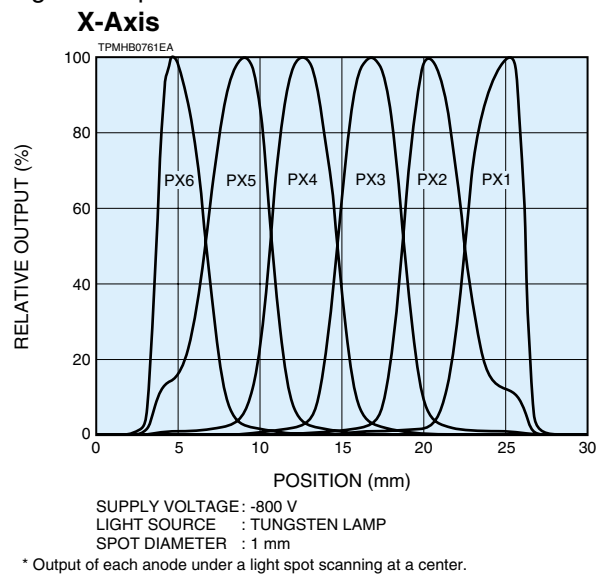


Figure 4: Position Response Using PX/PY Anodes



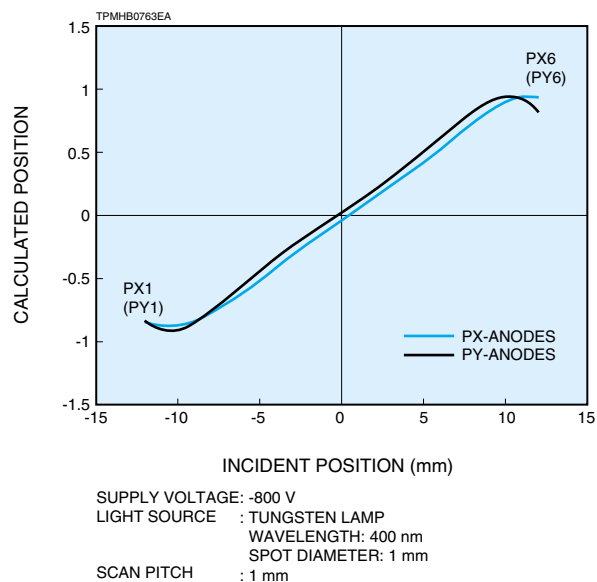



Figure 5: Positioning Histogram Example

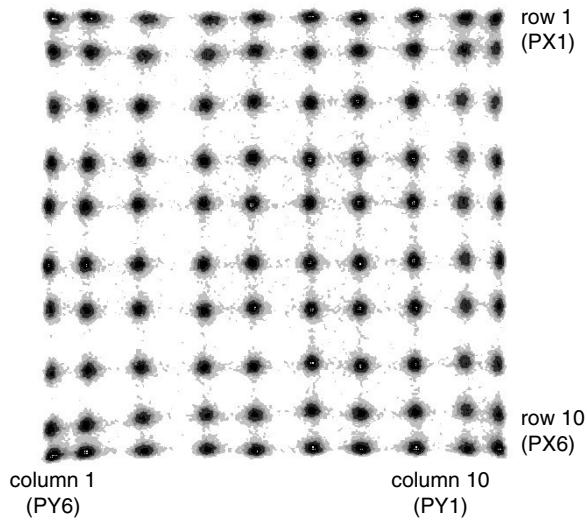

Positioning histogram of a 10 × 10 array of 2 mm × 2 mm × 20 mm BGO elements for 511 keV  $\gamma$ -rays.


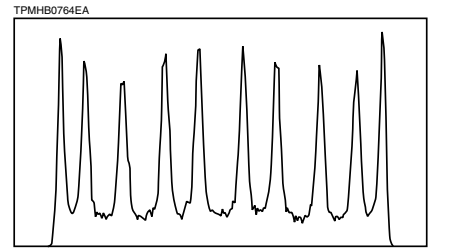


Positioning histogram profile for row 5 (left: column 1)

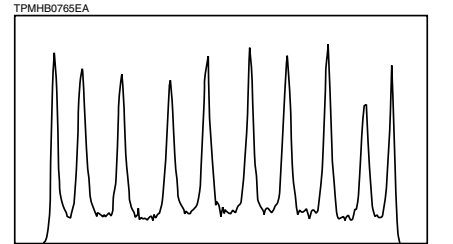


Positioning histogram profile for column 5 (left: row 10)

Figure 6: R8900-00-C12 Dimensional Outline and Basing Diagram (Unit: mm)

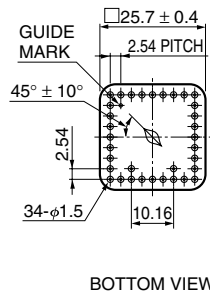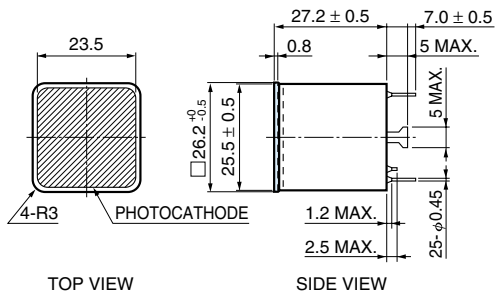



K: Photocathode  
 Dy: Dynode (Dy1-Dy11)  
 P: Anode (PX1-PX6) (PY1-PY6)  
 G: Grid  
 IC: Internal Connection (Do not use)

### Basing Diagram

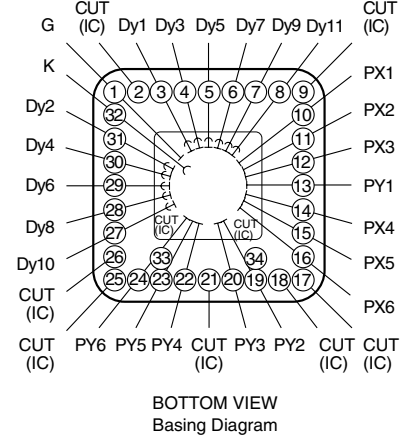


TPMHA0523EA

Figure 7: R8900U-00-C12 Dimensional Outline and Basing Diagram (Unit: mm)  
 (R8900-00-C12 with an Insulation Cover)

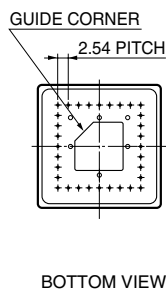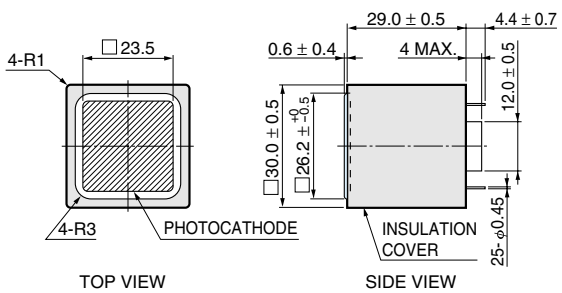

K: Photocathode  
 Dy: Dynode (Dy1-Dy11)  
 P: Anode (PX1-PX6) (PY1-PY6)  
 G: Grid

### Basing Diagram

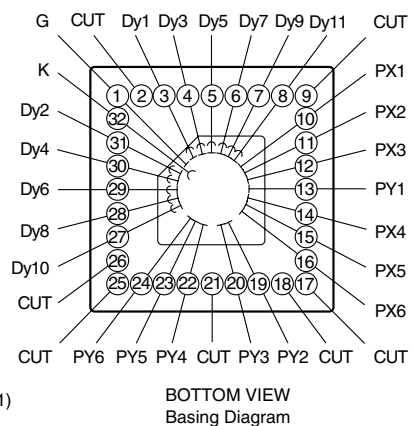


TPMHA0524EC

# POSITION SENSITIVE PHOTOMULTIPLIER TUBES


## R8900-00-C12, R8900U-00-C12

[ACCESSORIES] (Unit: mm)

● Socket E678-32B **SOLD SEPARATELY**

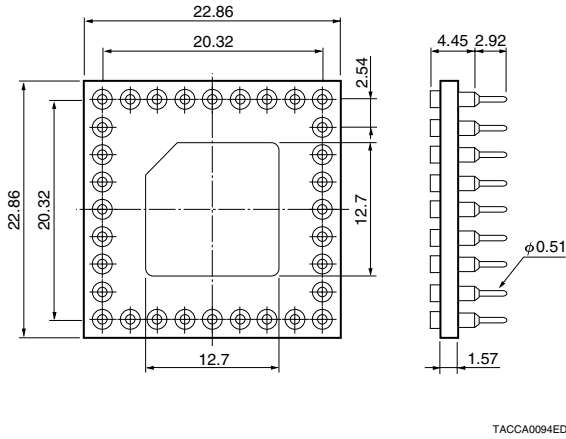

● D Type Socket Assembly E7514 **SOLD SEPARATELY**

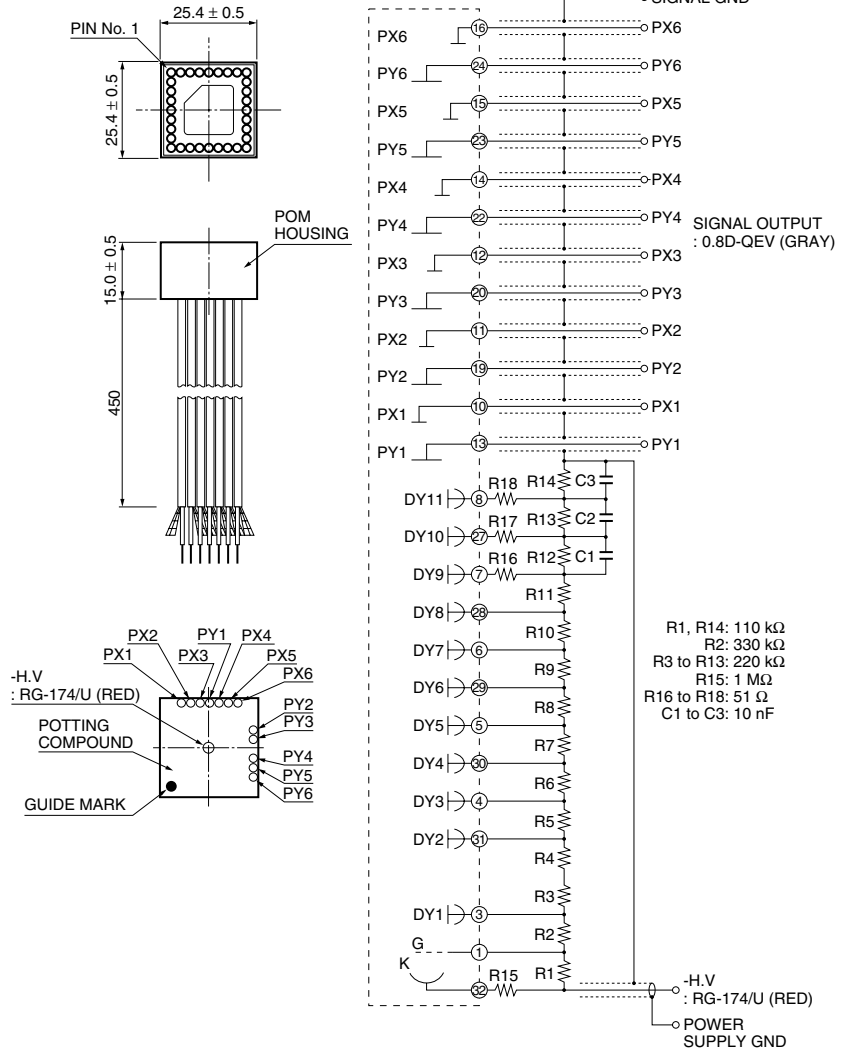

In case of using PMT with E7514, PMT must be operated within 0 °C to 50 °C  
(Storage temperature for E7514 only: -15 °C to +60 °C)

TACCA0236EB

**⚠ WARNING ~ High Voltage ~**

The product is operated at high voltage potential. Further, the metal housing of the product is connected to the photocathode (potential) so that it becomes a high voltage potential when the product is operated at a negative high voltage (anode grounded). Accordingly, extreme safety care must be taken for the electrical shock hazard to the operator or the damage to the other instruments.

\* PATENT: USA: 5410211 and other(9), GBR: 551767 and other(9), DEU: 69209809 and other(9), FRA: 551767 and other(9), JPN: 3078905 and other(9)

# HAMAMATSU

WEB SITE [www.hamamatsu.com](http://www.hamamatsu.com)

HAMAMATSU PHOTONICS K.K., Electron Tube Division

314-5, Shimokanzo, Iwata City, Shizuoka Pref., 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P. O. Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: [usa@hamamatsu.com](mailto:usa@hamamatsu.com)

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658 E-mail: [info@hamamatsu.de](mailto:info@hamamatsu.de)

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: [infos@hamamatsu.fr](mailto:infos@hamamatsu.fr)

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road Welwyn Garden City Hertfordshire AL7 1BW, United Kingdom, Telephone: 44-(0)1707-294888, Fax: 44(0)1707-325777 E-mail: [info@hamamatsu.co.uk](mailto:info@hamamatsu.co.uk)

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171-41 SOLNA, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01 E-mail: [info@hamamatsu.se](mailto:info@hamamatsu.se)

Italy: Hamamatsu Photonics Italia: S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741 E-mail: [info@hamamatsu.it](mailto:info@hamamatsu.it)

TPMH1299E01  
OCT. 2006 IP