

M3T-FLX-100NRB

Converter for Connecting 100-core Flexible Board FLX100 to 100-pin 0.65mm-pitch QFP

Function

The M3T-FLX-100NRB is a converter for connecting the FLX100 100-core flexible board to a foot pattern of a 100-pin 0.65mm-pitch QFP (100P6S-A). This converter can be used during debugging and board-mounted evaluation in common.


Attaching Procedure

When debugging


- (1) Mount the NQPACK100RB.
- (2) Attach the YQPACK100RB on the NQPACK100RB.
- (3) Secure the four corners of the YQPACK100RB by the included YQ-GUIDE's.
- (4) Attach the M3T-FLX-100NRB to the YQPACK100RB.
- (5) Attach the probe of the emulation pod to the M3T-FLX-100NRB.

During board-mounted evaluation


On top of NQPACK100RB that is mounted on the target system, attach the MCU with on-chip flash memory or one-time PROM and the HQPACK100RB168 (option) in that order.

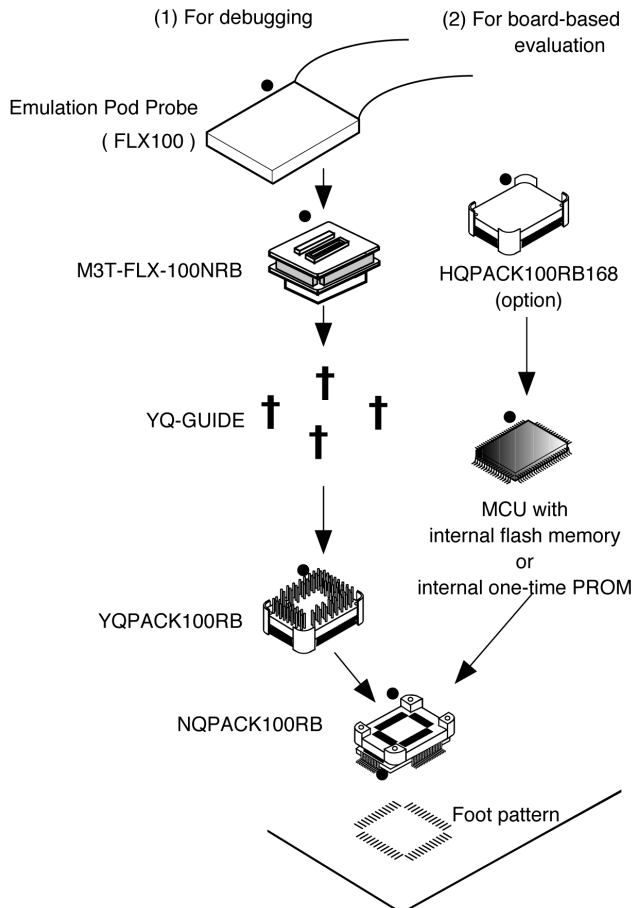

External View and Dimensions

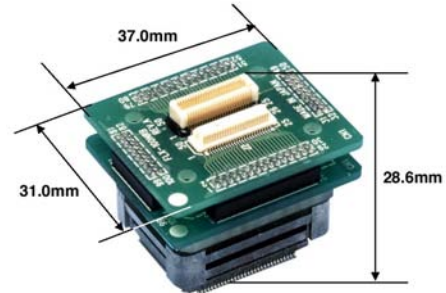

《Side View》

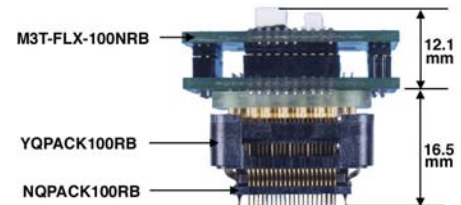

Package Components

- M3T-FLX-100NRB converter
- YQPACK100RB (made by Tokyo Eletech Co., Ltd.)
- NQPACK100RB (made by Tokyo Eletech Co., Ltd.)
- YQ-GUIDE (× 4)
- User's manual

*Required components to connect to the target system are included with this product package. Each component made by Tokyo Eletech Co., Ltd. is optionally available alone from Tokyo Eletech Co., Ltd. See Appendix G "Contact Addresses for Partner Products".

Foot Pattern Reference Dimensions

See Appendix E "List of TQPACK/NQPACK Foot Patterns Made by Tokyo Eletech Co., Ltd."

[Ordering Information] See Appendix H "Ordering Information".