

AIMB-562 KIOSK

LGA 775 Core™ 2 Duo
MicroATX with Dual VGA/
LVDS, 10 COM, and LAN

NEW



CE FCC

Features


- Intel® 945G/945GC chipset supports 533/800/1066 MHz FSB
- Dual channel DDR2 533/667 SDRAM up to 4 GB
- Supports dual VGA and 24-bit LVDS panel, dual channel 3 W amplifier
- Supports 10 serial ports, 8 USB, 16-bit GPIO, TPM 1.2 (optional)
- Supports Embedded Software API and Utility



Specifications

| | | | | | |
|--------------------------|-------------------------|---|-------------------------|---------------------------|---------------|
| Processor System | CPU (65 nm/90 nm) | Intel Core 2 Duo | Intel Pentium Dual-Core | Intel Pentium 4 | Intel Celeron |
| | Max. Speed | E7400 2.8 GHz | E2200 2.2 GHz | 651 3.4 GHz | 440 2.0 GHz |
| | L2 Cache | 4 MB | 1 MB | 2 MB | 512 KB |
| | Chipset | Intel 945G/945GC + ICH7 | | | |
| | BIOS | Award 16 Mbit, SPI | | | |
| | Front Side Bus | 533/800/1066 MHz | | | |
| Expansion Slot | PCIe x16 | - | | | |
| | PCIe x1 | 250 MB per direction, 1 slot | | | |
| | PCI | 32-bit/33 MHz, 2 slots | | | |
| Memory | Technology | Dual channel DDR2 533/667 MHz | | | |
| | Max. Capacity | 4 GB | | | |
| | Socket | 2 x 240-pin DIMM | | | |
| Graphics | Embedded | Intel GMA 950 sharing 224 MB system memory | | | |
| | LVDS | Supports single channel 24-bit/dual channel 48-bit LVDS, via Chronitel 7308B SDVO transmitter | | | |
| | 2nd VGA | Supports 2nd CRT, via Chronitel 7317 SDVO transmitter | | | |
| | Dual Display | CRT + LVDS, CRT + CRT | | | |
| Ethernet | Interface | 10/100/1000 Mbps | | | |
| | Controller | GbE LAN: Realtek 8111C | | | |
| | Connector | RJ-45 x 1 | | | |
| SATA II | Max. Data Transfer Rate | 300 MB/s | | | |
| | Channel | 2 | | | |
| EIDE | Mode | ATA 100/66/33 | | | |
| | Channel | 1 (max. 2 devices) | | | |
| I/O Interface | VGA | 2 | | | |
| | USB | 8 | | | |
| | Audio | 2 (Line-out, Mic-in) | | | |
| | Serial | 10 (8 of RS-232; 2 of RS-232/422/485 support auto flow control) | | | |
| | Parallel | 1 (SPP/EPP/ECP) | | | |
| | FDD | - | | | |
| | PS/2 | 2 (1 x keyboard and 1 x mouse) | | | |
| | GPIO | 16-bit GPIO | | | |
| Watchdog Timer | Output | System reset | | | |
| | Interval | Programmable 1 ~ 255 sec/min | | | |
| Power Requirement | Power On | Intel Core 2 Duo E4300 1.8 GHz FSB 800 MHz, 1 GB DDR2 667 SDRAM | | | |
| | | 3.3 V | 5 V | 12 V | 5 Vsb -12 V |
| | | 1.02 A | 4 A | 2.35 A | 0.26 A 0.12 A |
| Environment | | Operating | | Non-Operating | |
| | Temperature | 0 ~ 60° C (32 ~ 140° F), depends on CPU speed and cooler solution | | -20 ~ 70° C (-4 ~ 158° F) | |
| Physical Characteristics | Dimensions (W x D) | 244 x 244 mm (9.6" x 9.6") | | | |

Board Diagram

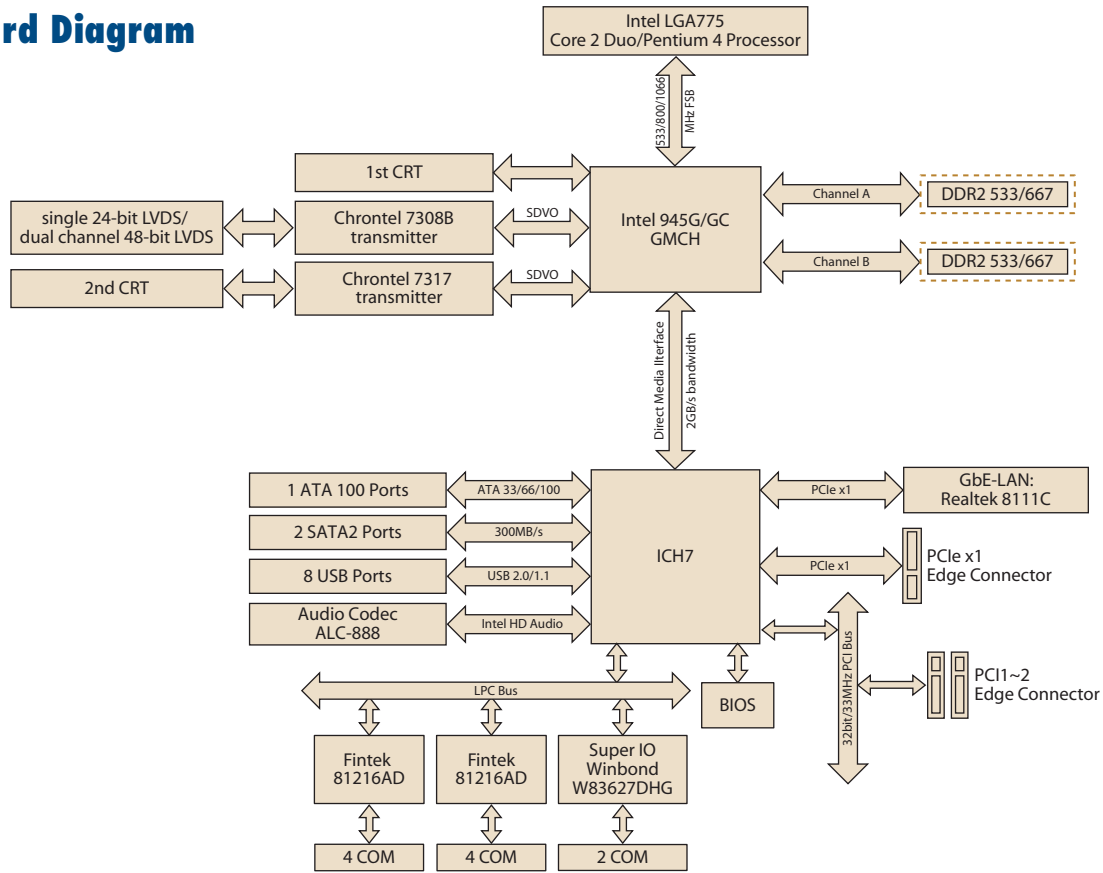

Ordering Information

| Part Number | Chipset | Display | COM | GbE LAN |
|------------------|---------|------------|-----|---------|
| AIMB-562VG-KSA1E | 945G | 2 CRT/LVDS | 10 | 1 |
| AIMB-562VG-GRA1E | 945G | 2 CRT | 10 | 1 |
| AIMB-562L-KSA1E | 945GC | 1 CRT | 10 | 1 |

Riser Card

| Part Number | Description |
|------------------|-----------------------------------|
| AIMB-R430P-03A2E | 2U riser card for 3 PCI expansion |

Bracket View



AIMB-562VG-KSA1E
AIMB-562VG-GRA1E

Packing List

| Description | Quantity |
|----------------------------|----------|
| IDE HDD cable | x 1 |
| Serial ATA HDD data cable | x 2 |
| Serial ATA HDD power cable | x 2 |
| COM port cable kit | x 4 |
| I/O port bracket | x 1 |
| Startup manual | x 1 |
| Utility CD | x 1 |

Accessories

| Part Number | Description |
|----------------|------------------------------------|
| 1750000334 | LGA775 CPU cooler (115 W) |
| 1960022033T000 | LGA775 CPU cooler for 2U chassis |
| 1700002314 | USB cable with four ports, 30.5 cm |
| 1700002204 | USB cable with dual ports, 27 cm |
| 1700003195 | USB cable with dual ports, 17.5 cm |

Value-Added Software Services

Software API: An interface that defines the ways by which an application program may request services from libraries and/or operating systems. Provides not only the underlying drivers required but also a rich set of user-friendly, intelligent and integrated interfaces, which speeds development, enhances security and offers add-on value for Advantech platforms. It plays the role of catalyst between developer and solution, and makes Advantech embedded platforms easier and simpler to adopt and operate with customer applications.

Software API

Control



GPIO

General Purpose Input/Output is a flexible parallel interface that allows a variety of custom connections. allows users to monitor the level of signal input or set the output status to switch on/off the device. Our API also provide Programmable GPIO, allows developers to dynamically set the GPIO input or output status



SMBus

SMBus is the System Management Bus defined by Intel® Corporation in 1995. It is used in personal computers and servers for low-speed system management communications. The SMBus API allows a developer to interface a embedded system environment and transfer serial messages using the SMBus protocols, allowing multiple simultaneous device control.



I2C

I2C is a bi-directional two wire bus that was developed by Philips for use in their televisions in the 1980s. The I2C API allows a developer to interface a embedded system environment and transfer serial messages using the I2C protocols, allowing multiple simultaneous device control.

Display



Brightness Control

The Brightness Control API allows a developer to interface Embedded device to easily control brightness.



Backlight

The Backlight API allows a developer to control the backlight (screen) on/off in Embedded Device.

Monitor



Watchdog

A watchdog timer (WDT) is a device that performs a specific operation after a certain period of time if something goes wrong and the system does not recover on its own. A watchdog timer can be programmed to perform a warm boot (restarting the system) after a certain number of seconds.



Hardware Monitor

The Hardware Monitor (HWM) API is a system health supervision API that inspects certain condition indexes, such as fan speed, temperature and voltage.



Hardware Control

The Hardware Control API allows developers to set the PWM (Pulse Width Modulation) value to adjust Fan Speed or other devices; can also be used to adjust the LCD brightness.

Power Saving



CPU Speed


Make use of Intel SpeedStep technology to save the power consumption. The system will automatically adjust the CPU Speed depend on the system loading.



System Throttling

Refers to a series of methods for reducing power consumption in computers by lowering the clock frequency. These API allow user to lower the clock from 87.5% to 12.5%.

Software Utility



BIOS Flash

The BIOS Flash utility allows customers to update the flash ROM BIOS version, or use it to back up current BIOS by copying it from the flash chip to a file on customers' disk. The BIOS Flash utility also provides a command line version and API for fast implementation into customized applications.



Embedded Security ID

The embedded application is the most important property of a system integrator. It contains valuable intellectual property, design knowledge and innovation, but it is easy to be copied! Embedded Security ID utility which provides reliable security functions for customers to secure their application data within embedded BIOS.



Monitoring

The Monitoring is a utility for customer to monitor the system health, like Voltage, CPU and System temperature and FAN speed. These items are important to a device, if the critical errors happen and not be solved immediately, a permanent damage may be caused.



eSOS

The eSOS is a small OS stored in BIOS ROM. It will boot up in case of main OS crash. It will diagnose the hardware status, and then send an e-mail to administrator. The eSOS also provide Remote Connection: Telnet server and FTP server for administrator to rescue the system.



Flash Lock

Flash Lock is a mechanism to bind the Board and CF card (SQFlash) together. User can "Lock" SQFlash via Flash Lock function and "Unlock" by BIOS while booting. A locked SQFlash cannot be read by any card reader or boot from other platforms without a BIOS with "Unlock" feature.