



PD - 91852E

RADIATION HARDENED POWER MOSFET SURFACE MOUNT (SMD-2)

IRHNA57064
60V, N-CHANNEL
R5™ TECHNOLOGY

Product Summary

Part Number	Radiation Level	R _{Ds(on)}	I _D
IRHNA57064	100K Rads (Si)	0.0056Ω	75*A
IRHNA53064	300K Rads (Si)	0.0056Ω	75*A
IRHNA54064	600K Rads (Si)	0.0056Ω	75*A
IRHNA58064	1000K Rads (Si)	0.0065Ω	75*A



International Rectifier's R5™ technology provides high performance power MOSFETs for space applications. These devices have been characterized for Single Event Effects (SEE) with useful performance up to an LET of 80 (MeV/(mg/cm²)). The combination of low R_{Ds(on)} and low gate charge reduces the power losses in switching applications such as DC to DC converters and motor control. These devices retain all of the well established advantages of MOSFETs such as voltage control, fast switching, ease of paralleling and temperature stability of electrical parameters.

Features:

- Single Event Effect (SEE) Hardened
- Ultra Low R_{Ds(on)}
- Low Total Gate Charge
- Proton Tolerant
- Simple Drive Requirements
- Ease of Parallelizing
- Hermetically Sealed
- Surface Mount
- Ceramic Package
- Light Weight

Absolute Maximum Ratings

Pre-Irradiation

	Parameter		Units
I _D @ V _{GS} = 12V, T _C = 25°C	Continuous Drain Current	75*	A
I _D @ V _{GS} = 12V, T _C = 100°C	Continuous Drain Current	75*	
I _{DM}	Pulsed Drain Current ①	300	
P _D @ T _C = 25°C	Max. Power Dissipation	300	W
	Linear Derating Factor	2.4	W/C
V _{GS}	Gate-to-Source Voltage	±20	V
EAS	Single Pulse Avalanche Energy ②	863	mJ
I _{AR}	Avalanche Current ①	75	A
E _{AR}	Repetitive Avalanche Energy ①	30	mJ
dV/dt	Peak Diode Recovery dV/dt ③	4.4	V/ns
T _J	Operating Junction	-55 to 150	°C
T _{STG}	Storage Temperature Range		
	Pckg. Mounting Surface Temp.	300 (for 5s)	
	Weight	3.3 (Typical)	g

* Current is limited by internal wire diameter

For footnotes refer to the last page

Electrical Characteristics @ $T_j = 25^\circ\text{C}$ (Unless Otherwise Specified)

	Parameter	Min	Typ	Max	Units	Test Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	60	—	—	V	$\text{V}_{\text{GS}} = 0\text{V}, \text{I}_D = 1.0\text{mA}$
$\Delta \text{BV}_{\text{DSS}}/\Delta T_j$	Temperature Coefficient of Breakdown Voltage	—	0.065	—	$\text{V}/^\circ\text{C}$	Reference to 25°C , $\text{I}_D = 1.0\text{mA}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source On-State Resistance	—	—	0.0056	Ω	$\text{V}_{\text{GS}} = 12\text{V}, \text{I}_D = 75\text{A}$ ④
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	2.0	—	4.0	V	$\text{V}_{\text{DS}} = \text{V}_{\text{GS}}, \text{I}_D = 1.0\text{mA}$
g_{fs}	Forward Transconductance	45	—	—	S (mS)	$\text{V}_{\text{DS}} > 15\text{V}, \text{I}_{\text{DS}} = 75\text{A}$ ④
I_{DSS}	Zero Gate Voltage Drain Current	—	—	10	μA	$\text{V}_{\text{DS}} = 48\text{V}, \text{V}_{\text{GS}} = 0\text{V}$
		—	—	25		$\text{V}_{\text{DS}} = 48\text{V}, \text{V}_{\text{GS}} = 0\text{V}, T_j = 125^\circ\text{C}$
I_{GSS}	Gate-to-Source Leakage Forward	—	—	100	nA	$\text{V}_{\text{GS}} = 20\text{V}$
I_{GSS}	Gate-to-Source Leakage Reverse	—	—	-100		$\text{V}_{\text{GS}} = -20\text{V}$
Q_g	Total Gate Charge	—	—	160	nC	$\text{V}_{\text{GS}} = 12\text{V}, \text{I}_D = 35\text{A}$
Q_{gs}	Gate-to-Source Charge	—	—	55		$\text{V}_{\text{DS}} = 30\text{V}$
Q_{gd}	Gate-to-Drain ('Miller') Charge	—	—	65		
$t_{\text{d(on)}}$	Turn-On Delay Time	—	—	35	ns	$\text{V}_{\text{DD}} = 30\text{V}, \text{I}_D = 35\text{A}, \text{V}_{\text{GS}} = 12\text{V}, \text{R}_G = 2.35\Omega$
t_r	Rise Time	—	—	125		
$t_{\text{d(off)}}$	Turn-Off Delay Time	—	—	75		
t_f	Fall Time	—	—	50		
$L_S + L_D$	Total Inductance	—	4.0	—	nH	Measured from the center of drain pad to center of source pad
C_{iss}	Input Capacitance	—	6080	—	pF	$\text{V}_{\text{GS}} = 0\text{V}, \text{V}_{\text{DS}} = 25\text{V}$ $f = 1.0\text{MHz}$
C_{oss}	Output Capacitance	—	2310	—		
C_{rss}	Reverse Transfer Capacitance	—	90	—		

Source-Drain Diode Ratings and Characteristics

	Parameter	Min	Typ	Max	Units	Test Conditions
I_S	Continuous Source Current (Body Diode)	—	—	75*	A	$T_j = 25^\circ\text{C}, I_S = 75\text{A}, \text{V}_{\text{GS}} = 0\text{V}$ ④
I_{SM}	Pulse Source Current (Body Diode) ①	—	—	300		
V_{SD}	Diode Forward Voltage	—	—	1.3	V	$T_j = 25^\circ\text{C}, I_F = 35\text{A}, \text{di/dt} \leq 100\text{A}/\mu\text{s}$
t_{rr}	Reverse Recovery Time	—	—	200	nS	$V_{\text{DD}} \leq 25\text{V}$ ④
Q_{RR}	Reverse Recovery Charge	—	—	538	nC	
t_{on}	Forward Turn-On Time	Intrinsic turn-on time is negligible. Turn-on speed is substantially controlled by $L_S + L_D$.				

Thermal Resistance

	Parameter	Min	Typ	Max	Units	Test Conditions
R_{thJC}	Junction-to-Case	—	—	0.42	$^\circ\text{C/W}$	
$R_{\text{thJ-PCB}}$	Junction-to-PC board	—	1.6	—		soldered to a 2" square copper-clad board

Note: Corresponding Spice and Saber models are available on the G&S Website.

For footnotes refer to the last page

Radiation Characteristics

IRHNA57064

International Rectifier Radiation Hardened MOSFETs are tested to verify their radiation hardness capability. The hardness assurance program at International Rectifier is comprised of two radiation environments. Every manufacturing lot is tested for total ionizing dose (per notes 5 and 6) using the TO-3 package. Both pre- and post-irradiation performance are tested and specified using the same drive circuitry and test conditions in order to provide a direct comparison.

Table 1. Electrical Characteristics @ $T_j = 25^\circ\text{C}$, Post Total Dose Irradiation^{⑤⑥}

	Parameter	Up to 600K Rads(Si) ¹				Units	Test Conditions
		Min	Max	Min	Max		
BV_{DSS}	Drain-to-Source Breakdown Voltage	60	—	60	—	V	$\text{V}_{\text{GS}} = 0\text{V}$, $\text{I}_D = 1.0\text{mA}$
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	2.0	4.0	1.5	4.0		$\text{V}_{\text{GS}} = \text{V}_{\text{DS}}$, $\text{I}_D = 1.0\text{mA}$
I_{GSS}	Gate-to-Source Leakage Forward	—	100	—	100	nA	$\text{V}_{\text{GS}} = 20\text{V}$
I_{GSS}	Gate-to-Source Leakage Reverse	—	-100	—	-100		$\text{V}_{\text{GS}} = -20\text{V}$
I_{DSS}	Zero Gate Voltage Drain Current	—	10	—	10	μA	$\text{V}_{\text{DS}}=48\text{V}$, $\text{V}_{\text{GS}}=0\text{V}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source ^④ On-State Resistance (TO-3)	—	0.0061	—	0.0071	Ω	$\text{V}_{\text{GS}} = 12\text{V}$, $\text{I}_D = 45\text{A}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source ^④ On-State Resistance (SMD-2)	—	0.0056	—	0.0065	Ω	$\text{V}_{\text{GS}} = 12\text{V}$, $\text{I}_D = 45\text{A}$
V_{SD}	Diode Forward Voltage ^④	—	1.3	—	1.3	V	$\text{V}_{\text{GS}} = 0\text{V}$, $\text{I}_S = 45\text{A}$

1. Part numbers IRHNA57064, IRHNA53064 and IRHNA54064

2. Part number IRHNA58064

International Rectifier radiation hardened MOSFETs have been characterized in heavy ion environment for Single Event Effects (SEE). Single Event Effects characterization is illustrated in Fig. a and Table 2.

Table 2. Single Event Effect Safe Operating Area

Ion	LET MeV/(mg/cm ²)	Energy (MeV)	Range (μm)	V_{DS} (V)				
				@ $\text{V}_{\text{GS}}=0\text{V}$	@ $\text{V}_{\text{GS}}=-5\text{V}$	@ $\text{V}_{\text{GS}}=-10\text{V}$	@ $\text{V}_{\text{GS}}=-15\text{V}$	@ $\text{V}_{\text{GS}}=-20\text{V}$
Kr	39.2	300	37.4	60	60	60	52	34
Xe	63.3	300	29.2	46	46	35	25	15
Au	86.6	2068	106	35	35	27	20	14

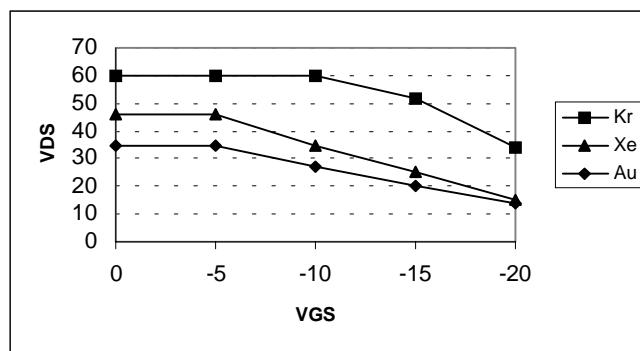
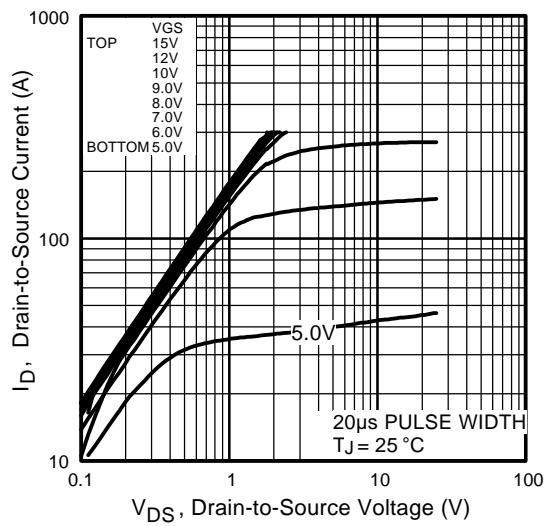
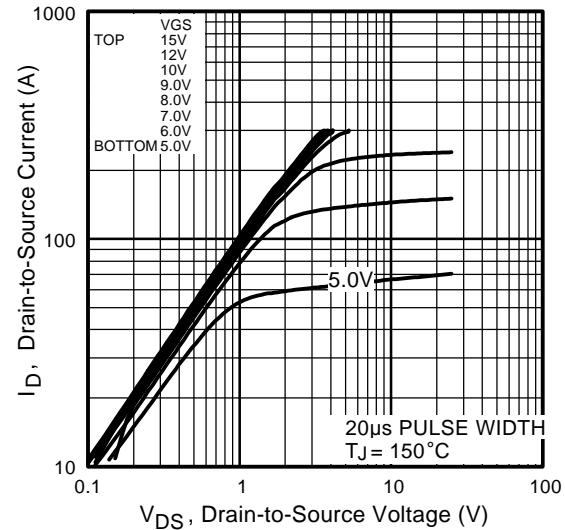
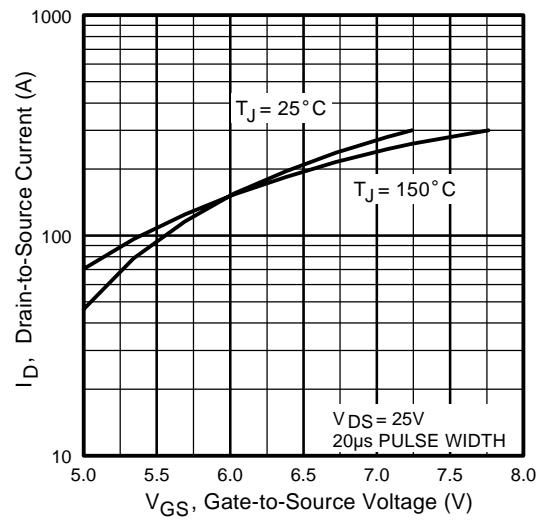
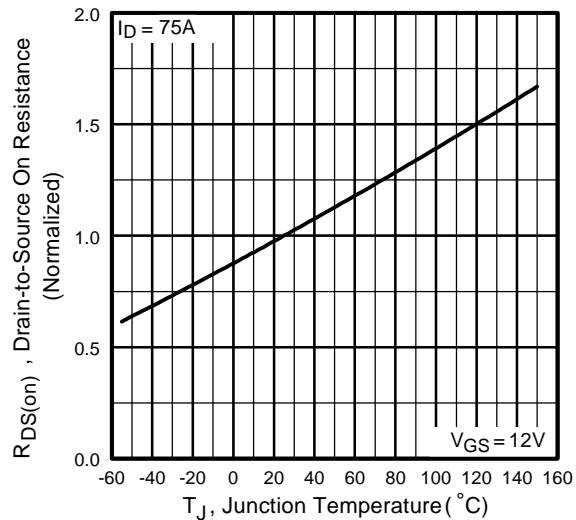


Fig a. Single Event Effect, Safe Operating Area

For footnotes refer to the last page

IRHNA57064**Pre-Irradiation****Fig 1.** Typical Output Characteristics**Fig 2.** Typical Output Characteristics**Fig 3.** Typical Transfer Characteristics**Fig 4.** Normalized On-Resistance Vs. Temperature

Pre-Irradiation

IRHNA57064

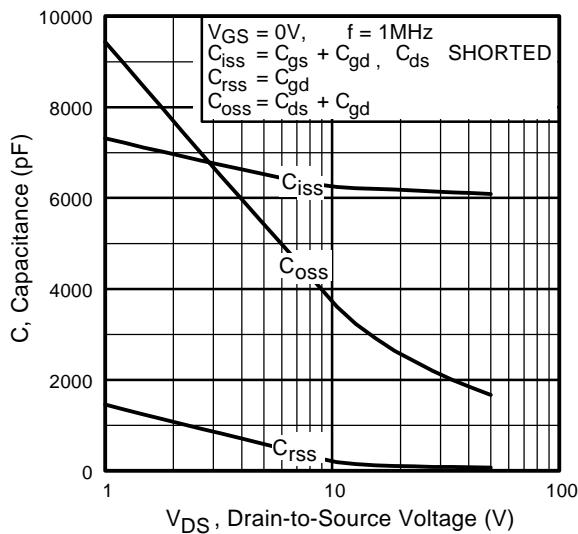


Fig 5. Typical Capacitance Vs.
Drain-to-Source Voltage

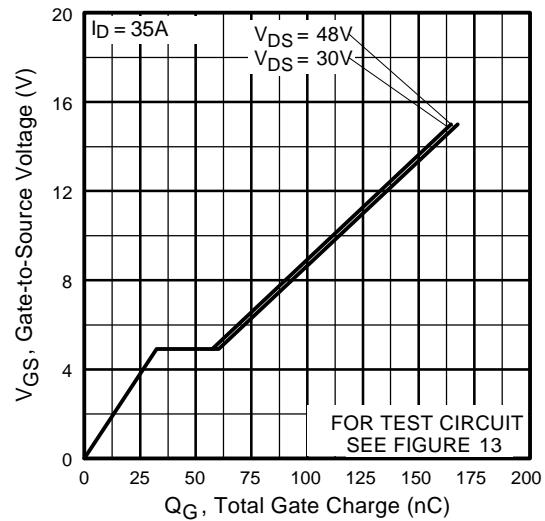


Fig 6. Typical Gate Charge Vs.
Gate-to-Source Voltage

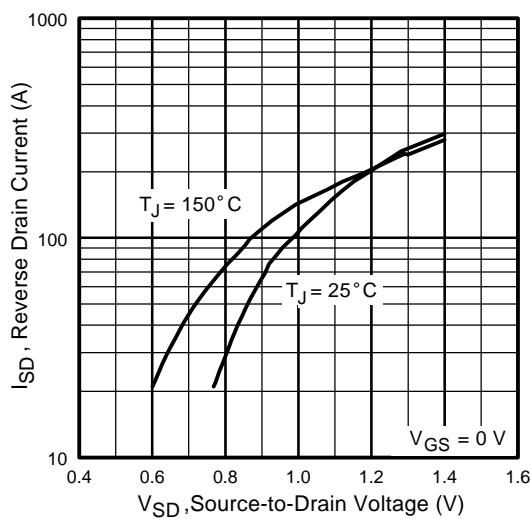


Fig 7. Typical Source-Drain Diode
Forward Voltage

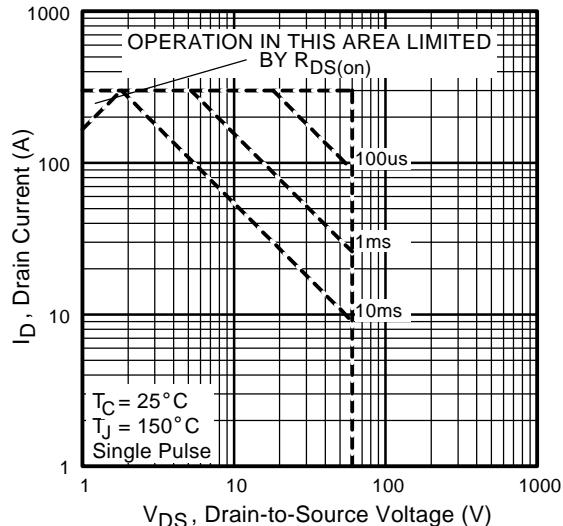


Fig 8. Maximum Safe Operating Area

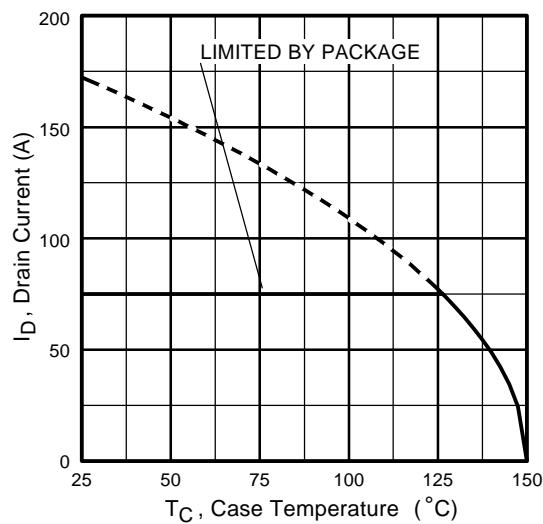


Fig 9. Maximum Drain Current Vs.
Case Temperature

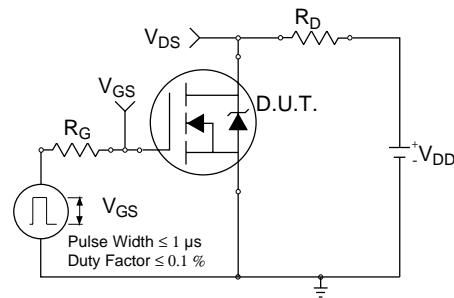


Fig 10a. Switching Time Test Circuit

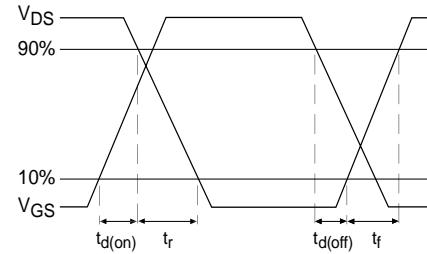


Fig 10b. Switching Time Waveforms

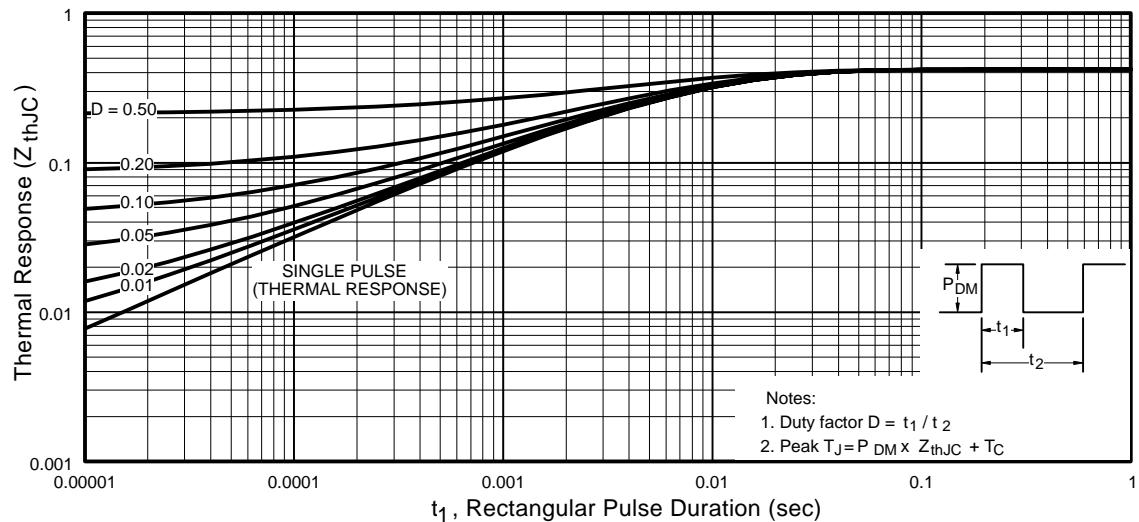


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case

Pre-Irradiation

IRHNA57064

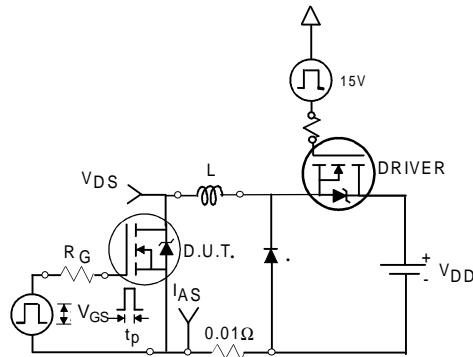


Fig 12a. Unclamped Inductive Test Circuit

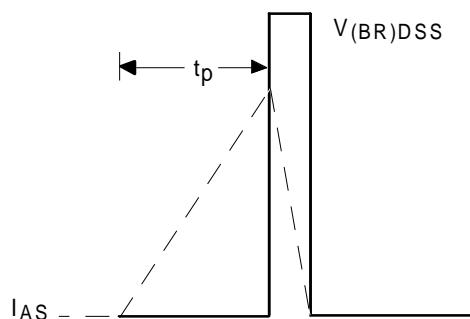


Fig 12b. Unclamped Inductive Waveforms

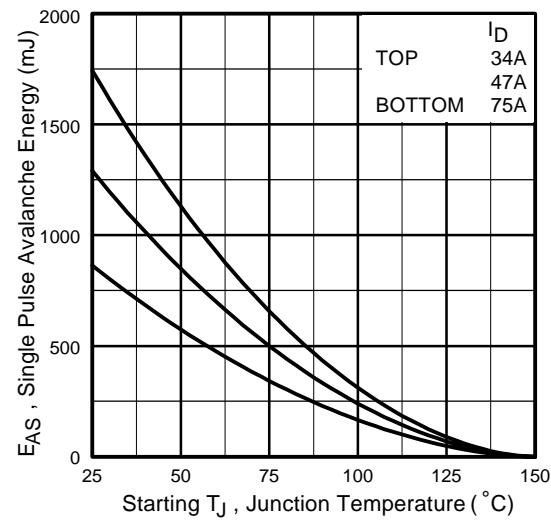


Fig 12c. Maximum Avalanche Energy Vs. Drain Current

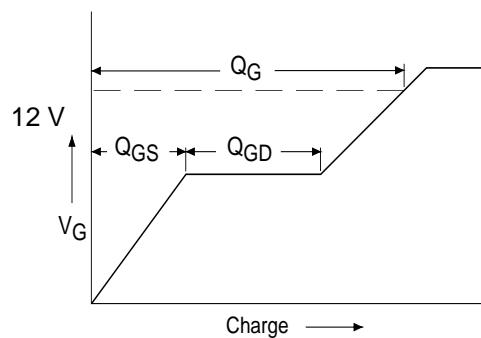


Fig 13a. Basic Gate Charge Waveform

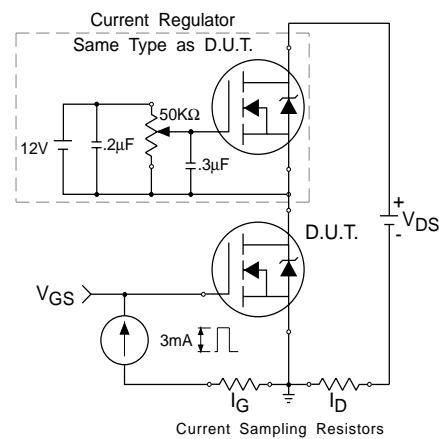
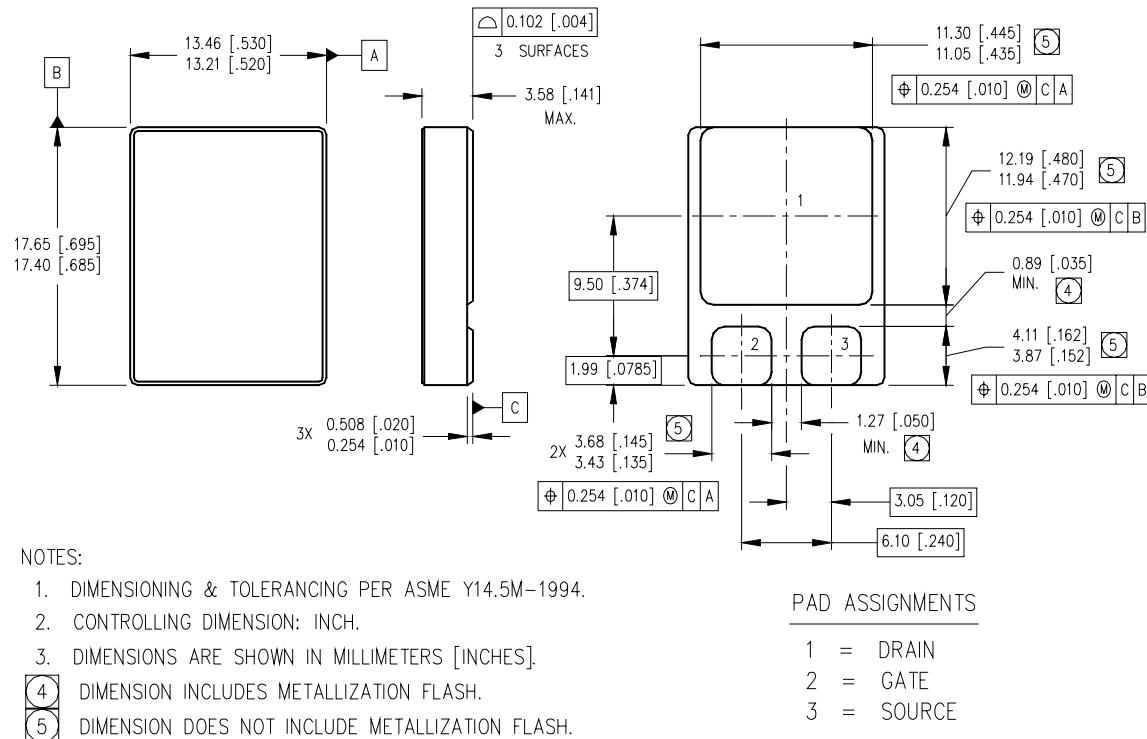


Fig 13b. Gate Charge Test Circuit

Footnotes:

- ① Repetitive Rating; Pulse width limited by maximum junction temperature.
- ② $V_{DD} = 25V$, starting $T_J = 25^\circ C$, $L = 0.3 \text{ mH}$
Peak $I_L = 75A$, $V_{GS} = 12V$
- ③ $ISD \leq 45A$, $di/dt \leq 196A/\mu s$,
 $V_{DD} \leq 60V$, $T_J \leq 150^\circ C$
- ④ Pulse width $\leq 300 \mu s$; Duty Cycle $\leq 2\%$
- ⑤ **Total Dose Irradiation with V_{GS} Bias.**
12 volt V_{GS} applied and $V_{DS} = 0$ during irradiation per MIL-STD-750, method 1019, condition A.
- ⑥ **Total Dose Irradiation with V_{DS} Bias.**
48 volt V_{DS} applied and $V_{GS} = 0$ during irradiation per MIL-STD-750, method 1019, condition A.

Case Outline and Dimensions — SMD-2

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
 TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information.
Data and specifications subject to change without notice. 09/01