

FEATURES

- ◆ Black on White Film STN Type
- ◆ Transmissive Mode

- ◆ High Brightness CFL Backlight
- ◆ High Contrast LC Material

MECHANICAL DATA

Item	Value	Unit
Module Dimensions	274*183*9	mm
Viewing Area	215.2*162.4	mm
Resolution	640*480	dots
Dot Size	0.3*0.3	mm
Dot Pitch	0.33*0.33	mm
Weight	450	g

OPTICAL DATA

Item	Symbol	Condition	Min	Typ	Max	Unit
Contrast Ratio	K	Ø=10°, Q=0°, Note 1	(10)	(18)	-	-
Brightness	-	T=25°C, IL=5mA, Note 7	(80)	(100)	-	cd/m ²
Viewing Direction		-	12			o'clock
Viewing Angle	Ø2 - Ø1	K=2, Note 1	30	40	-	degree
Response Time (Rise)	t _R	Ø=10°, Q=0°, Note 1	-	160	-	ms
Response Time (Fall)	t _F	Ø=10°, Q=0°, Note 1	-	110	-	ms

ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Condition	Min	Max	Unit
Supply Voltage (Logic)	V _{DD} - V _{SS}	-	0	6.5	V
Supply Voltage (LC Drive)	V _{DD} - V _{EE}	-	0	27.5	V
Input Voltage	V _I	Note 2	-0.3	0.3+V _{DD}	V
Operating Temperature	T _{OP}	Note 5,6	0	50	°C
Storage Temperature	T _{ST}	Note 5,6	-20	60	°C

DATA INTERFACE PIN ASSIGNMENT

Pin No	Symbol	Level	Function
1	FRAME	H	First Line Marker
2	LOAD	H->L	Data latch
3	CP	H->L	Data shift
4	Not DISP OFF	H/L	High for ON / Low for OFF
5	VDD	-	Power supply for logic
6	VSS	-	GND
7	VEE	-	Power supply for LC
8-11	UD0 - UD3	H/L	Display data (upper half)
12-15	LD0 - LD3	H/L	Display data (lower half)

CFL INTERFACE PIN ASSIGNMENT

Pin No	Symbol	Level	Function
1	HV	-	Power supply for CFL
2	NC	-	No connection
3	NC	-	No connection
4	GND	-	CFL Ground

Note 1: Definition of optical data, see page 84

Note 2: Applied to NotDISP.OFF, FRAME, LOAD, CP,LD0-LD3, UD0-UD3

Note 3: fFRAME=140Hz, UD0-UD3=0.1.0.1...LD0-LD3=1.0.1.0...VDD-V0=22.7V,T=25°C

Note 4: Recommended LCD driving may fluctuate about +/-1.0V by each module

ELECTRICAL CHARACTERISTICS

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage (Logic)	V _{DD} - V _{SS}	-	4.75	5.0	5.25	V
Supply Voltage (LC Drive)	V _{EE} - V _{SS}	-	-	-	-	V
Supply Current	I _{DD}	Note 3	-	(25.0)	(30.0)	mA
	I _{EE}	Note 3	-	(19.0)	(30.0)	mA
Input Voltage (High Level)	V _{IH}	High Level, Note 2	0.7* VDD	-	VDD	V
Input Voltage (Low Level)	V _{IL}	Low Level, Note 2	0	-	0.3* VDD	V
Frame Frequency	f _{FLM}	Note 8	(69)	-	(110)	Hz
Duty Ratio		-	-	1/244	-	-
Recommended LC Drive Voltage	V _{DD} - V _O	Duty=1/244 T=0°C, Note 4	-	(23.9)	-	V
		Duty=1/244 T=25°C, Note 4	-	(22.7)	-	V
		Duty=1/244 T=40°C, Note 4	-	(21.6)	-	V
Backlight Lamp Voltage	V _{BL}	T=25°C	-	(430)	-	Vrms
Backlight Lamp Frequency	f _{BL}	T=25°C	(50)	-	(70)	kHz
Backlight Lamp Current	I _{BL}	T=25°C	4	4.5	6	mA
Lamp Start Voltage	V _S	T=25°C, Note 9	1000	-	-	V

TIMING CHARACTERISTICS

Item	Symbol	Min	Typ	Max	Unit
Clock frequency	fCP	-	-	6.5	MHz
Clock pulse width	tW	63	-	-	ns
Rise, Fall time	tr, tf	-	-	20	ns
Data set up time	tDSU	50	-	-	ns
Data hold time	tDHD	50	-	-	ns
LOAD set up time	tLSU	80	-	-	ns
LOAD->Clock time, 3.3V	tLC	120	-	-	ns
LOAD->Clock time, 5.0V	tCL	80	-	-	ns
FRAME set up time	tSETUP	100	-	-	ns
FRAME hold time	tHOLD	100	-	-	ns
LOAD pulse width	tWC	125	-	-	ns

INVERTER AND CONNECTORS

Recommended Inverter	Starter Kit
HITACHI INVC304	START7550
Data Connector	Data Housing Connector
MOLEX 53261-1510	51021-1500
Lamp Connector	Lamp Housing Connector
mitsumi M63M83-04	M61M73-04, M60-04-30-114P or M60-04-30-134P

Note 5: Background colour of the LCD changes depending on temperature. Between 40-50°C optical characteristics of the LCD like contrast and viewing angle change but the display remains readable.


Note 6: Storage at -20°C < 48 hr, at 60°C < 168 hr

Note 7: Measurement after 10 minutes of CFL operating. Brightness control at 100%


Note 8: Need to make sure of flickering and rippling of display when setting the Frame Frequency in your set

Note 9: Starting discharge voltage is increased when LCM is operating at lower temperature. Please check the characteristics of inverter before applying.



MECHANICAL DIMENSIONS

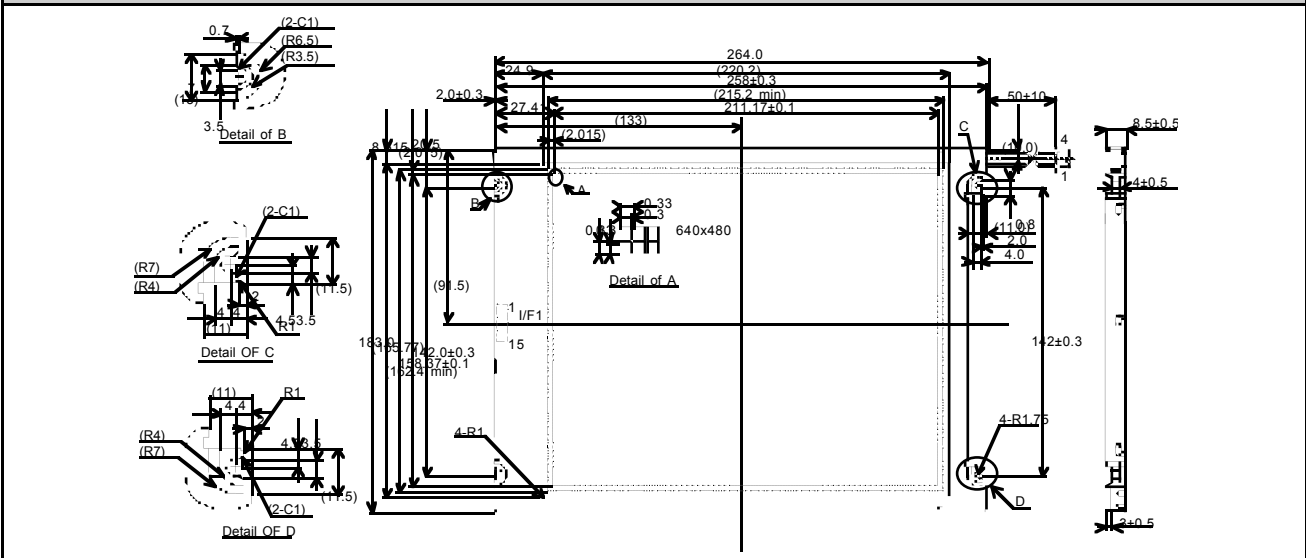



BLOCK DIAGRAM

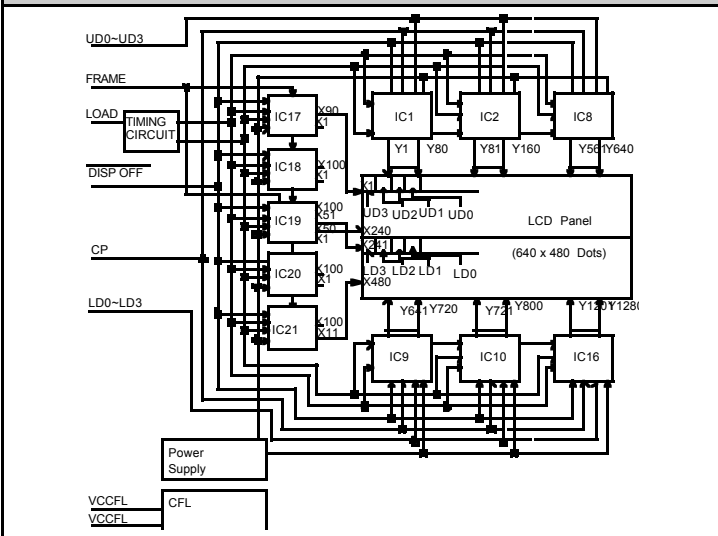

POWER SUPPLY / POWER UP TIMING DIAGRAM

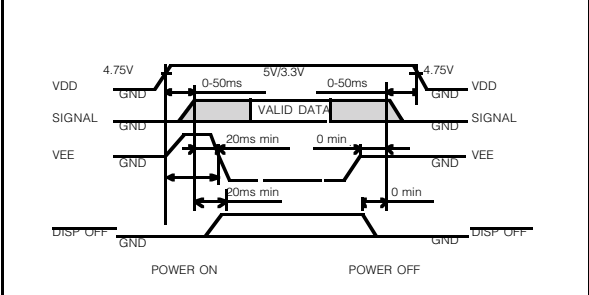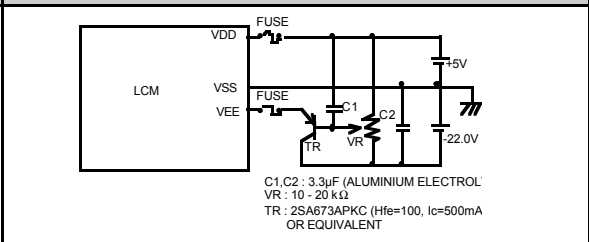

INTERFACE TIMING DIAGRAM

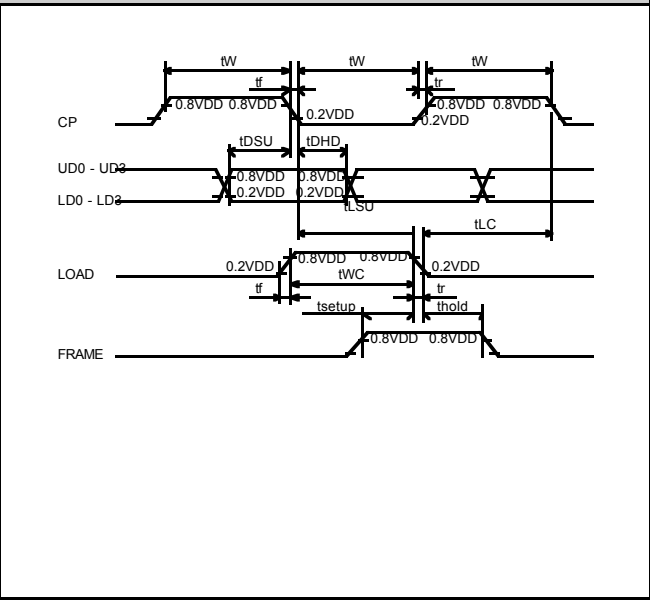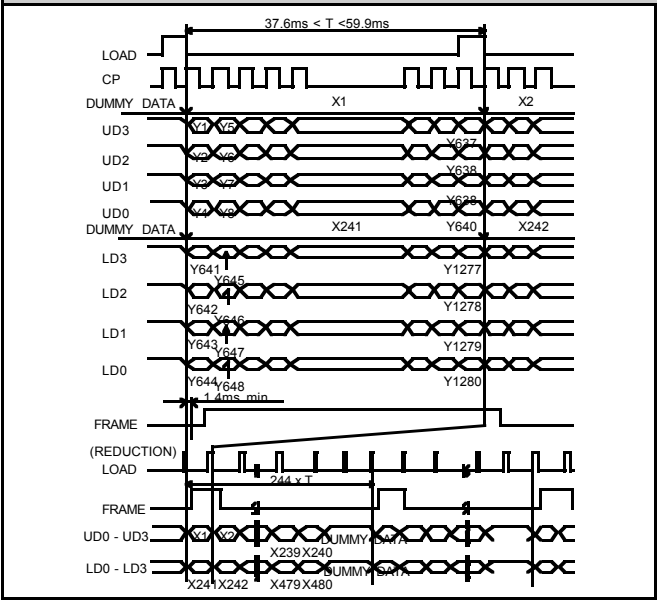

HITACHI