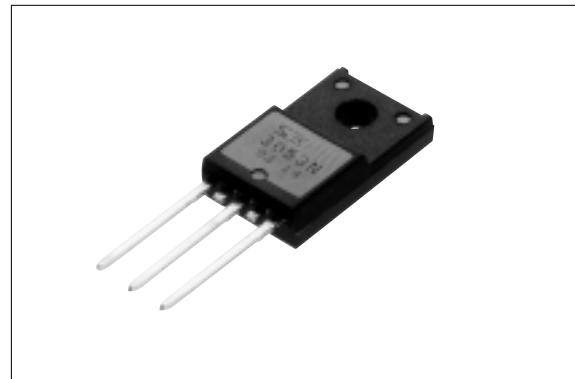


SI-3003N Series**3-Terminal, Full-Mold, Low Dropout Voltage Dropper Type****■Features**

- Compact full-mold package (equivalent to TO220)
- Output current: 1.0A
- Low dropout voltage: $V_{DIF} \leq 0.5V$ (at $I_o = 1.0A$)
- Built-in dropping overcurrent, overvoltage, thermal protection circuits
- Supports constant current load and plus/minus power supplies.

■Applications

- For stabilization of the secondary stage of switching power supplies
- Electronic equipment

**■Absolute Maximum Ratings**

(Ta=25°C)

Parameter	Symbol	Ratings			Unit
		SI-3053N	SI-3123N	SI-3153N	
DC Input Voltage	V _{IN}	25	30	30	V
DC Output Current	I _O	1.0*1			A
Power Dissipation	P _{D1}	20(With infinite heatsink)			W
	P _{D2}	1.5(Without heatsink, stand-alone operation)			W
Junction Temperature	T _j	-40 to +125			°C
Ambient Operating Temperature	T _{op}	-30 to +100			°C
Storage Temperature	T _{stg}	-40 to +125			°C
Thermal Resistance (junction to case)	R _{th(j-c)}	5.0			°C/W
Thermal Resistance (junction to ambient air)	R _{th(j-a)}	66.7(Without heatsink, stand-alone operation)			°C/W

■Electrical Characteristics

(Ta=25°C unless otherwise specified)

Parameter	Symbol	Ratings								Unit	
		SI-3053N			SI-3123N			SI-3153N			
		min.	typ.	max.	min.	typ.	max.	min.	typ.	max.	
Input Voltage	V _{IN}	6 ^{*2}		15 ^{*1}	13 ^{*2}		22 ^{*1}	16 ^{*2}		25 ^{*1}	V
Output Voltage	V _O	4.90	5.00	5.10	11.76	12.00	12.24	14.70	15.00	15.30	V
	Conditions	V _{IN} =8V, I _O =1.0A			V _{IN} =15V, I _O =1.0A			V _{IN} =18V, I _O =1.0A			
Dropout Voltage	V _{DIF}			0.5			0.5			0.5	V
	Conditions	I _O ≤1.0A									
Line Regulation	ΔV _O LINe		10	30		24	64		30	90	mV
	Conditions	V _{IN} =6V to 15V, I _O =1.0A			V _{IN} =13V to 22V, I _O =1.0A			V _{IN} =16V to 25V, I _O =1.0A			
Load Regulation	ΔV _O LAD		20	50		40	120		50	150	mV
	Conditions	V _{IN} =8V, I _O =0 to 1.0A			V _{IN} =15V, I _O =0 to 1.0A			V _{IN} =18V, I _O =0 to 1.0A			
Temperature Coefficient of Output Voltage	ΔV _O /ΔT _a		±0.5			±1.5			±1.5		mV/°C
	Conditions	V _{IN} =8V, I _O =5mA, T _j =0 to 100°C			V _{IN} =15V, I _O =5mA, T _j =0 to 100°C			V _{IN} =18V, I _O =5mA, T _j =0 to 100°C			
Ripple Rejection	R _{REJ}		54			54			54		dB
	Conditions	V _{IN} =8V, f=100 to 120Hz			V _{IN} =15V, f=100 to 120Hz			V _{IN} =18V, f=100 to 120Hz			
Quiescent Circuit Current	I _Q		3	10		3	10		3	10	mA
	Conditions	V _{IN} =8V, I _O =0A			V _{IN} =15V, I _O =0A			V _{IN} =18V, I _O =0A			
Overcurrent Protection Starting Current ^{*4,5}	I _{S1}	1.2			1.2			1.2			A
	Conditions	V _{IN} =8V			V _{IN} =15V			V _{IN} =18V			
Limited Current at Overcurrent Protection	I _{S2}	1.2			1.2			1.2			A
	Conditions	V _{IN} =8V, V _O =0A			V _{IN} =15V, V _O =0A			V _{IN} =18V, V _O =0A			


*1: V_{IN(max)} and I_{O(max)} are restricted by the relation P_{D(max)}=(V_{IN}-V_O)•I_O=20(W).

*2: Refer to the dropout voltage.(Refer to Setting DC Input Voltage on page 7.)

*3: I_{S1} is specified at -5(%) drop point of output voltage V_O on the condition that V_{IN}=V_O+3V, I_O=1A.

■External Dimensions

(unit:mm)

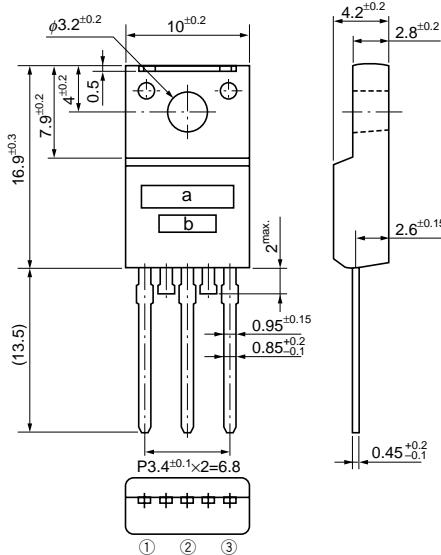

a. Part Number
b. Lot Number

Pin Arrangement


- ① GND
- ② V_O
- ③ V_{IN}

Plastic Mold Package Type


Flammability: UL94V-0

Weight: Approx. 2.3g

■Block Diagram

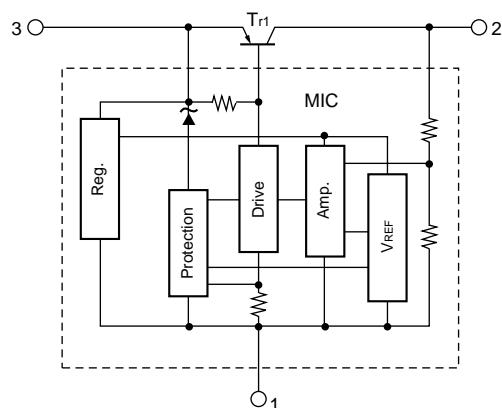

■Standard External Circuit

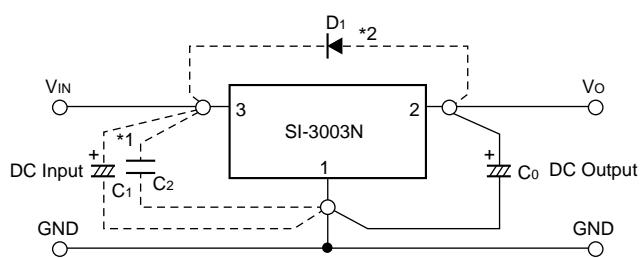

C_0 : Output capacitor (47 to 100 μ F)


*1 $C_1 \left\{ \begin{array}{l} C_1 \\ C_2 \end{array} \right\}$: Oscillation prevention capacitor
(C_1 : Approx. 47 μ F, C_2 : 0.33 μ F)

These capacitors are required if the input line is inductive and in the case of long wiring. Tantalum capacitors are recommended for C_1 and C_0 , particularly at low temperatures.

*2 D_1 : Protection diode

This diode is required for protection against reverse biasing of the input and output. Sanken EU2Z is recommended.









■Ta-Pd Characteristics

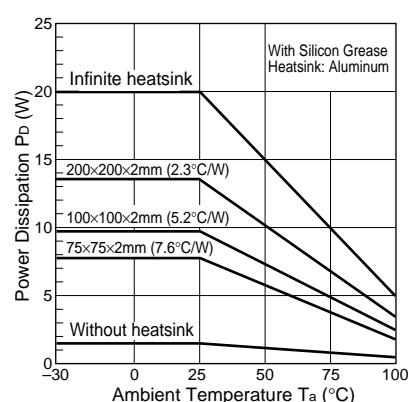

$$P_d = I_o \cdot [V_{IN(\text{mean})} - V_o]$$

■Typical Characteristics

($T_a=25^\circ\text{C}$)

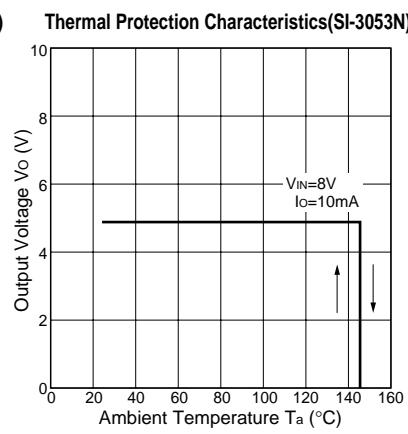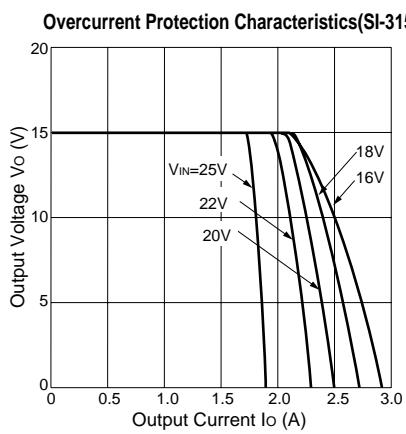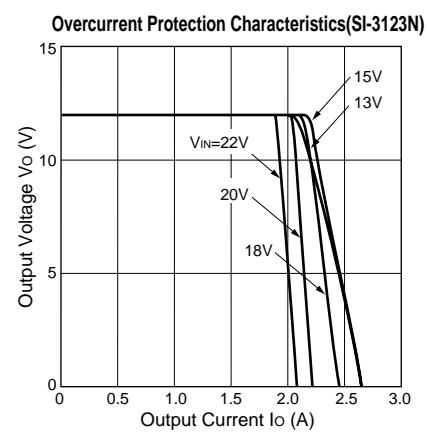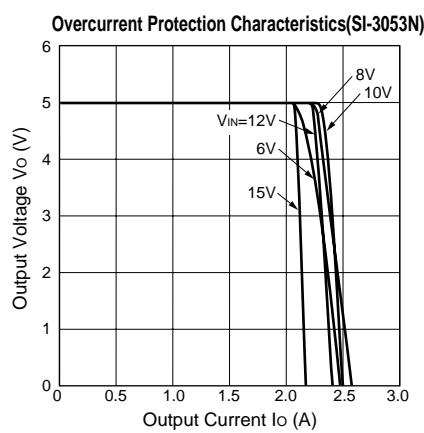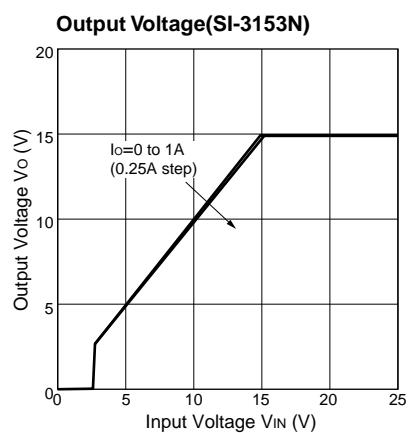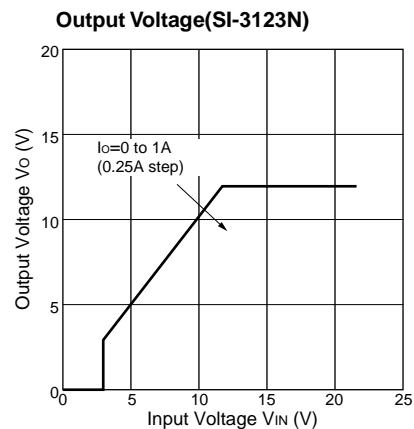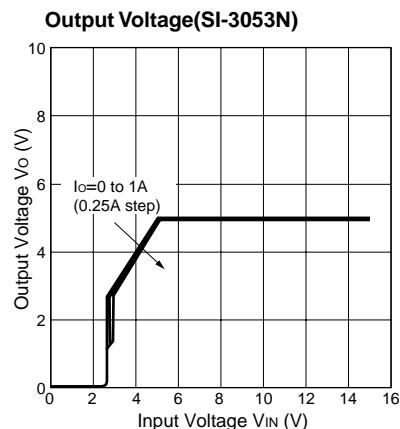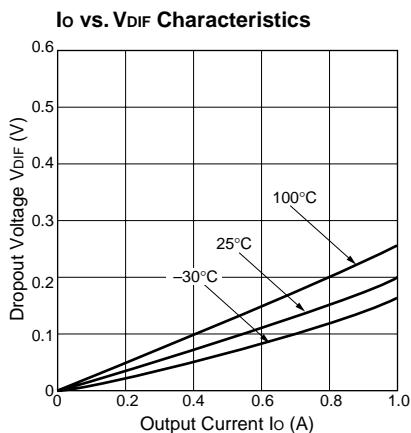

Note on Thermal Protection:

The thermal protection circuit is intended for protection against heat during instantaneous short-circuiting. Its operation is not guaranteed for continuous heating condition such as short-circuiting over extended periods of time.