

Photocoupler

KODENSHI

K3630 • K3631

These Photocouplers consist of two Gallium Arsenide Infrared Emitting Diodes and a Silicon NPN Phototransistor in a 6-pin package.

FEATURES


- Switching Time - Type 3 μ s
- Collector-Emitter Voltage : Min.35V
- Current Transfer Ratio : Typ.10% (at $I_F = \pm 10mA$, $V_{CE} = 10V$)
- Electrical Isolation Voltage : AC2500Vrms
- Without Base Connection - K3630
- With Base Connection - K3631
- UL Recognized File No. E107486

APPLICATIONS

- Interface between two circuits of different potential
- AC signal input
- Telephone set & line interface
- I/O compatible with integrated circuits

DIMENSION

(Unit : mm)

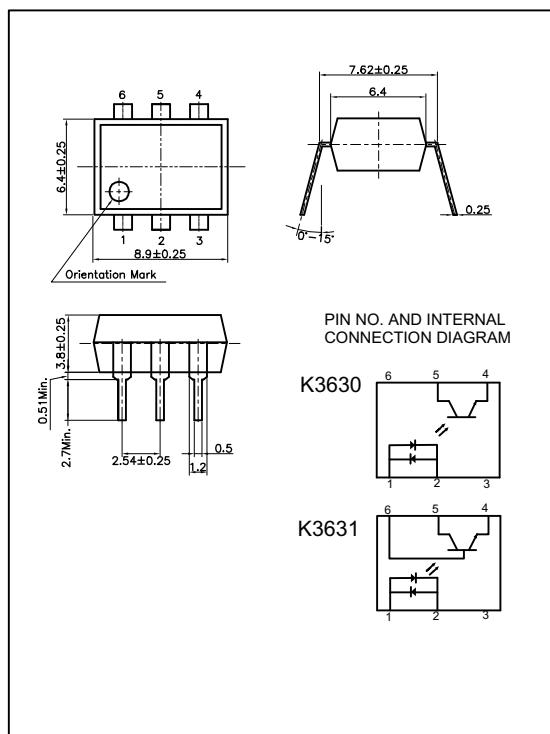

MAXIMUM RATINGS

(Ta=25 °C)

Parameter	Symbol	Rating	Unit
Input	Forward Current	IF	± 60
	Peak Forward Current ^{*1}	IFP	± 1
	Power Dissipation	Pd	70
Output	Collector-Emitter Breakdown Voltage	BVCEO	35
	Emitter-Collector Breakdown Voltage	BVECO	6
	Collector-Base Breakdown Voltage ^{**}	BVCBO	70
	Emitter-Base Breakdown Voltage ^{**}	BVEBO	6
	Collector Current	Ic	50
	Collector Power Dissipation	Pc	150
Input to Output Isolation Voltage ^{*2}	Viso	AC2500	Vrms
Storage Temperature	Tstg	-55~+125	
Operating Temperature	Topr	-30~+100	
Lead Soldering Temperature ^{*3}	Tsol	260	
Total Power Dissipation	Ptot	200	mW

^{**} Except for K3630

^{*1}. Input current with 100 μ s pulse width, 1% duty cycle

^{*2}. Measured at RH=40~60% for 1min

^{*3}. 1/16 inch form case for 10sec

Photocoupler



K3630 • K3631

ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25 °C, unless otherwise noted)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit.
Input	Forward Voltage	V _F	I _F =10mA	-	1.15	1.30	V
	Capacitance	C _T	V=0, f=1MHz	-	30	-	pF
Output	Collector-Emitter Breakdown Voltage	BV _{CEO}	I _C =1mA	35	-	-	V
	Emitter-Collector Breakdown Voltage	BV _{ECO}	I _E =0.1mA	6	-	-	V
	Collector-Base Breakdown Voltage **	BV _{CBO}	I _C =0.1mA	70	-	-	V
	Emitter-Base Breakdown Voltage **	BV _{EBO}	I _E =0.1mA	6	-	-	V
	Collector Dark Current	I _{CEO}	I _F =0, V _{CE} =10V	-	-	100	nA
	Capacitance	C _{CE}	V _{CE} =0, f=1MHz	-	10	-	pF
Coupled	Current Transfer Ratio *4	CTR	I _F =10mA, V _{CE} =10V	50	-	200	%
	Collector-Emitter Saturation Voltage	V _{CE(SAT)}	I _F =10mA, I _C =0.5mA	-	-	0.4	V
	Input-Output Capacitance	C _{IO}	V=0, f=1MHz	-	2	-	pF
	Input-Output Isolation Resistance	R _{IO}	RH=40~60%, V=500V	-	10 ¹¹	-	
	Rise Time	tr	V _{CE} =5V, R _L =100Ω	-	3	-	μs
	Fall Time	tf	I _C =2mA	-	3	-	μs
CTR Symmetry		CTR1/CTR2		0.33	-	3.0	

** Except for K3630


*4. CTR=(I_C/I_F) X 100 (%)

Photocoupler


KODENSHI

K3630 • K3631


**Forward Current vs.
Ambient Temperature**

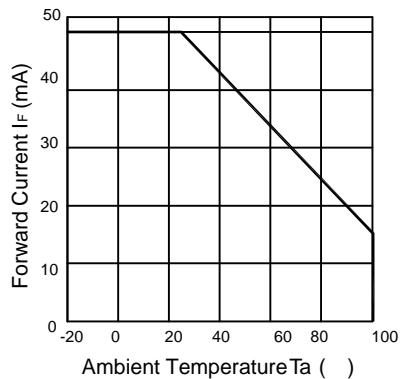


**Collector Power Dissipation vs.
Ambient Temperature**

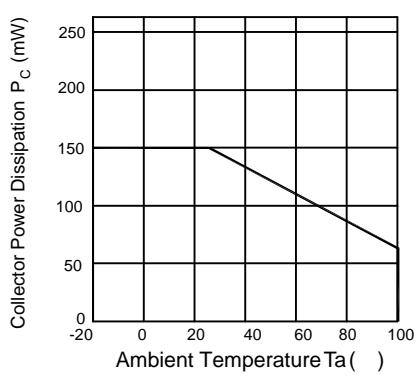


**Forward Current vs.
Forward Voltage**

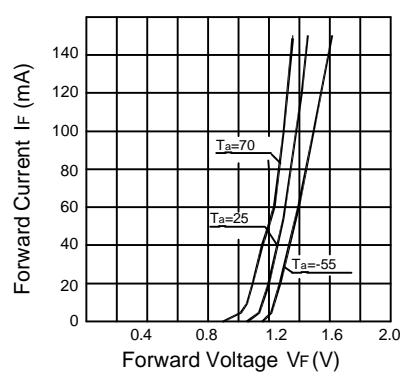


**Collector Current vs.
Collector-Emitter Voltage**

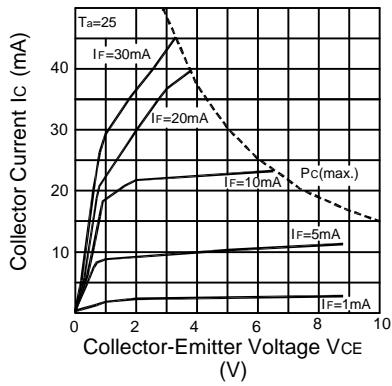


**Dark Current vs.
Ambient Temperature**

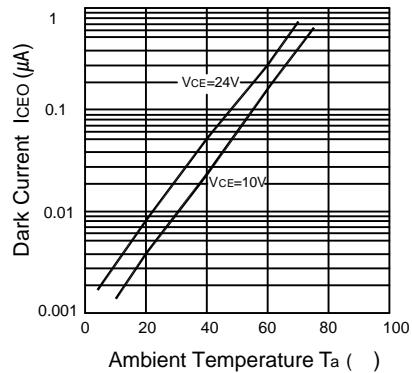


**Collector Current vs.
Ambient Temperature**

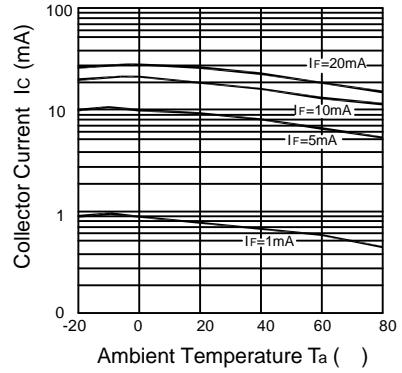

**Response Time vs.
Load Resistance**

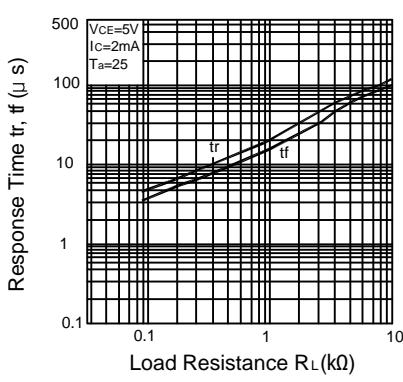

**Collector Current vs.
Forward Current**

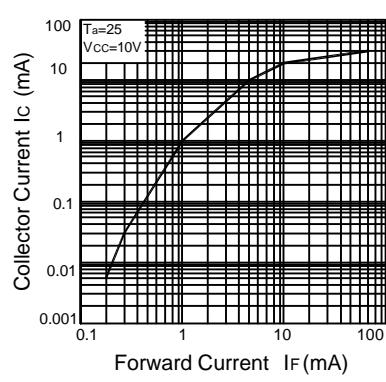

Switching Time Test Circuit

