






ZF-1519-3

Operating Voltage= 115/240 Vac
 Operating Current Max= 3.0 amp
 Operating Frequency= 50—400 Hz
 Temperature Operating= —20 TO 50 deg. C
 Die Withstand (Line to Case)= 1500V~ for 1 Min
 Die Withstand (Line to Line)= 1500Vdc for 1min
 Leakage Current = 1.2 ma @ 250 VAC, 60Hz
 Discharge after 1.0 sec.= 34 V Max

Order Part Number ZF-1519-3

The ZF-1519-3 filter is configured to work with systems that need to meet MIL-STD-461D or E. The filter is designed with feed through capacitors so that the minimum common mode insertion loss of 60 db can be maintained out to the frequency of 1Ghz and beyond.

If more stringent environmental characteristics are needed, this filter can be adapted with minimal design changes

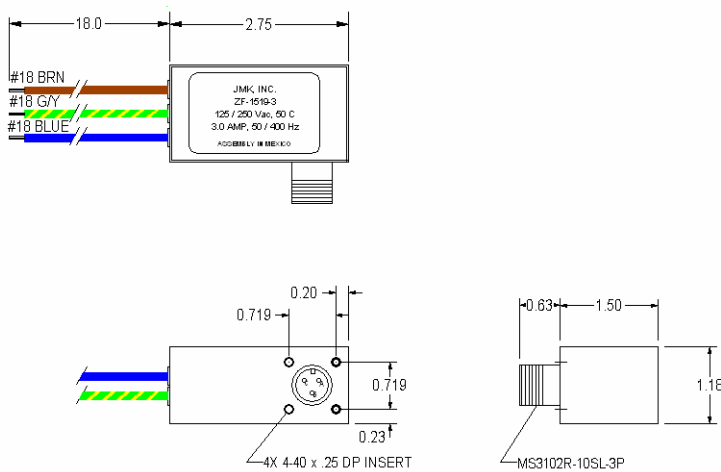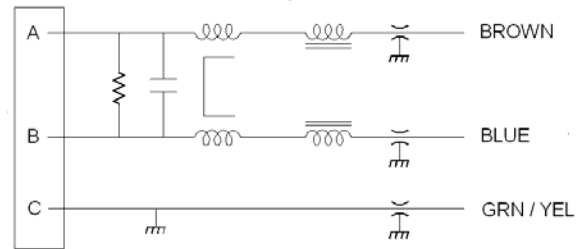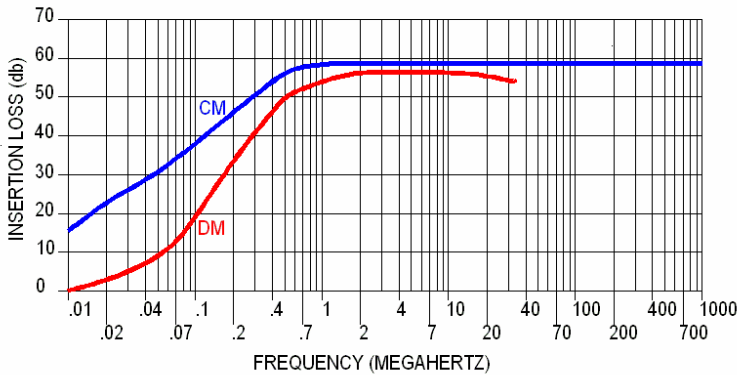

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
 email: info@jmkfilters.com
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884