

# Radar Pulsed Power Transistor, 65W, 100μs Pulse, 10% Duty 3.1 - 3.4 GHz


## PH3134-65M

### Features

- NPN Silicon Microwave Power Transistor
- Common Base Configuration
- Broadband Class C Operation
- High Efficiency Interdigitated Geometry
- Diffused Emitter Ballasting Resistors
- Gold Metalization System
- Internal Input and Output Impedance Matching
- Hermetic Metal/Ceramic Package

### Absolute Maximum Ratings at 25°C

| Parameter                 | Symbol    | Rating      | Units |
|---------------------------|-----------|-------------|-------|
| Collector-Emitter Voltage | $V_{CES}$ | 65          | V     |
| Emitter-Base Voltage      | $V_{EBO}$ | 3.0         | V     |
| Collector Current (Peak)  | $I_C$     | 7.7         | A     |
| Total Power Dissipation   | $P_{TOT}$ | 350         | W     |
| Junction Temperature      | $T_J$     | 200         | °C    |
| Storage Temperature       | $T_{STG}$ | -65 to +200 | °C    |

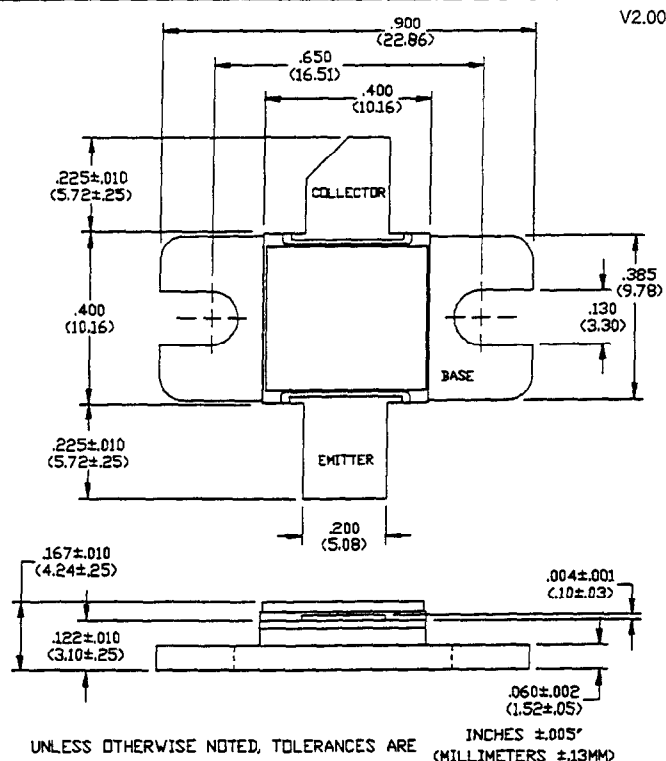


### Electrical Characteristics at 25°C


| Parameter                           | Symbol       | Min | Max  | Units | Test Conditions                                         |
|-------------------------------------|--------------|-----|------|-------|---------------------------------------------------------|
| Collector-Emitter Breakdown Voltage | $BV_{CES}$   | 65  | -    | V     | $I_C=25$ mA                                             |
| Collector-Emitter Leakage Current   | $I_{CES}$    | -   | 5.0  | mA    | $V_{CE}=36$ V                                           |
| Thermal Resistance                  | $R_{TH(JC)}$ | -   | 0.5  | °C/W  | $V_{CC}=36$ V, $P_{OUT}=65$ W, $F=3.10, 3.25, 3.40$ GHz |
| Input Power                         | $P_{IN}$     | -   | 11.6 | W     | $V_{CC}=36$ V, $P_{OUT}=65$ W, $F=3.10, 3.25, 3.40$ GHz |
| Power Gain                          | $G_p$        | 7.5 | -    | dB    | $V_{CC}=36$ V, $P_{OUT}=65$ W, $F=3.10, 3.25, 3.40$ GHz |
| Collector Efficiency                | $\eta_c$     | 35  | -    | %     | $V_{CC}=36$ V, $P_{OUT}=65$ W, $F=3.10, 3.25, 3.40$ GHz |
| Input Return Loss                   | RL           | 6   | -    | dB    | $V_{CC}=36$ V, $P_{OUT}=65$ W, $F=3.10, 3.25, 3.40$ GHz |
| Load Mismatch Tolerance             | VSWR-T       | -   | 2:1  | -     | $V_{CC}=36$ V, $P_{OUT}=65$ W, $F=3.25$ GHz             |

### Broadband Test Fixture Impedances

| F(GHz) | $Z_{IF}(\Omega)$ | $Z_{OF}(\Omega)$ |
|--------|------------------|------------------|
| 3.10   | 11.2 - j11.7     | 8.1 - j5.3       |
| 3.25   | 11.5 - j9.5      | 7.1 - j4.3       |
| 3.40   | 12.7 - j7.6      | 6.4 - j3.3       |

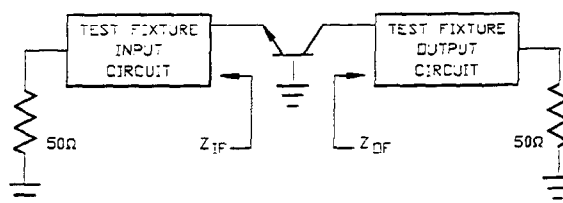

RF Test Fixture

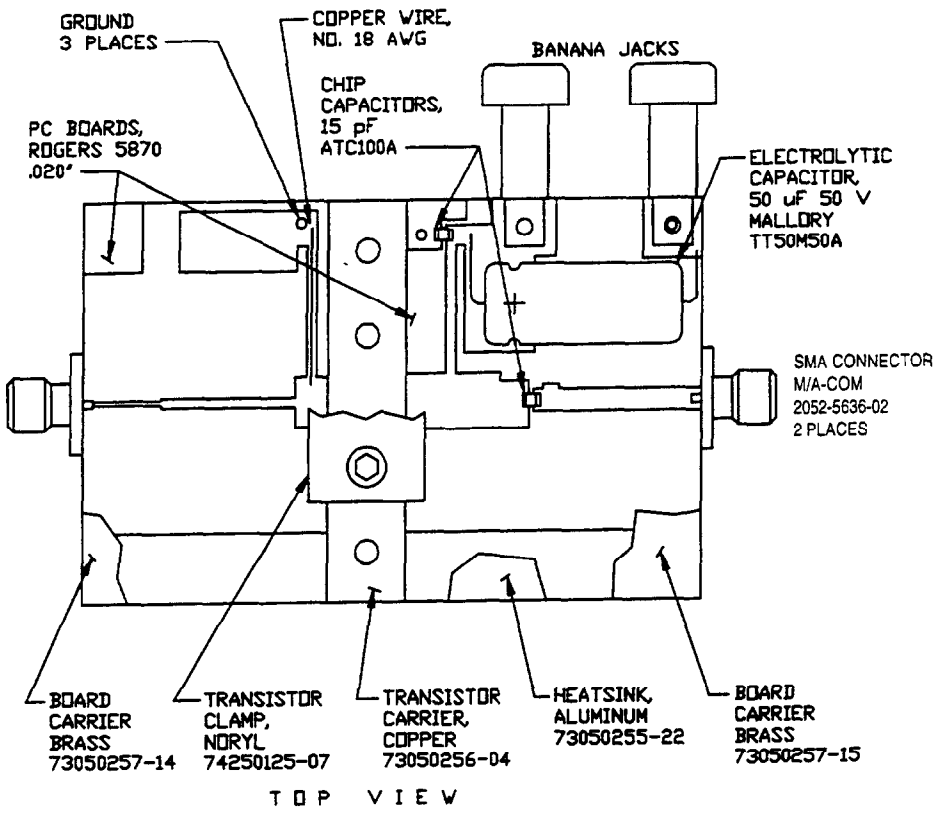

Test Fixture PC Board Dimensions

