
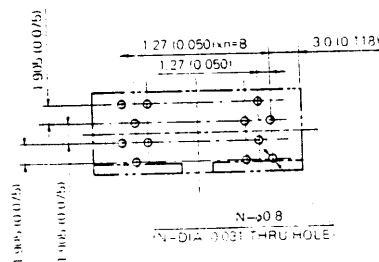


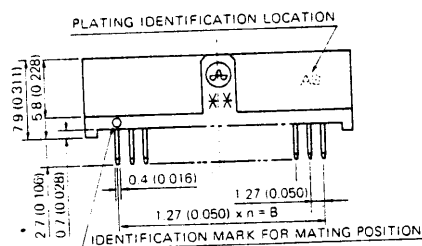
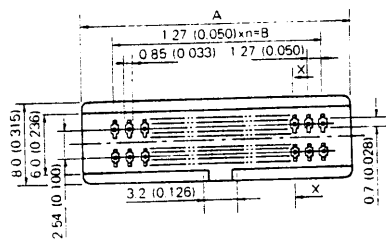


BOARD TO BOARD SOCKET

0.635mm PITCH (25MIL PITCH)

NFS-00A-1314




FLY LEAD PATTERN, PATTERN DOWN THRU TOP OF CONNECTOR

Example NFS-100A-1314 = 100 way straight box socket.

Part No	No of Contacts	A	1.27(0.050)x n = B
NFS 10A 1314	10	11.08(0.436)	1.27(0.050)x 4 = 5.08(0.200)
NFS 16A 1314	16	14.89(0.586)	1.27(0.050)x 7 = 8.89(0.350)
NFS 20A 1314	20	17.43(0.686)	1.27(0.050)x 9 = 11.43(0.450)
NFS 26A 1314	26	21.24(0.836)	1.27(0.050)x 12 = 15.24(0.600)
NFS 34A 1314	34	26.32(1.036)	1.27(0.050)x 16 = 20.32(0.800)
NFS 40A 1314	40	30.13(1.186)	1.27(0.050)x 19 = 24.13(0.950)
NFS 50A 1314	50	36.48(1.436)	1.27(0.050)x 24 = 30.48(1.200)
NFS 60A 1314	60	42.83(1.686)	1.27(0.050)x 29 = 36.83(1.450)
NFS 64A 1314	64	45.37(1.786)	1.27(0.050)x 31 = 39.37(1.550)
NFS 80A 1314	80	55.53(2.186)	1.27(0.050)x 39 = 49.53(1.950)
NFS 100A 1314	100	68.23(2.686)	1.27(0.050)x 49 = 62.23(2.450)

PART NUMBER IDENTIFICATION

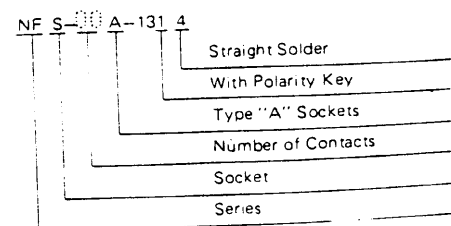

Remarks: Add "A" mark after last digit of type No., if you want 30 microinch gold plating.

Under long term planning.